

Notes:

This is test of a representative sample. If you have difficulties reproducing these results, check your analyzer set-up and ancillary equipment carefully, ensure your analyzer has had a recent calibration, and contact the analyzer manufacturer for help if necessary. If you still have significantly different results, please contact info@schiiit.com with a copy of your results so we can bring back your product and check it against our standard.

Summary

Balanced

Level and Gain	✓ PASSED
DC Level	✓ PASSED
Signal Analyzer 0dB	✓ PASSED
Signal Analyzer -20dB	✓ PASSED
Signal Analyzer -60dB	✓ PASSED
Signal Analyzer -120dB	✓ PASSED
Signal Analyzer -144dB	✓ PASSED
Frequency Response	✓ PASSED
Signal to Noise Ratio	✓ PASSED
THD+N	✓ PASSED
IMD Level Sweep (CCIF)	✓ PASSED
IMD Frequency Sweep (CCIF)	✓ PASSED
Crosstalk, One Channel Undriven	✓ PASSED
Bandpass Level Sweep	✓ PASSED


Single Ended

Level and Gain	✓ PASSED
DC Level	✓ PASSED
Signal Analyzer 0dB	✓ PASSED
Signal Analyzer -20dB	✓ PASSED
Signal Analyzer -60dB	✓ PASSED
Signal Analyzer -120dB	✓ PASSED
Signal Analyzer -144dB	✓ PASSED
Frequency Response	✓ PASSED
Signal to Noise Ratio	✓ PASSED
THD+N	✓ PASSED
IMD Level Sweep (CCIF)	✓ PASSED
IMD Frequency Sweep (CCIF)	✓ PASSED
Crosstalk, One Channel Undriven	✓ PASSED
Bandpass Level Sweep	✓ PASSED

Jitter

Jitter Level Sweep	✓ PASSED
--------------------	----------

Sequence Result:

Sequence Result:  PASSED

APx Instrument

Instrument ID: 11571
Calibration Date: 3/23/2021
APx Version: 6.0.2.600.149330

Balanced : Signal Path Setup

Output Connector:	ASIO
Asio Device:	ASIO4ALL v2
Scaling Mode:	Digital
Output Sample Rate:	48.0000 kHz
Output Latency:	Auto
Buffer Size:	512
Clock Source:	Big Ben
Input 1:	Analog Balanced
Input Bandwidth:	AC (<10 Hz) - 20 kHz (44.1 kHz SR)
Input EQ:	None
Channels:	2
Termination:	200 kohm
High Performance Sine Analyzer:	Enabled
Input 2:	None
Device Delay:	0.000 s
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
Analog Input	
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V

Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising

Balanced : Level and Gain

Waveform:	Sine
Generator Level:	-0.000 dBFS
DC Offset:	0.000 D
Frequency:	1.00000 kHz
Low-pass Filter:	Signal Path

RMS Level (5/26/2022 12:23:44.563 PM)

Ch1	3.989 Vrms
Ch2	3.990 Vrms

Balanced : DC Level

Waveform:	Sine
Generator Level:	$-\infty$ dBFS
DC Offset:	0.000 D
Frequency:	1.00000 kHz
Delay Time:	100.0 ms
Acquisition Time:	333.0 ms


DC Level (5/26/2022 12:23:45.791 PM)

Ch1	-213.5 uV
Ch2	-47.93 uV

Balanced : Signal Analyzer 0dB

Waveform: Sine
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 5/26/2022 12:23:49 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 32K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (5/26/2022 12:23:49.905 PM)

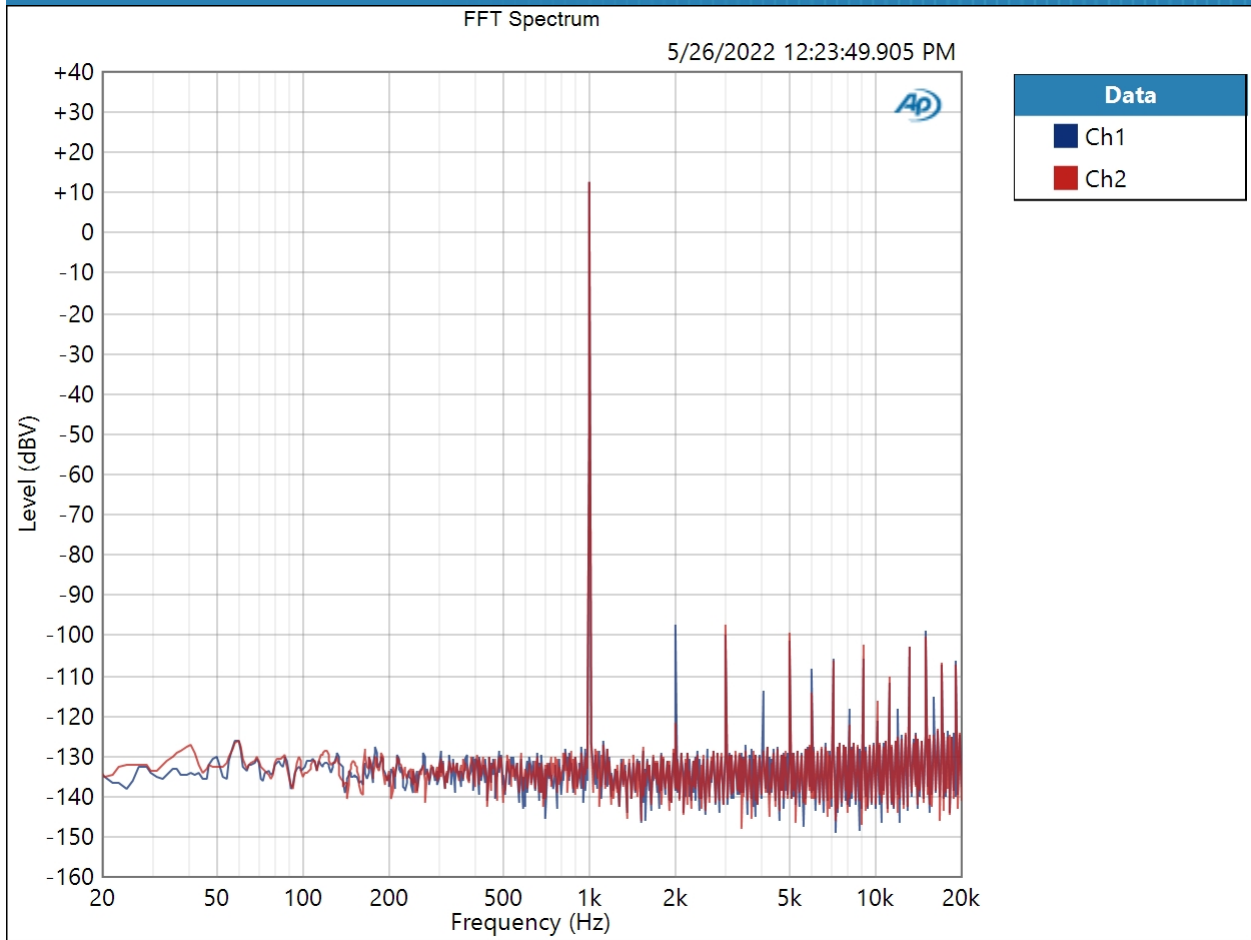


Result:  PASSED

Balanced : Signal Analyzer -20dB

Waveform: Sine
Generator Level: -20.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 5/26/2022 12:23:54 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 32K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (5/26/2022 12:23:54.092 PM)

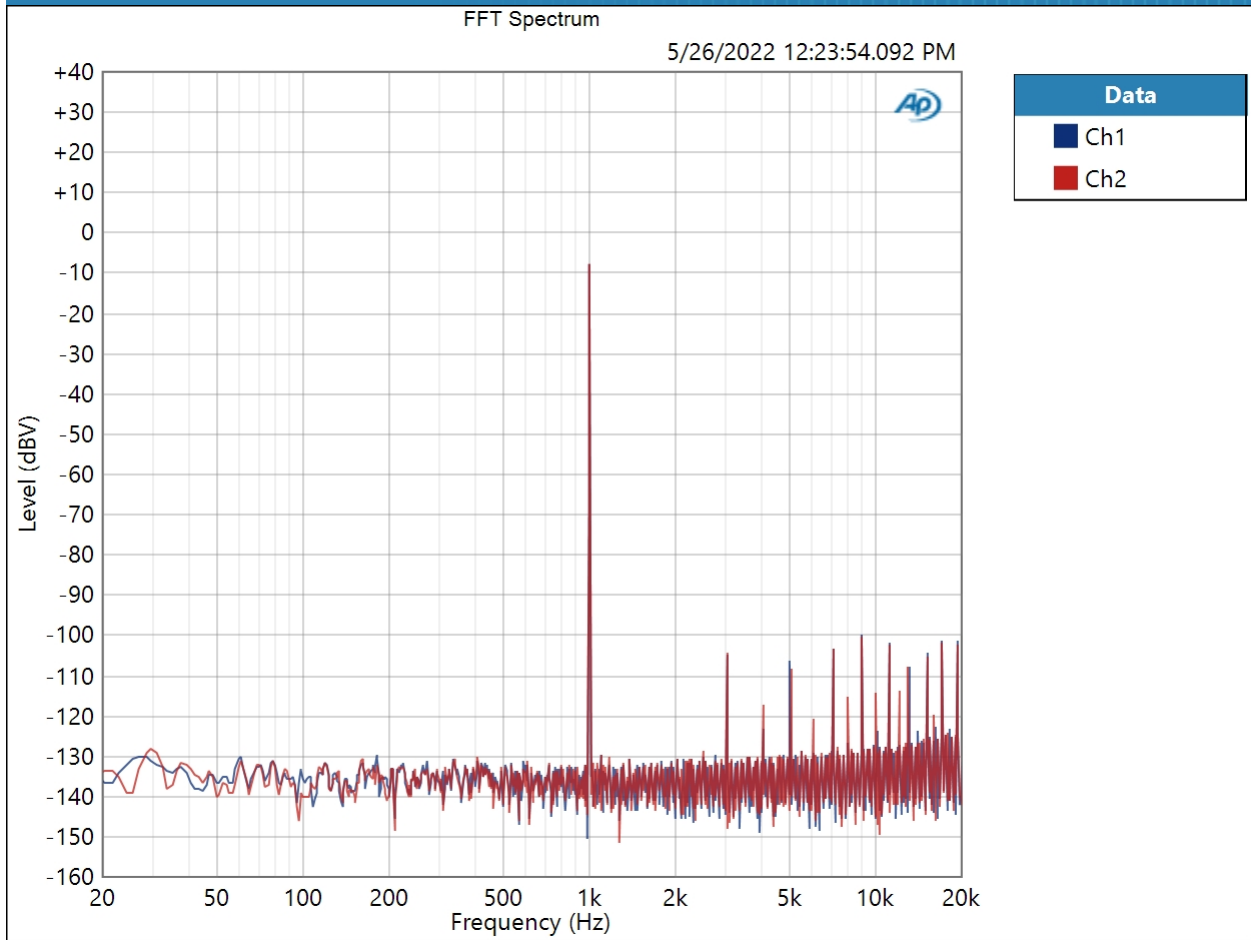


Result:  PASSED

Balanced : Signal Analyzer -60dB

Waveform: Sine
Generator Level: -60.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 5/26/2022 12:23:58 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 32K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (5/26/2022 12:23:58.105 PM)

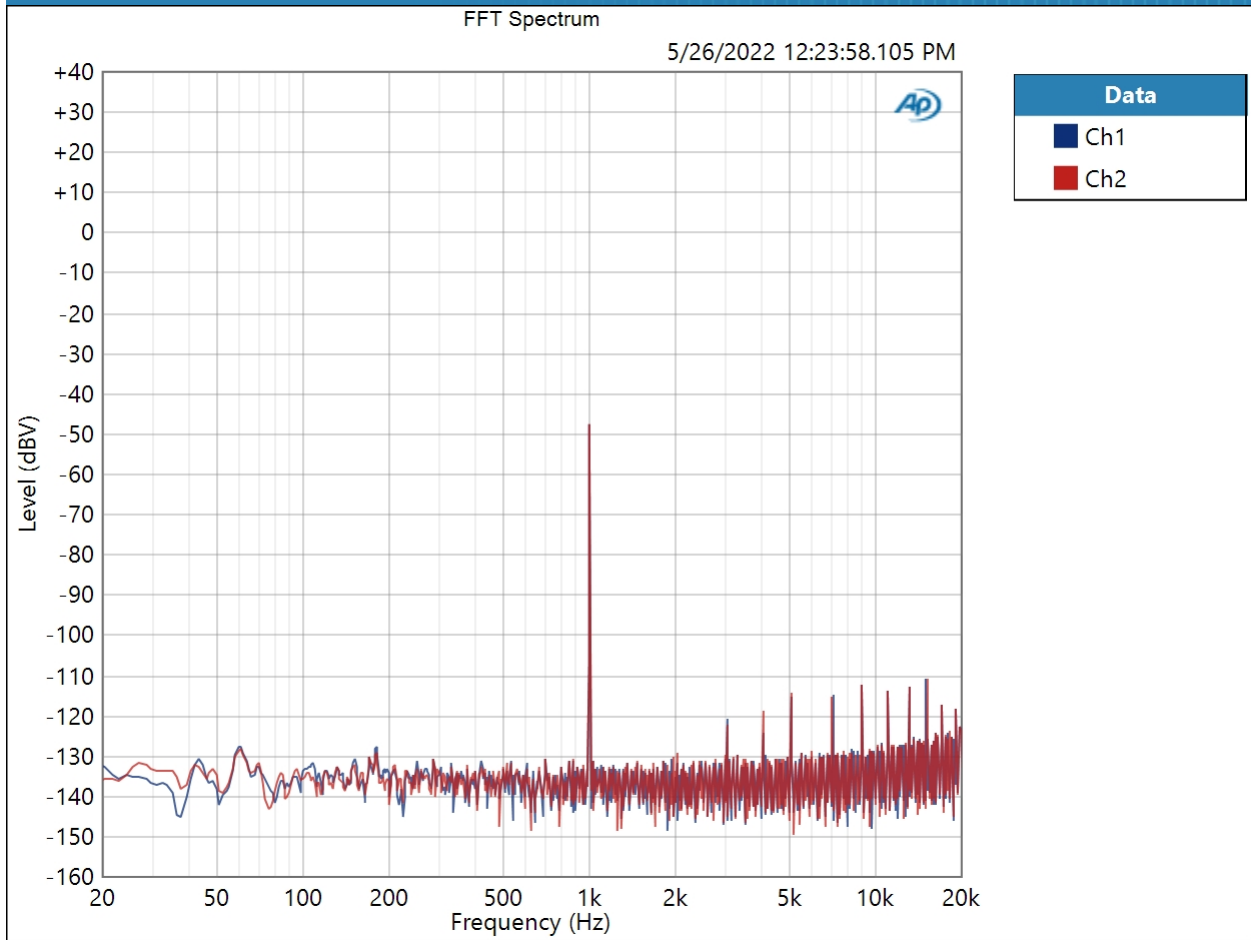


Result:  PASSED

Balanced : Signal Analyzer -120dB

Waveform: Sine
Generator Level: -120.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 5/26/2022 12:24:18 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 256K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (5/26/2022 12:24:18.300 PM)

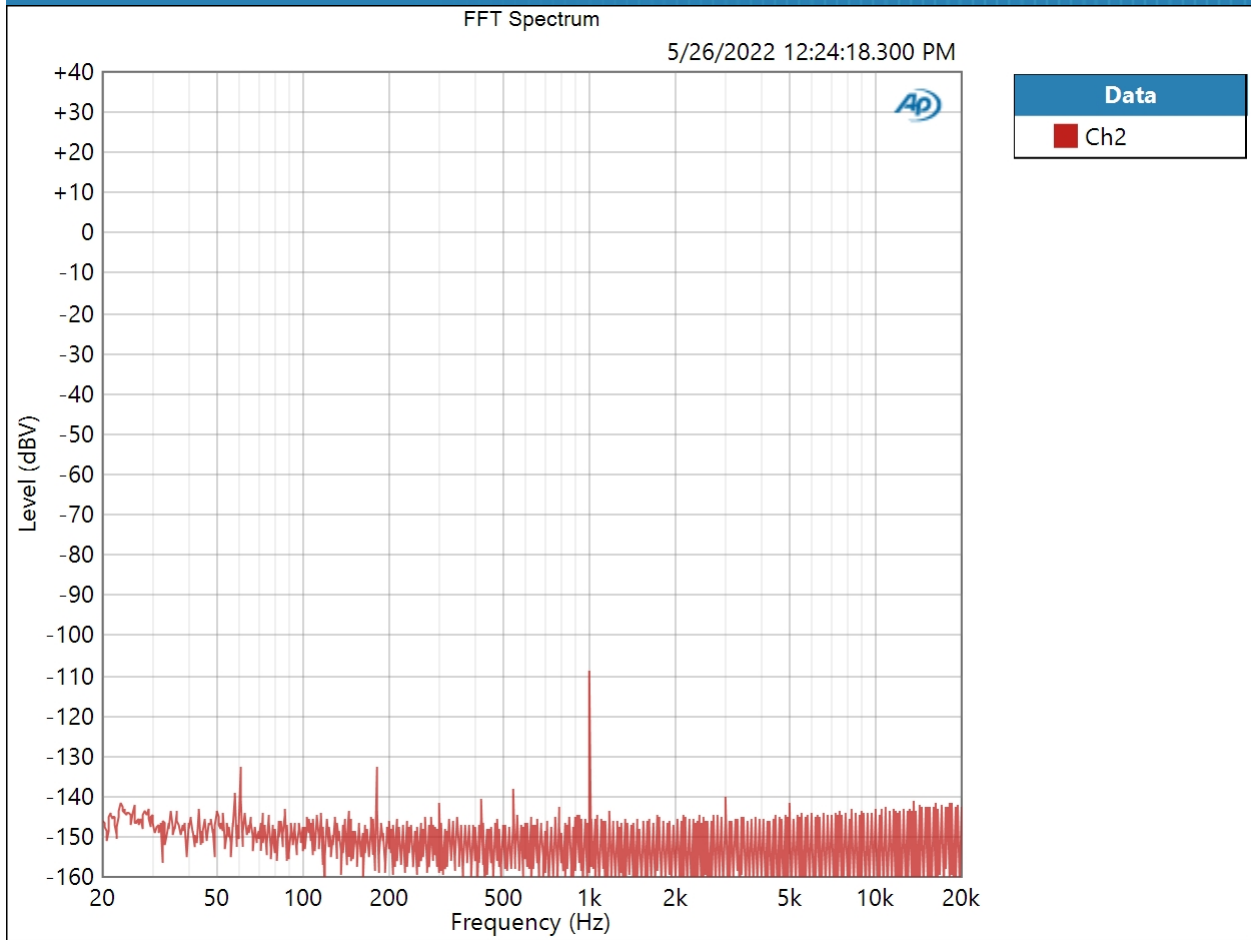


Result:  PASSED

Balanced : Signal Analyzer -144dB

Waveform: Sine
Generator Level: -144.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 5/26/2022 12:24:38 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 256K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (5/26/2022 12:24:38.511 PM)

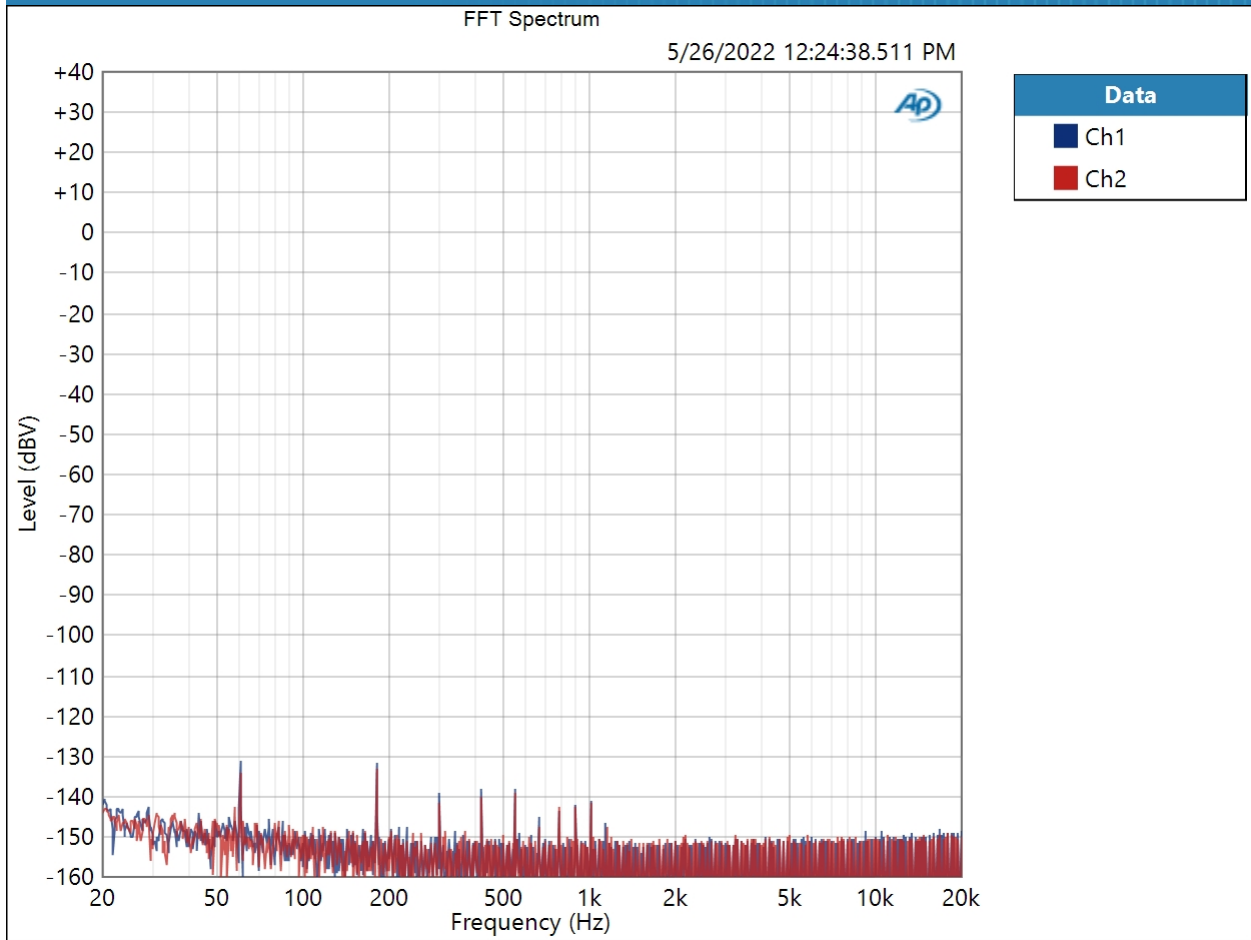


Result: PASSED

Balanced : Frequency Response


Start Frequency: 20.0000 Hz
Stop Frequency: 20.0000 kHz
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
EQ: None
Pre-Sweep: 100.0 ms
Sweep: 350.0 ms
Extend Acquisition By: 500.0 ms
Secondary Source: None
Measured 1 5/26/2022 12:24:41 PM

RMS Level (5/26/2022 12:24:41.578 PM)

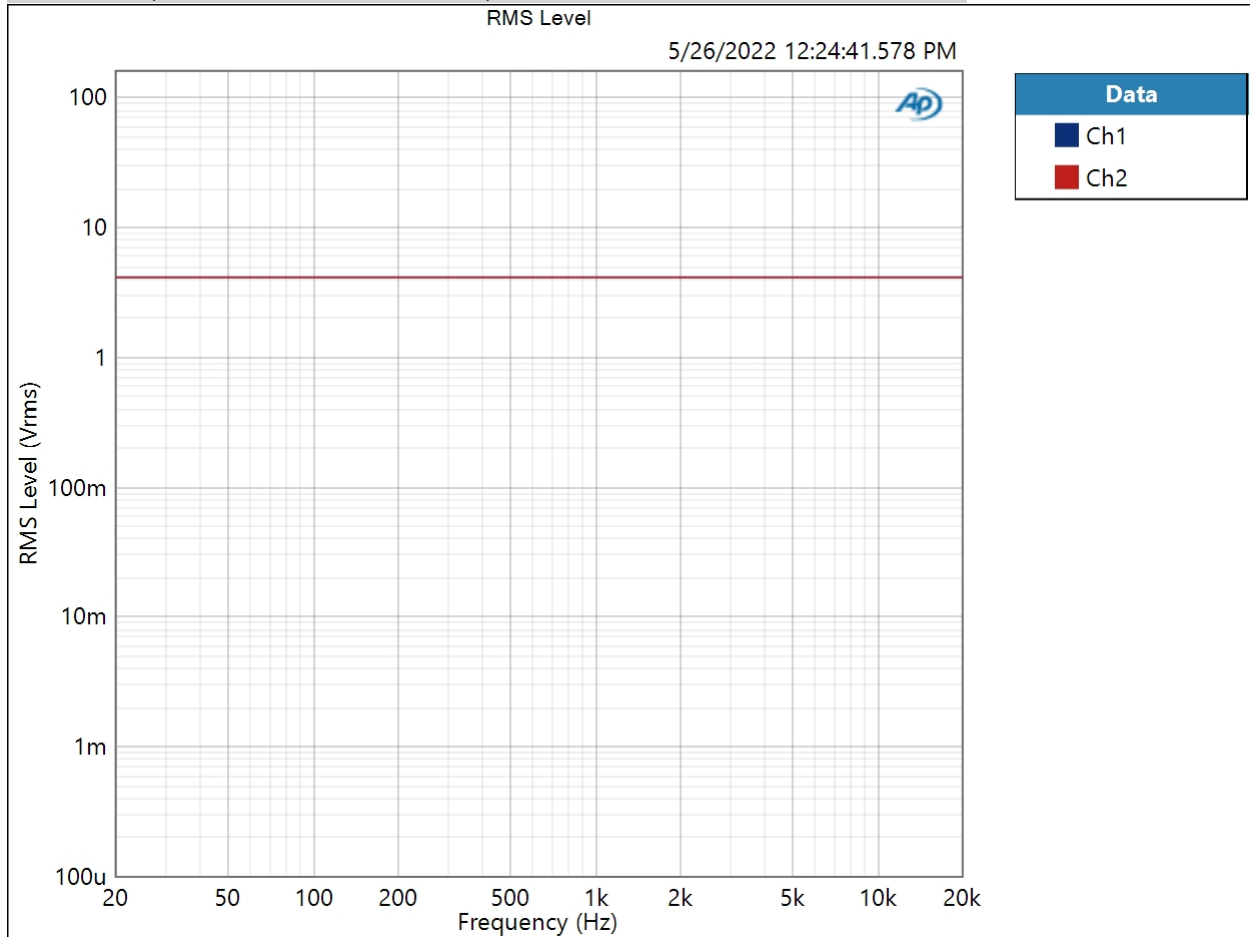

Result: PASSED

Relative Level (1.00000 kHz) (5/26/2022 12:24:41.578 PM)

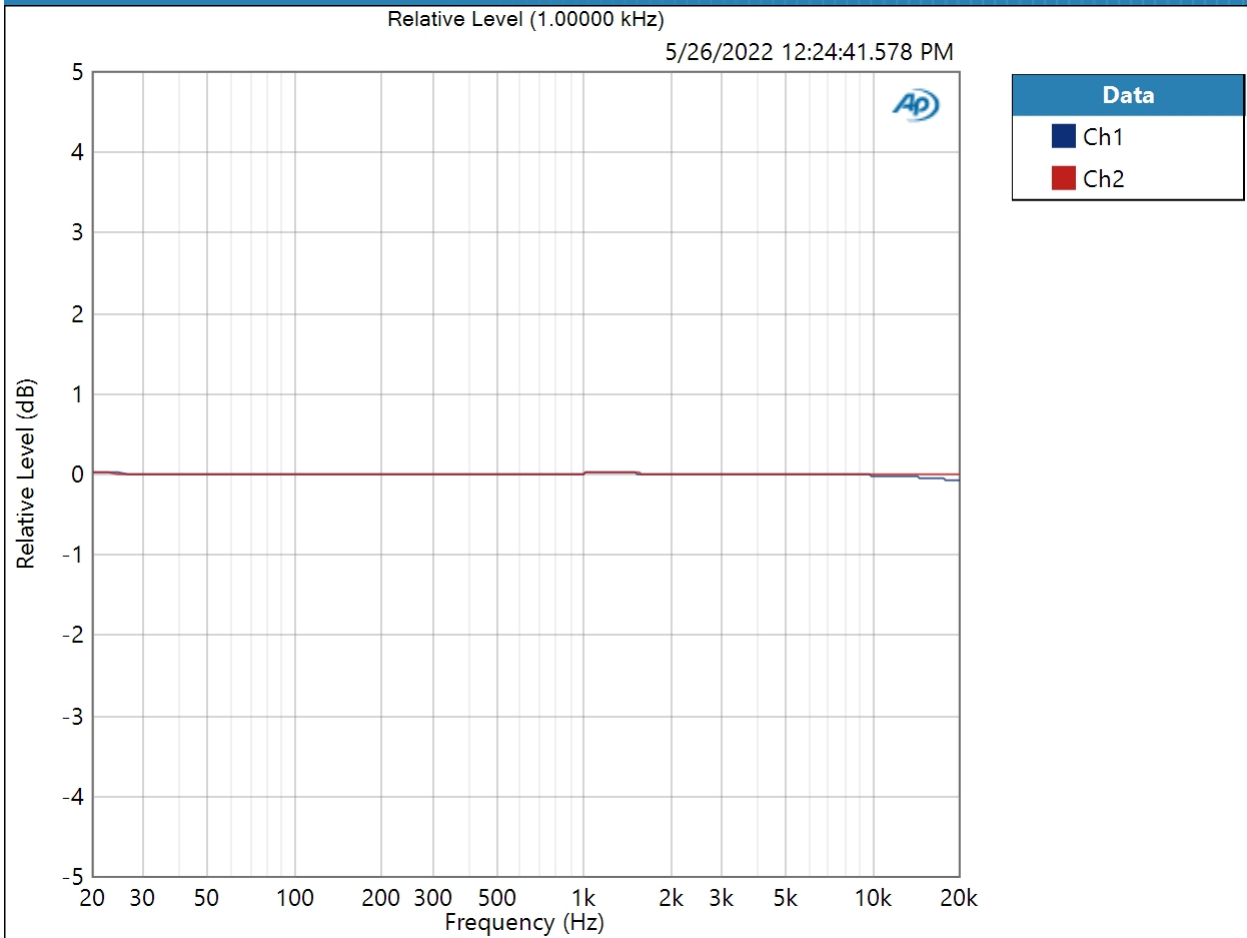

Relative Level (1.00000 kHz) Parameters

Mode: Normalized at Reference

Ref Frequency: 1.00000 kHz

Result: ✔ PASSED

Deviation (20.0000 Hz - 20.0000 kHz) (5/26/2022 12:24:41.578 PM)

Ch1 ± 0.059 dB

Ch2 ± 0.019 dB

Deviation (20.0000 Hz - 20.0000 kHz) Parameters

Min: 20.0000 Hz

Max: 20.0000 kHz

Balanced : Signal to Noise Ratio

Waveform: Sine
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
High-pass Filter: Elliptic
High-pass Frequency: 20 Hz
Low-pass Filter: Elliptic
Low-pass Frequency: 20 kHz
Weighting Filter: A-wt.

Signal to Noise Ratio (5/26/2022 12:24:43.675 PM)

Ch1 124.060 dB
Ch2 124.058 dB

Balanced : THD+N

Waveform: Sine
 Generator Level: -0.000 dBFS
 DC Offset: 0.000 D
 Frequency: 1.00000 kHz
 High-pass Filter: Elliptic
 High-pass Frequency: 20 Hz
 Low-pass Filter: Elliptic
 Low-pass Frequency: 20 kHz
 Weighting Filter: Signal Path
 Notch Tuning Mode: Measured Frequency

THD+N Ratio (5/26/2022 12:24:46.460 PM)

Ch1 0.000819 %
 Ch2 0.000790 %

THD Ratio (5/26/2022 12:24:46.460 PM)

Ch1 0.000648 %
 Ch2 0.000614 %

Noise Ratio (5/26/2022 12:24:46.460 PM)

Ch1 0.000499 %
 Ch2 0.000497 %

Distortion Product Ratio (5/26/2022 12:24:46.460 PM)

Channel	F	H2	H3	H4	H5	H6	H7	H8	H9	H10
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch1	-0.00	-109.55	-110.46	-127.39	-114.23	-121.36	-119.11	-129.74	-116.79	-130.16
Ch2	-0.00	-132.98	-108.63	-130.78	-112.62	-128.28	-120.53	-134.06	-113.10	-125.45


Distortion Product Ratio Parameters

Frequency Unit: Hz
 Ratio Unit: dB
 Channel: Ch1

Balanced : IMD Level Sweep (CCIF)

IMD Type: CCIF
Mean Frequency: 12.5000 kHz
Diff Frequency: 80.0000 Hz
IMD Split: False
Start Level: -60.000 dBFS
Stop Level: -0.000 dBFS
Step Type: Linear
Number of Points: 31
Step Size: +2.000 dBFS
Mode: d2
Measured 1 5/26/2022 12:25:07 PM

CCIF Ratio (5/26/2022 12:25:07.126 PM)

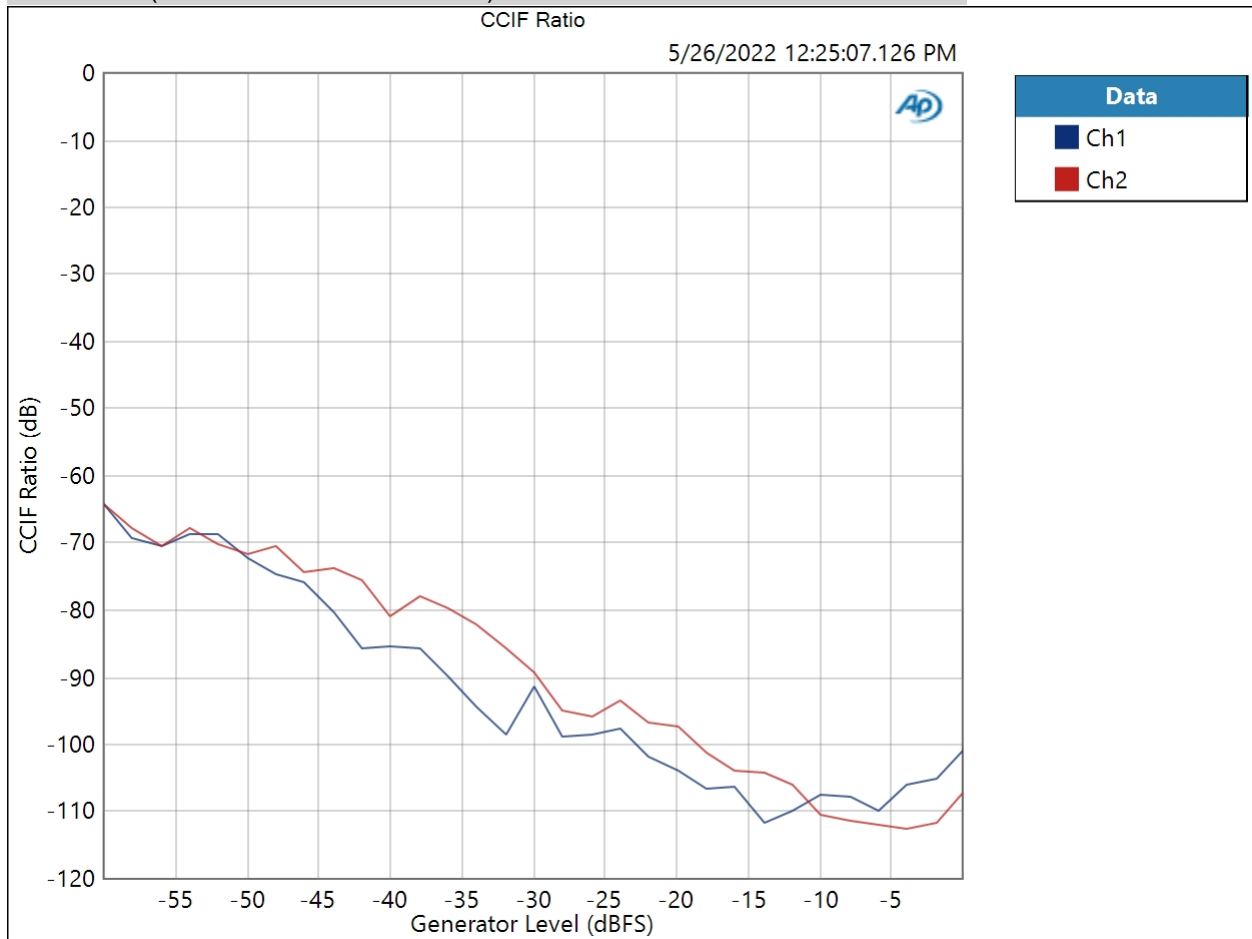


Result:  PASSED

Balanced : IMD Frequency Sweep (CCIF)

Generator Level: -6.000 dBFS
DC Offset: 0.000 D
Sweep Frequency: Mean Frequency
Diff Frequency: 80.0000 Hz
IMD Split: False
Start Frequency: 20.0000 kHz
Stop Frequency: 250.000 Hz
Step Type: Logarithmic
Number of Points: 31
Mode: d2
Measured 1 5/26/2022 12:25:15 PM

CCIF Ratio (5/26/2022 12:25:15.432 PM)

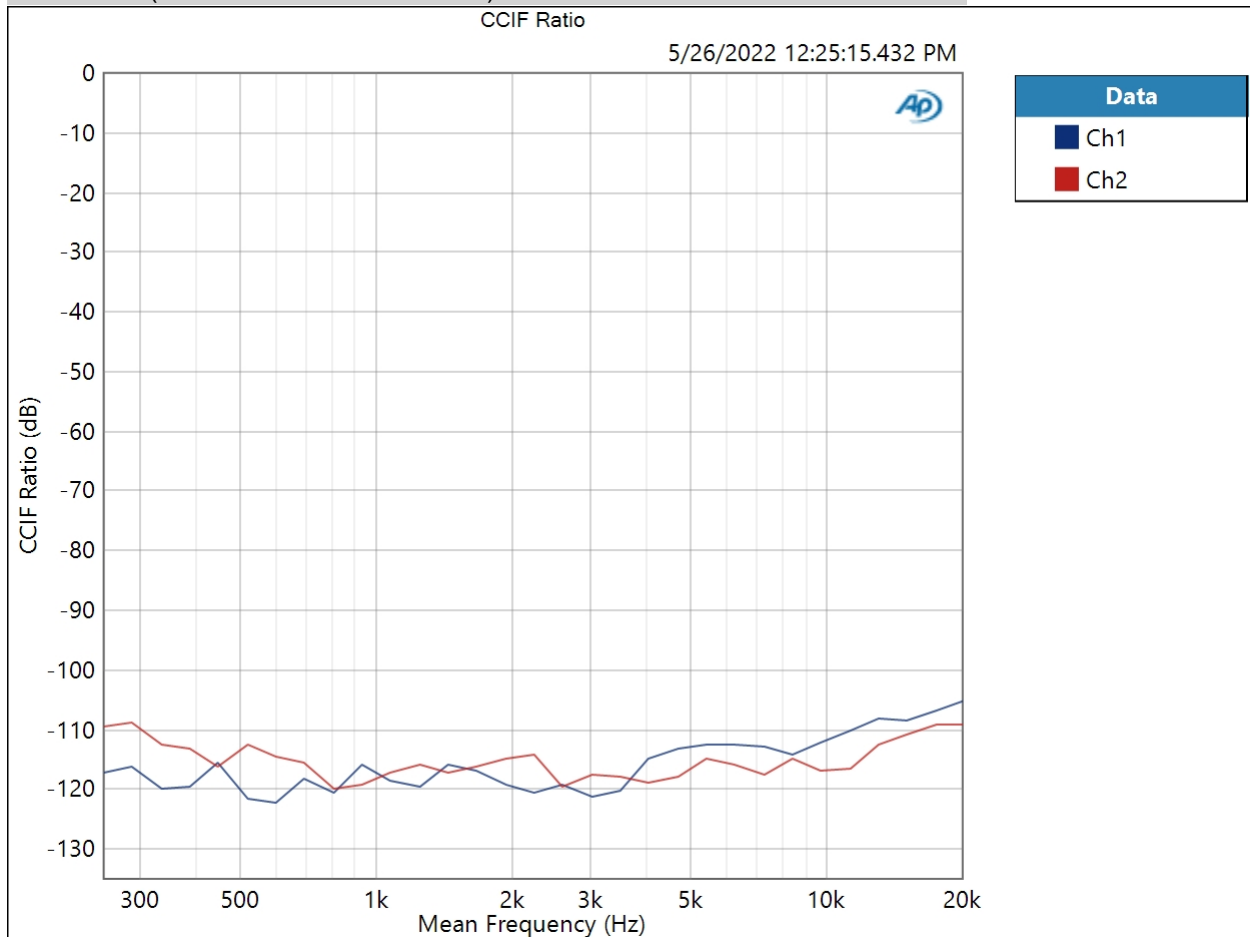

Result:  PASSED

Balanced : Crosstalk, One Channel Undriven

Waveform: Sine

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Frequency: 10.0000 kHz

Crosstalk (5/26/2022 12:25:20.560 PM)


Ch1 -134.892 dB

Ch2 -138.339 dB

Balanced : Bandpass Level Sweep

Waveform: Sine
Frequency: 1.00000 kHz
Start Level: -140.000 dBFS
Stop Level: -0.000 dBFS
Step Type: Linear
Number of Points: 71
Step Size: +2.000 dBFS
Offset: 0.000 D
Selectivity: Window width
Bandpass Tuning Mode: Generator Frequency
Measured 1 5/26/2022 12:26:39 PM

Linearity (-20.000 dBFS) (5/26/2022 12:26:39.363 PM)

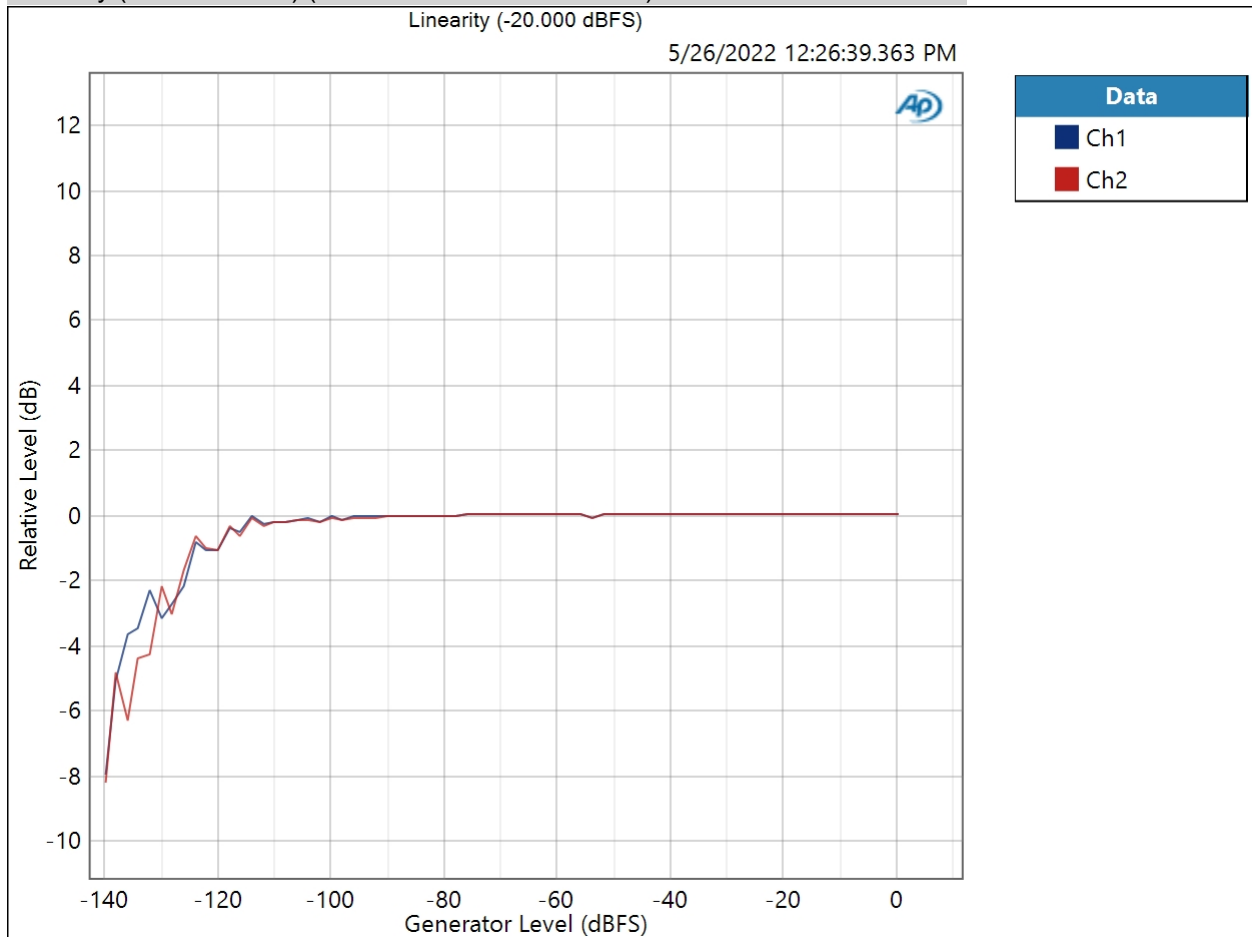

Linearity (-20.000 dBFS) Parameters

Mode: Normalized at Reference

Relative Level: -20.000 dBFS

Result:  PASSED

Single Ended : Signal Path Setup

Output Connector:	ASIO
Asio Device:	ASIO4ALL v2
Scaling Mode:	Digital
Output Sample Rate:	48.0000 kHz
Output Latency:	Auto
Buffer Size:	512
Clock Source:	Big Ben
Input 1:	Analog Unbalanced
Input Bandwidth:	AC (<10 Hz) - 20 kHz (44.1 kHz SR)
Input EQ:	None
Channels:	2
Termination:	100 kohm
High Performance Sine Analyzer:	Enabled
Input 2:	None
Device Delay:	0.000 s
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
Analog Input	
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal

Timebase Reference: Internal
Jitter: Disabled
• Triggers
Source: Off
Input Logic Level: 3.300 V
Edge: Rising

Single Ended : Level and Gain

Waveform: Sine
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Low-pass Filter: Signal Path

RMS Level (5/26/2022 12:28:44.946 PM)

Ch1 1.995 Vrms
Ch2 1.995 Vrms

Single Ended : DC Level

Waveform: Sine
Generator Level: $-\infty$ dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Delay Time: 100.0 ms
Acquisition Time: 333.0 ms


DC Level (5/26/2022 12:28:46.080 PM)

Ch1 -855.1 uV
Ch2 -133.7 uV

Single Ended : Signal Analyzer 0dB


Waveform: Sine
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 5/26/2022 12:28:50 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 32K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (5/26/2022 12:28:50.185 PM)

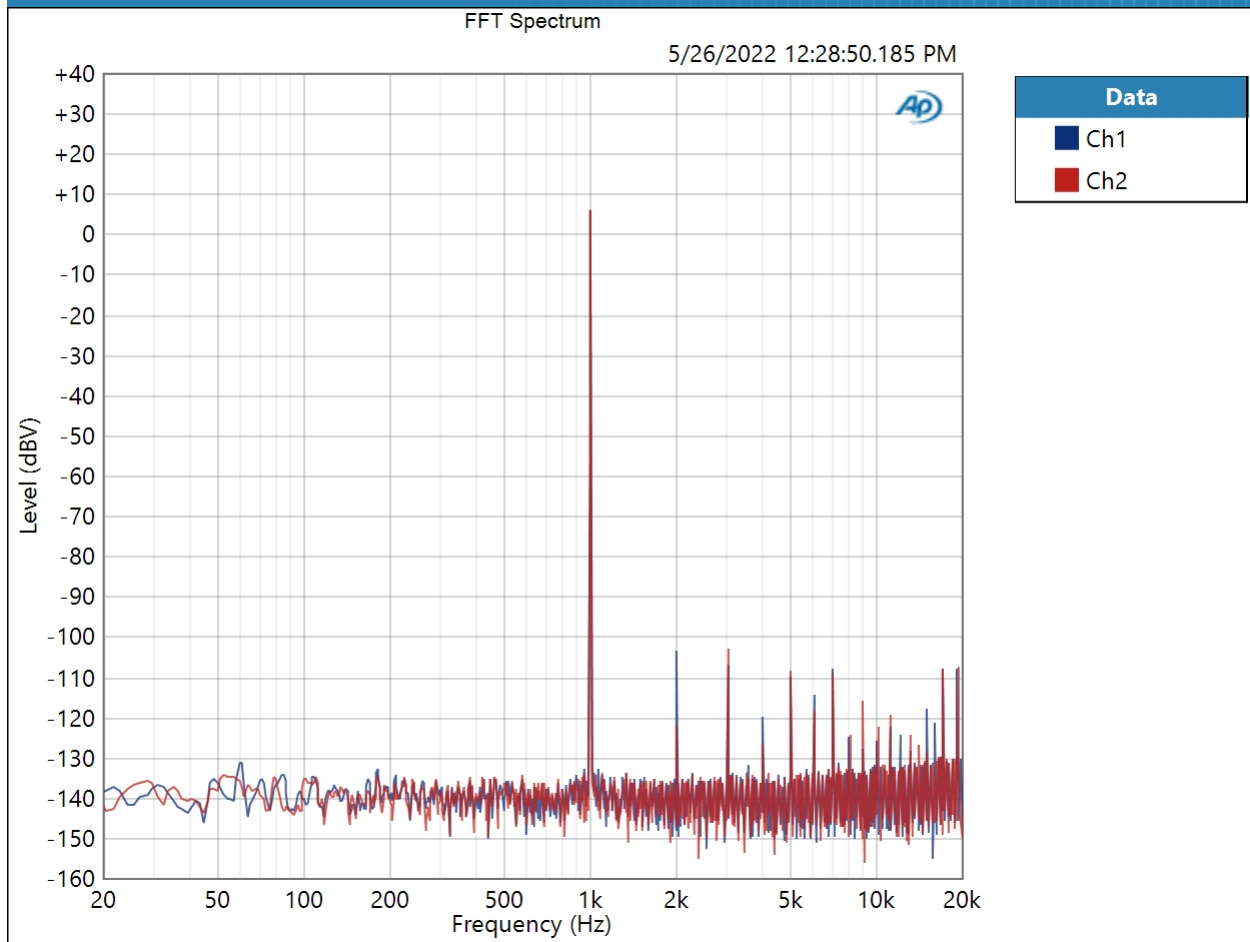

Result: PASSED

Single Ended : Signal Analyzer -20dB
Waveform: Sine
Generator Level: -20.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 5/26/2022 12:28:54 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 32K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)
FFT Spectrum (5/26/2022 12:28:54.144 PM)

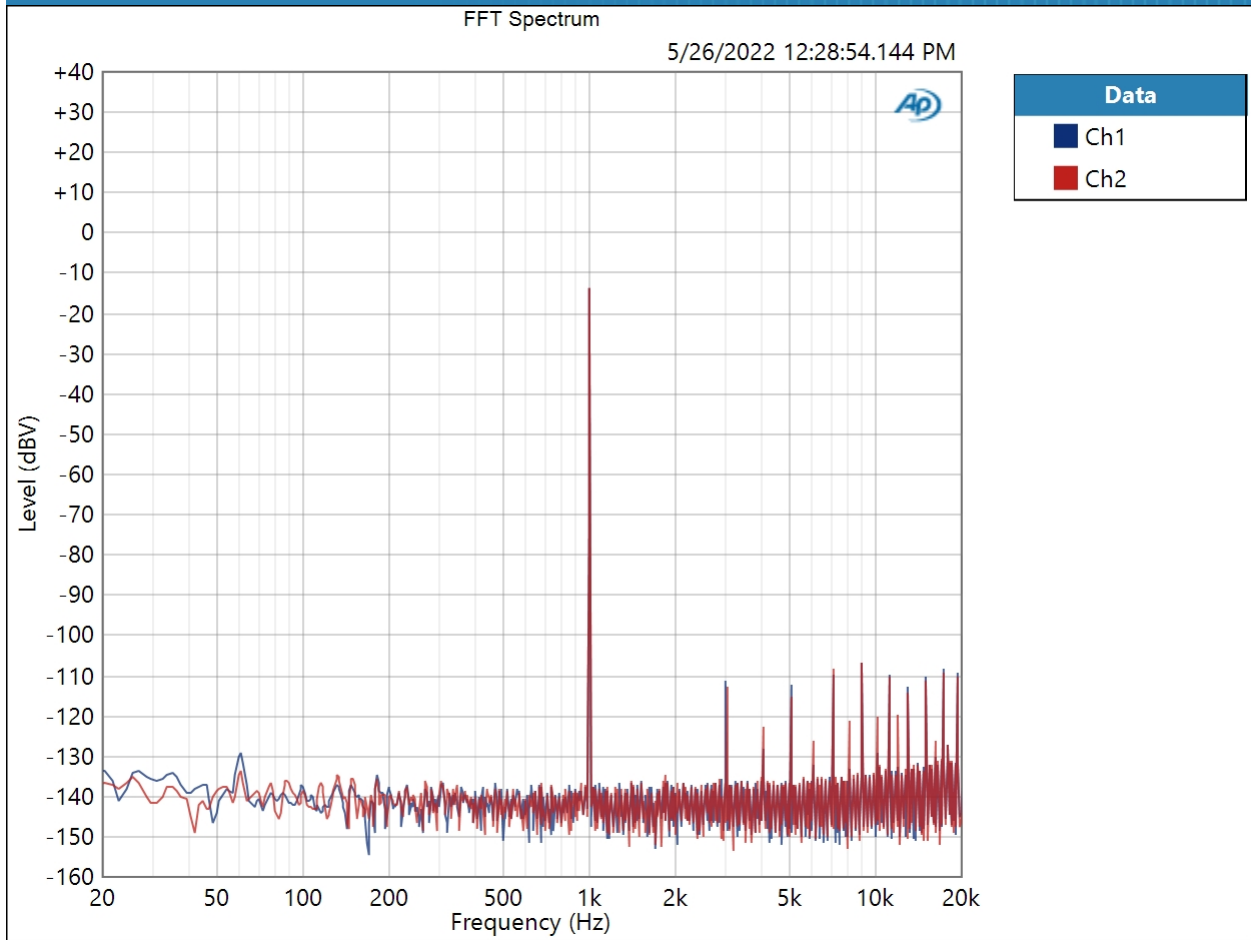


Result: PASSED

Single Ended : Signal Analyzer -60dB

Waveform: Sine
Generator Level: -60.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 5/26/2022 12:28:58 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 32K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (5/26/2022 12:28:58.172 PM)

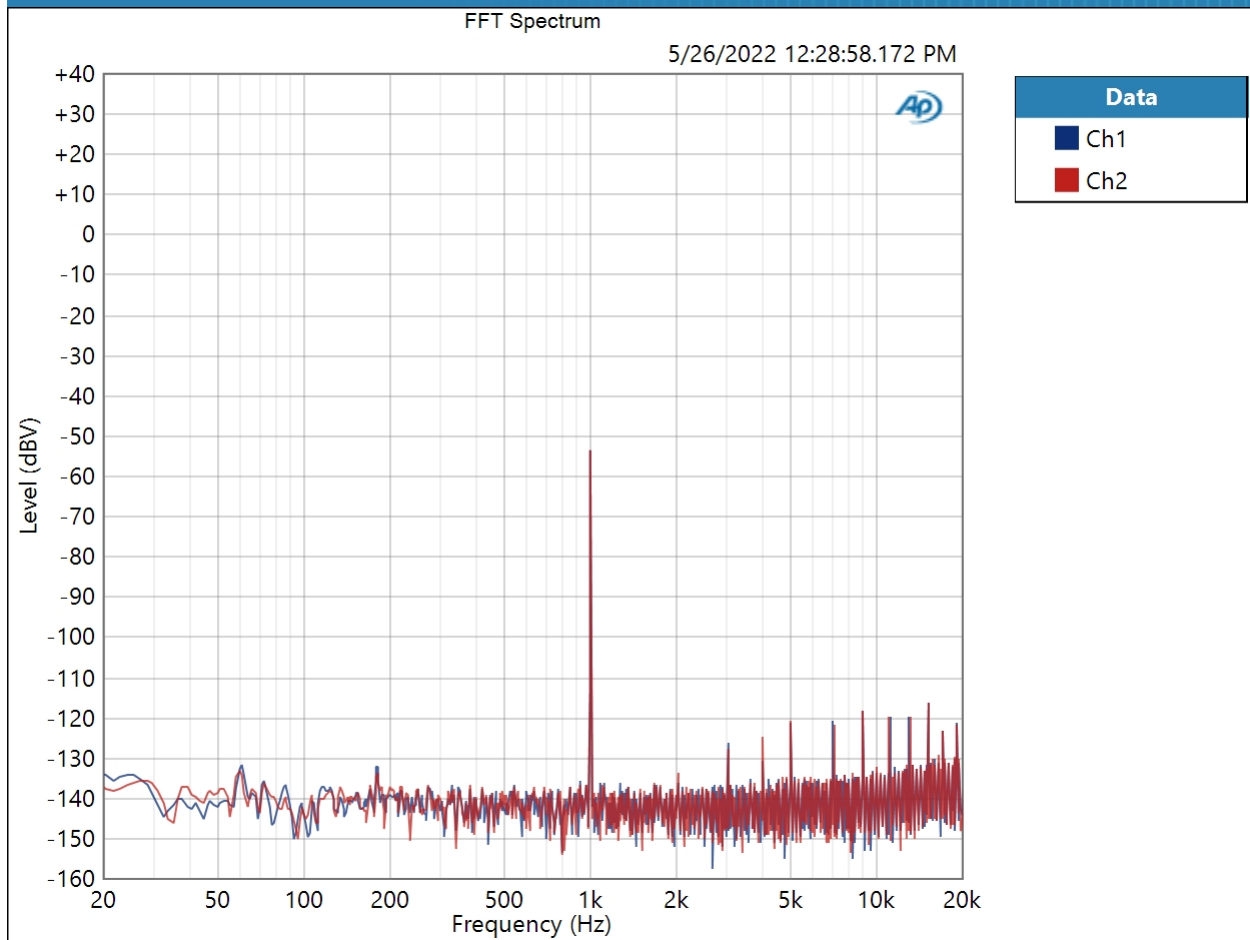


Result:  PASSED

Single Ended : Signal Analyzer -120dB

Waveform: Sine
Generator Level: -120.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 5/26/2022 12:29:18 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 256K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (5/26/2022 12:29:18.221 PM)

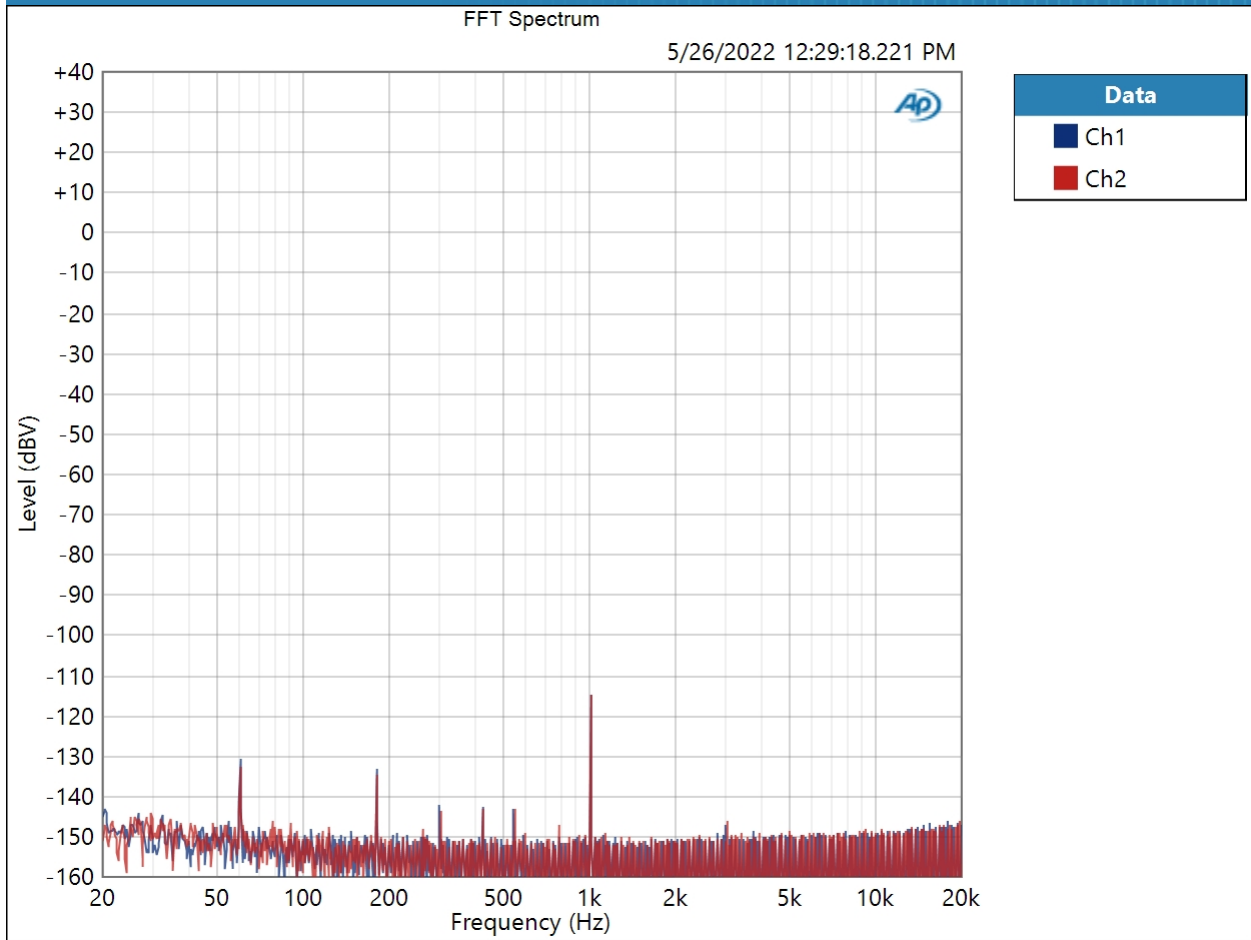


Result: PASSED

Single Ended : Signal Analyzer -144dB

Waveform: Sine
Generator Level: -144.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 5/26/2022 12:29:38 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 256K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (5/26/2022 12:29:38.424 PM)

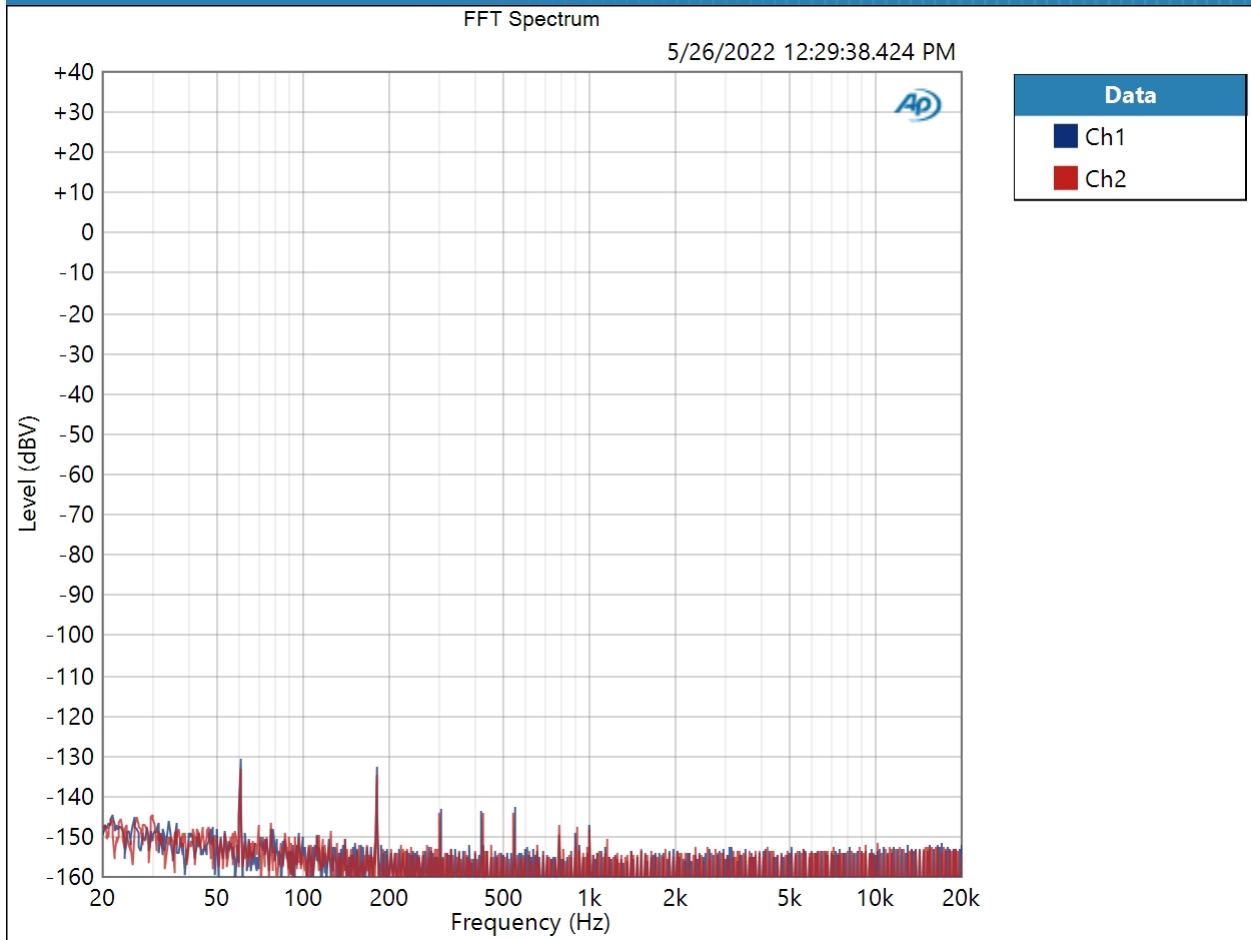


Result: PASSED

Single Ended : Frequency Response


Start Frequency: 20.0000 Hz
Stop Frequency: 20.0000 kHz
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
EQ: None
Pre-Sweep: 100.0 ms
Sweep: 350.0 ms
Extend Acquisition By: 500.0 ms
Secondary Source: None
Measured 1 5/26/2022 12:29:41 PM

RMS Level (5/26/2022 12:29:41.397 PM)

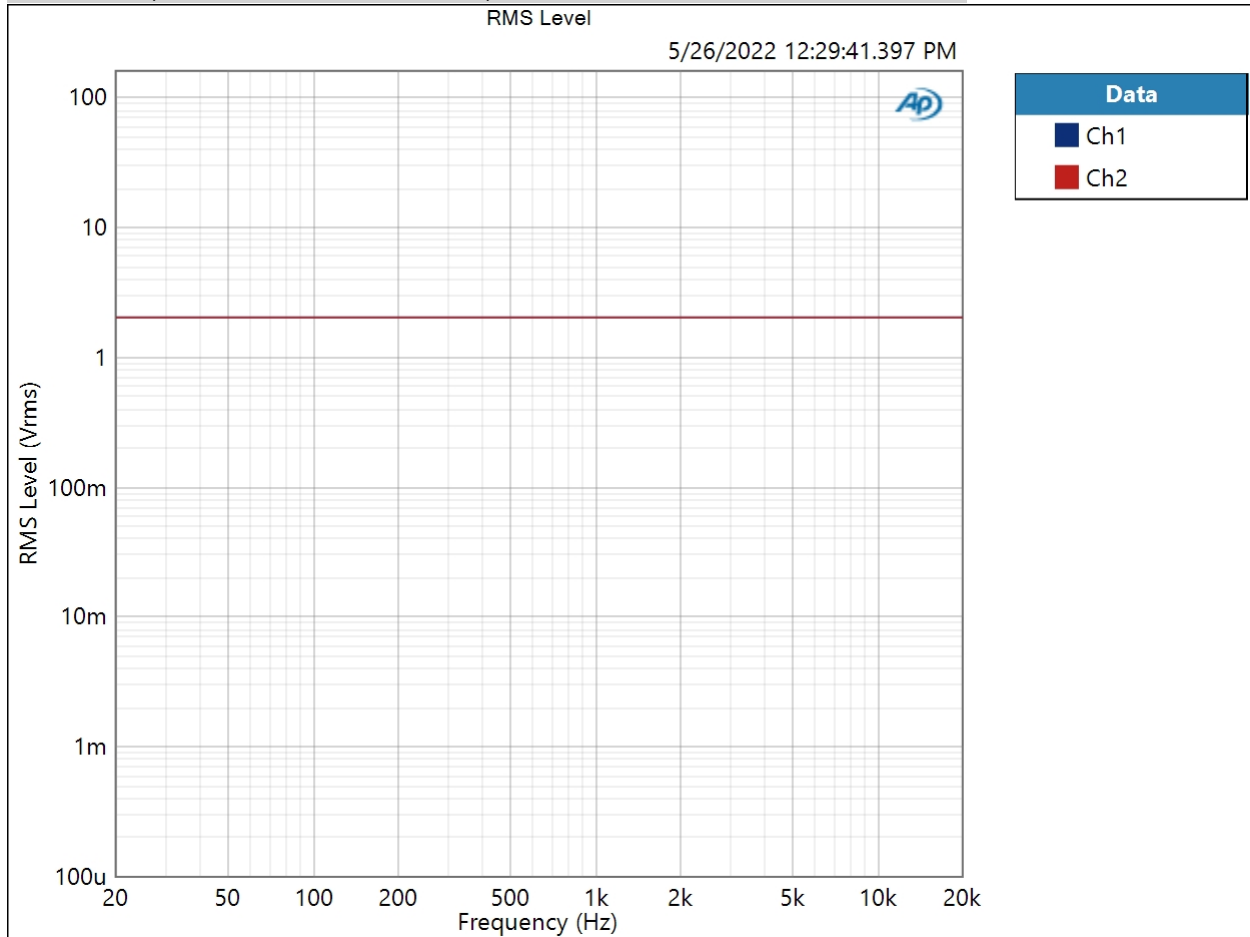

Result: PASSED

Relative Level (1.00000 kHz) (5/26/2022 12:29:41.397 PM)

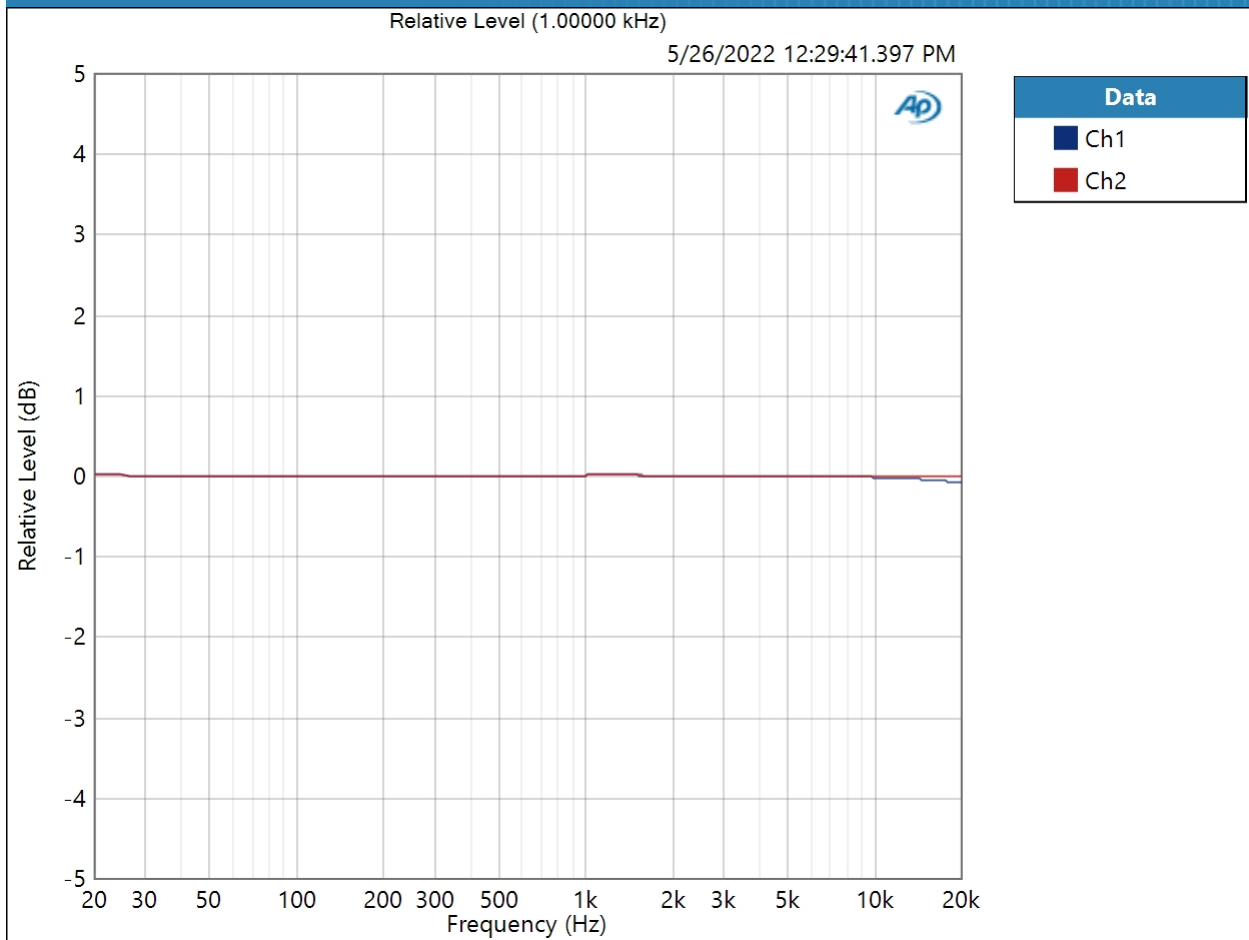

Relative Level (1.00000 kHz) Parameters

Mode: Normalized at Reference

Ref Frequency: 1.00000 kHz

Result: ✔ PASSED

Deviation (20.0000 Hz - 20.0000 kHz) (5/26/2022 12:29:41.397 PM)

Ch1 ± 0.059 dB

Ch2 ± 0.019 dB

Deviation (20.0000 Hz - 20.0000 kHz) Parameters

Min: 20.0000 Hz

Max: 20.0000 kHz

Single Ended : Signal to Noise Ratio

Waveform: Sine
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
High-pass Filter: Elliptic
High-pass Frequency: 20 Hz
Low-pass Filter: Elliptic
Low-pass Frequency: 20 kHz
Weighting Filter: A-wt.

Signal to Noise Ratio (5/26/2022 12:29:43.558 PM)

Ch1 120.930 dB
Ch2 120.835 dB

Single Ended : THD+N

Waveform: Sine
 Generator Level: -0.000 dBFS
 DC Offset: 0.000 D
 Frequency: 1.00000 kHz
 High-pass Filter: Elliptic
 High-pass Frequency: 20 Hz
 Low-pass Filter: Elliptic
 Low-pass Frequency: 20 kHz
 Weighting Filter: Signal Path
 Notch Tuning Mode: Measured Frequency

THD+N Ratio (5/26/2022 12:29:45.886 PM)

Ch1 0.000787 %

Ch2 0.000746 %

THD Ratio (5/26/2022 12:29:45.886 PM)

Ch1 0.000610 %

Ch2 0.000553 %

Noise Ratio (5/26/2022 12:29:45.886 PM)

Ch1 0.000494 %

Ch2 0.000496 %

Distortion Product Ratio (5/26/2022 12:29:45.886 PM)

Channel	F	H2	H3	H4	H5	H6	H7	H8	H9	H10
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch1	-0.00	-109.32	-111.70	-124.31	-114.98	-119.99	-116.50	-132.68	-117.39	-128.86
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch2	-0.00	-129.80	-109.91	-133.47	-112.93	-124.61	-116.90	-130.24	-114.39	-129.69

Distortion Product Ratio Parameters

Frequency Unit: Hz


Ratio Unit: dB

Channel: Ch1

Single Ended : IMD Level Sweep (CCIF)

IMD Type: CCIF
Mean Frequency: 12.5000 kHz
Diff Frequency: 80.0000 Hz
IMD Split: False
Start Level: -60.000 dBFS
Stop Level: -0.000 dBFS
Step Type: Linear
Number of Points: 31
Step Size: +2.000 dBFS
Mode: d2
Measured 1 5/26/2022 12:29:55 PM

CCIF Ratio (5/26/2022 12:29:55.047 PM)

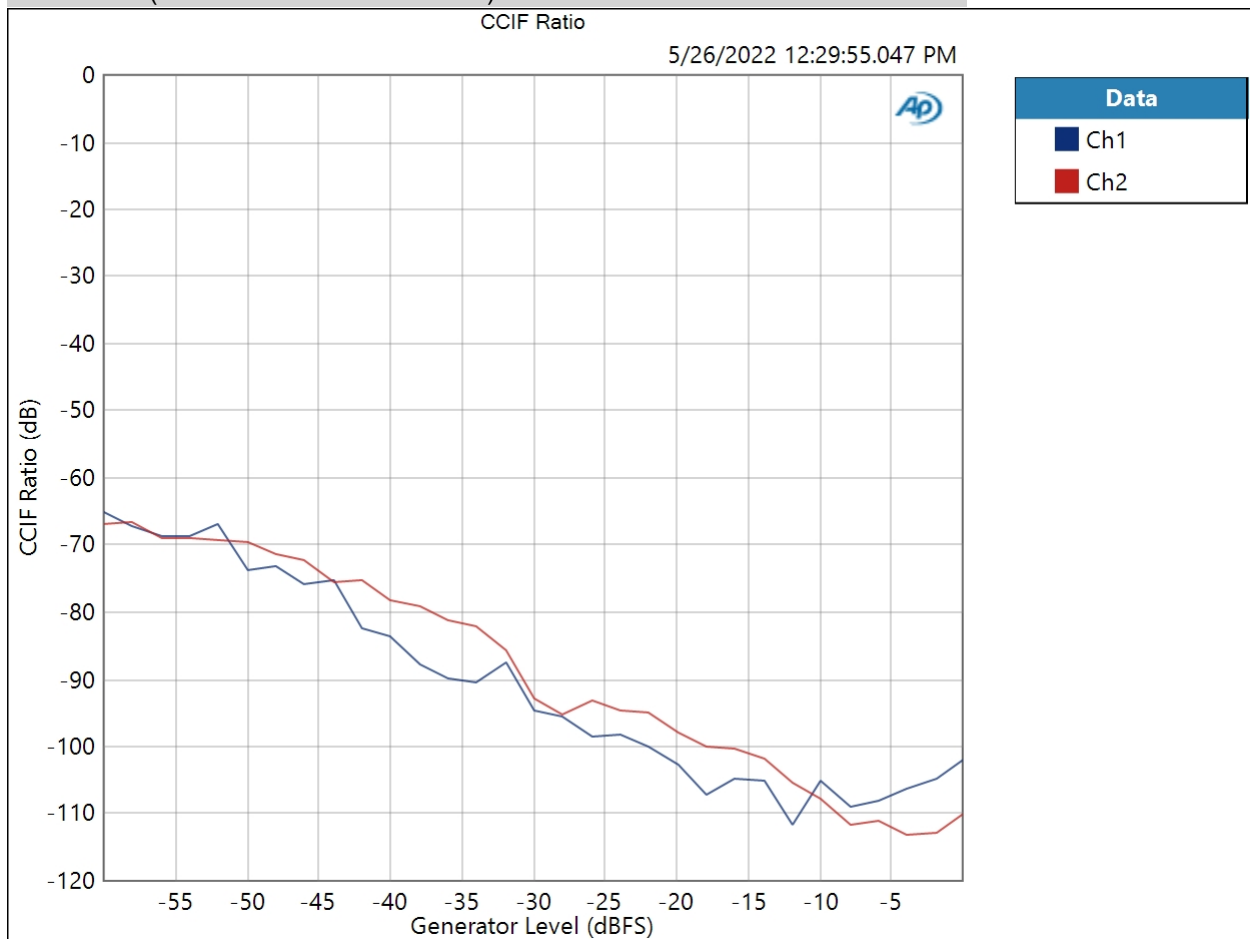


Result:  PASSED

Single Ended : IMD Frequency Sweep (CCIF)

Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Sweep Frequency: Mean Frequency
Diff Frequency: 80.0000 Hz
IMD Split: False
Start Frequency: 20.0000 kHz
Stop Frequency: 250.000 Hz
Step Type: Logarithmic
Number of Points: 31
Mode: d2
Measured 1 5/26/2022 12:30:03 PM

CCIF Ratio (5/26/2022 12:30:03.398 PM)

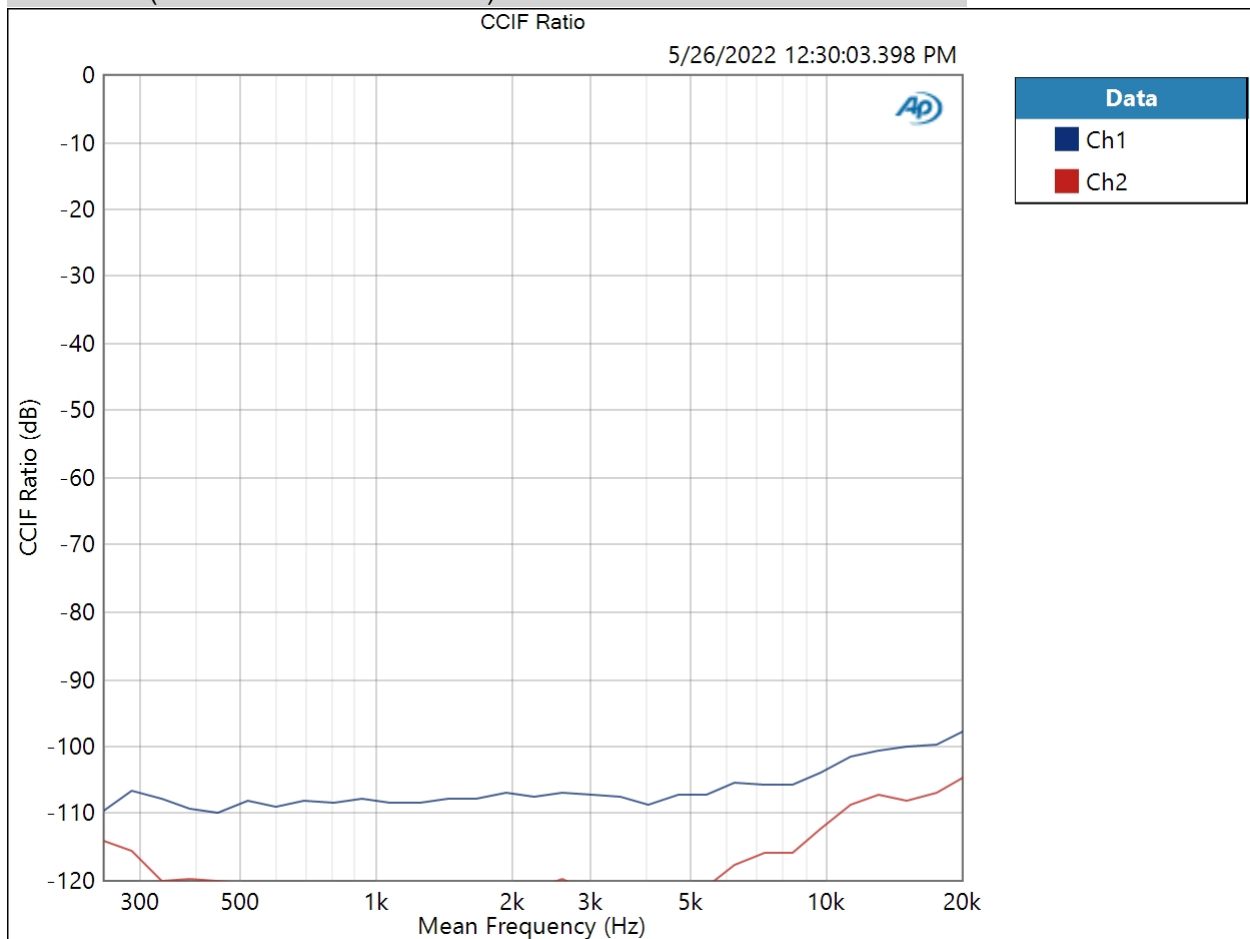

Result:  PASSED

Single Ended : Crosstalk, One Channel Undriven

Waveform: Sine

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Frequency: 10.0000 kHz

Crosstalk (5/26/2022 12:30:08.404 PM)


Ch1 -128.633 dB

Ch2 -129.108 dB

Single Ended : Bandpass Level Sweep

Waveform: Sine
Frequency: 1.00000 kHz
Start Level: -140.000 dBFS
Stop Level: -0.000 dBFS
Step Type: Linear
Number of Points: 71
Step Size: +2.000 dBFS
Offset: 0.000 D
Selectivity: Window width
Bandpass Tuning Mode: Generator Frequency
Measured 1 5/26/2022 12:31:27 PM

Linearity (-20.000 dBFS) (5/26/2022 12:31:27.544 PM)

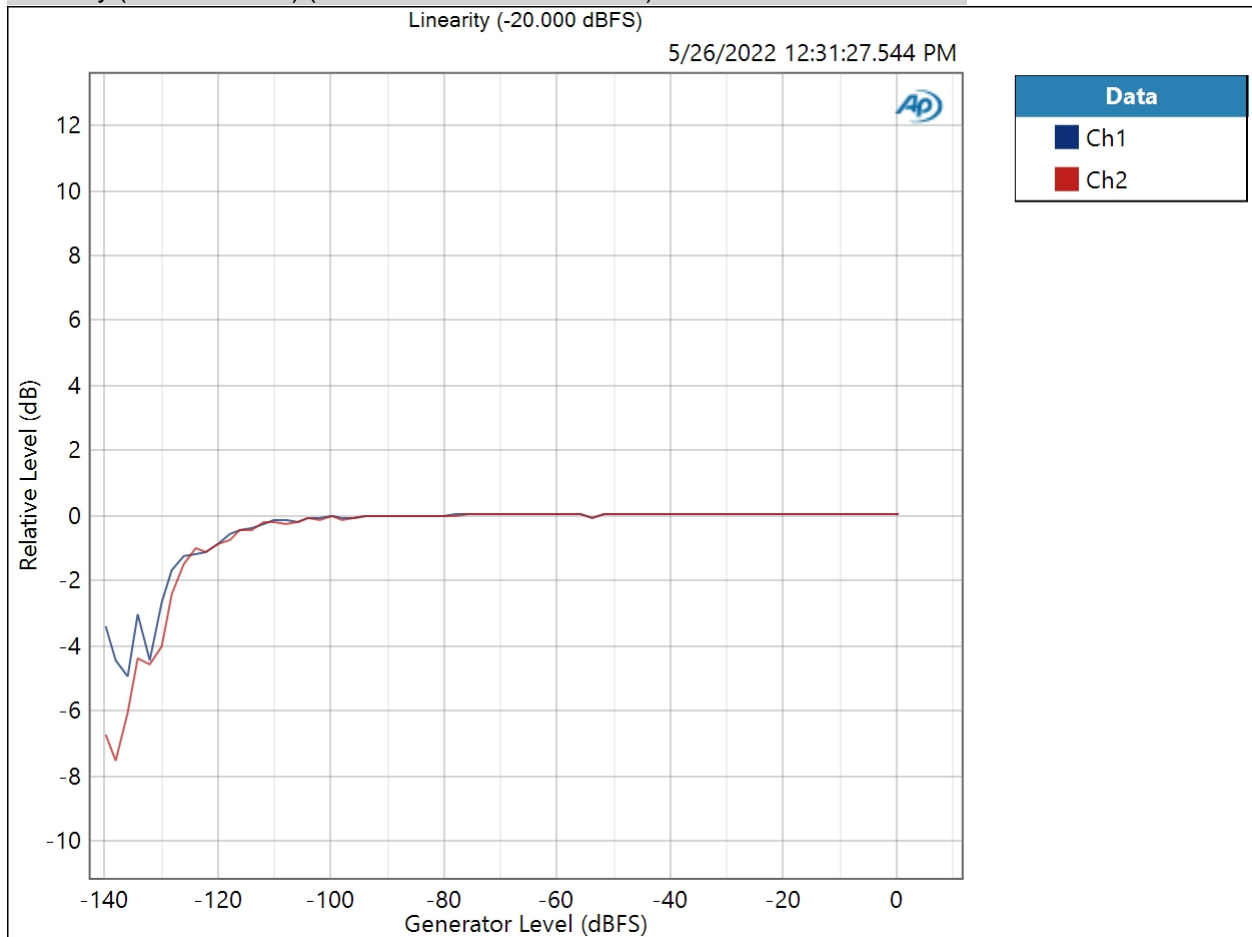

Linearity (-20.000 dBFS) Parameters

Mode: Normalized at Reference

Relative Level: -20.000 dBFS

Result:  PASSED

Jitter : Signal Path Setup

Output Connector:	Digital Optical
Output Sample Rate:	44.1000 kHz
Output Bit Depth:	24
Dither:	Enabled
Output Mode:	Consumer
Status Bits:	Auto (Consumer)
Auto Range:	Enabled
Output EQ:	None
Input 1:	Analog Balanced
Input Bandwidth:	AC (<10 Hz) - 20 kHz (44.1 kHz SR)
Input EQ:	None
Channels:	2
Termination:	200 kohm
High Performance Sine Analyzer:	Enabled
Input 2:	None
Device Delay:	0.000 s
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
Analog Input	
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V

5/26/2022 12:32 PM

Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising

Jitter : Jitter Level Sweep


• Audio Generator

Waveform: Sine
Generator Level: -20.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz

• Jitter Generator


Jitter Waveform: Sine
Start Level: 5.000 ps
Stop Level: 50.00 ns
Step Type: Logarithmic
Number of Points: 31
Jitter Frequency: 1.00000 kHz
High-pass Filter: Signal Path
Low-pass Filter: Signal Path
Weighting Filter: A-wt.
Notch Tuning Mode: Generator Frequency
Secondary Source: None
Measured 1 5/26/2022 12:32:26 PM

THD+N Level (5/26/2022 12:32:26.322 PM)

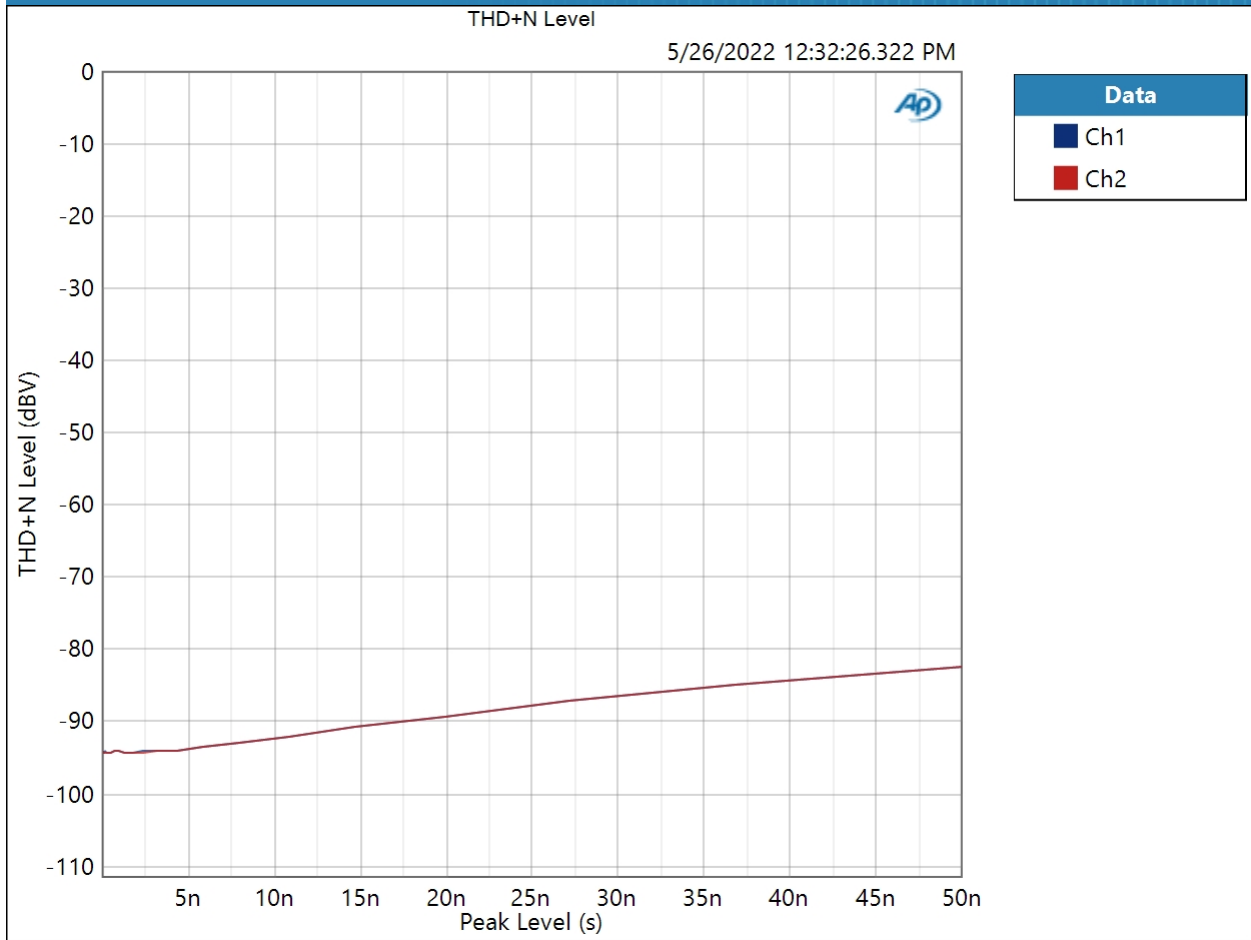

Result: PASSED

Distortion Product Level (H2) (5/26/2022 12:32:26.322 PM)

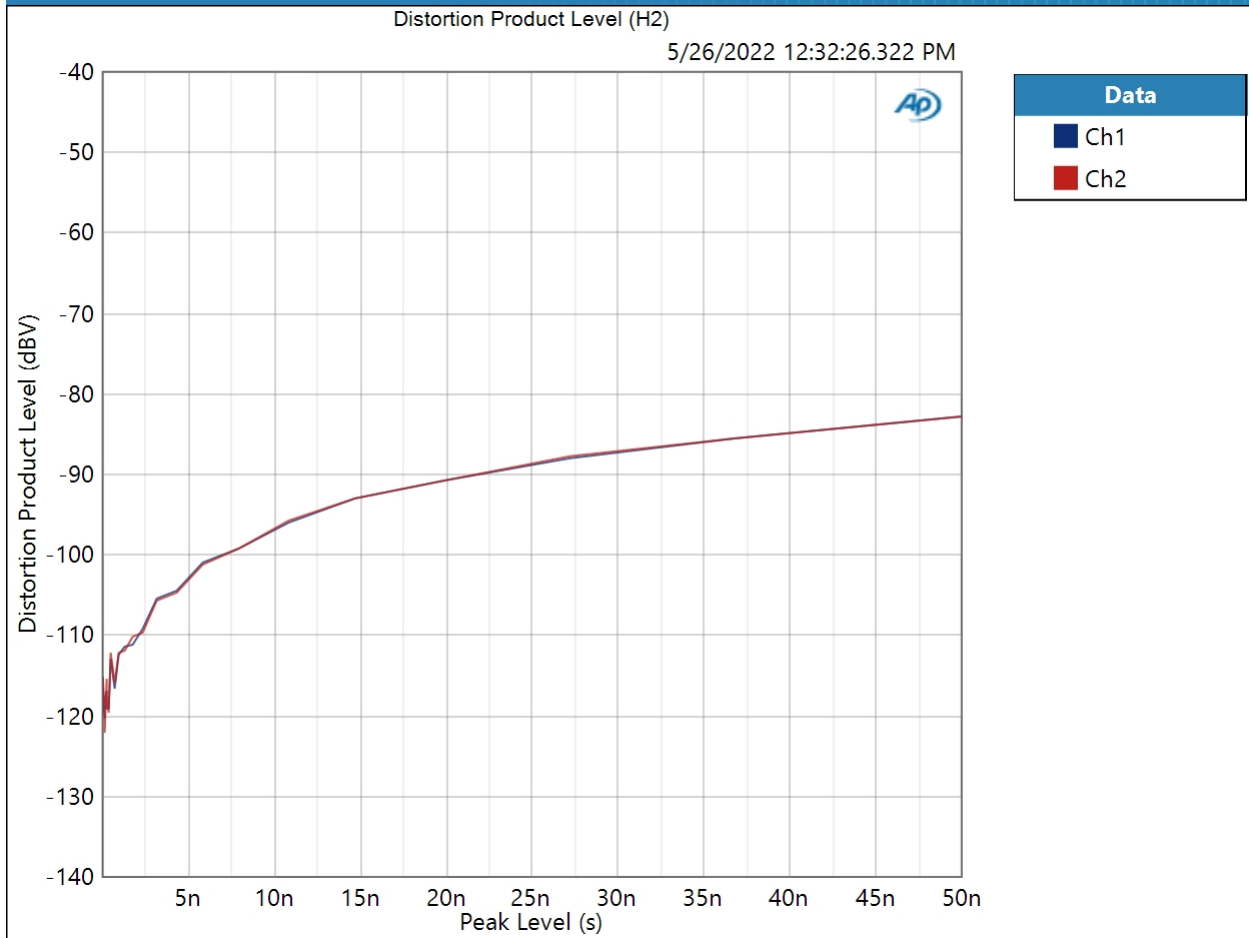

Distortion Product Level (H2) Parameters

Harmonics: Single Harmonic

Harmonic Number: 2

Result: PASSED