

Schiit DAC APx555 Standard Test Suite: Yggdrasil Analog 2/Gen 5



Notes:

If you have difficulties reproducing these results, check your analyzer set-up and ancillary equipment carefully, ensure your analyzer has had a recent calibration, and contact the analyzer manufacturer for help if necessary. If you still have significantly different results, please contact info@schiiit.com with a copy of your results so we can bring back your product and check it against our standard.

APx Instrument

Instrument ID:	11571
Calibration Date:	5/8/2018
APx Version:	5.0.0.105.133644

Balanced : Signal Path Setup

Output Connector:	ASIO
Output Sample Rate:	48.0000 kHz
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	2
Termination:	200 kohm
High Performance Sine Analyzer:	Enabled
Input Bandwidth:	AC (<10 Hz) - 22.4k (48 kHz SR)
Device Delay:	0.000 s
Input EQ:	None
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V

Edge: Rising

Balanced : Level and Gain

Waveform: Sine
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz

RMS Level (10/8/2019 1:39:53.155 PM)

Ch1 4.233 Vrms
Ch2 4.237 Vrms

Balanced : DC Level

Waveform: Sine
Generator Level: $-\infty$ dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Delay Time: 100.0 ms
Acquisition Time: 333.0 ms


DC Level (10/8/2019 1:39:54.199 PM)

Ch1 30.48 μ V
Ch2 653.9 μ V

Balanced : Signal Analyzer 0dB

Waveform: Sine
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 10/8/2019 1:39:57 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 32K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:39:57.814 PM)

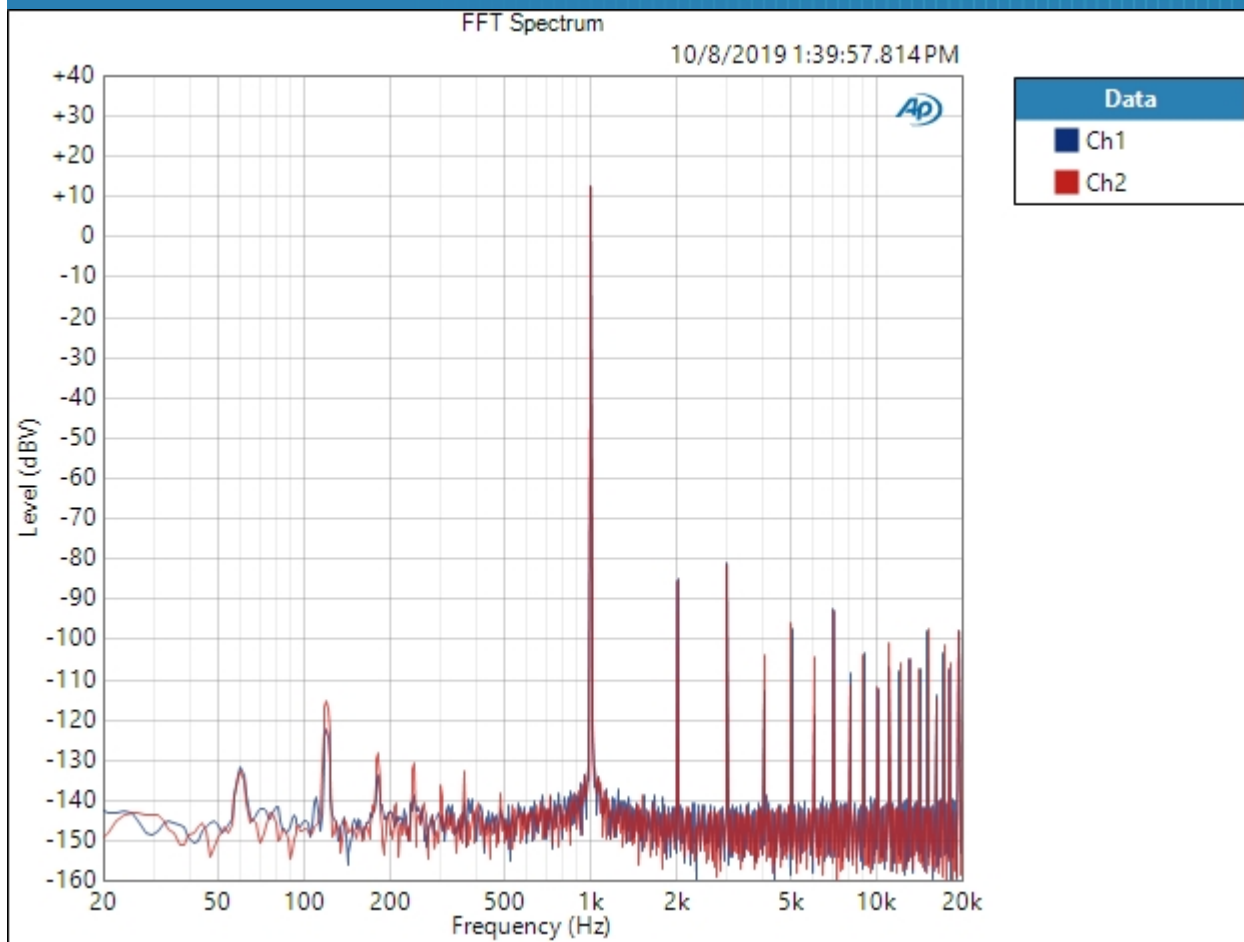


Result:  PASSED

Balanced : Signal Analyzer -20dB

Waveform: Sine
Generator Level: -20.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 10/8/2019 1:40:01 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 32K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:40:01.413 PM)

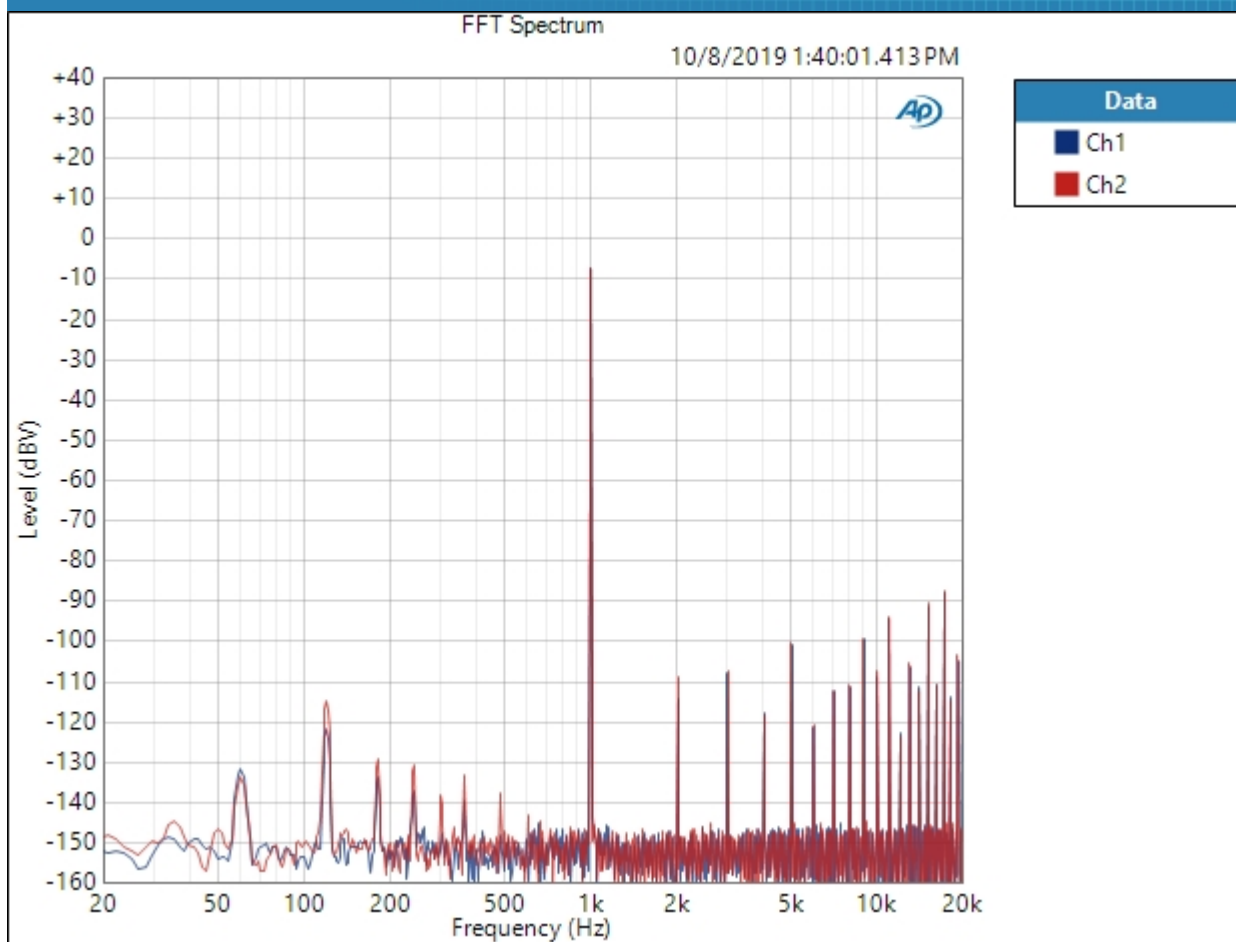


Result:  PASSED

Balanced : Signal Analyzer -60dB

Waveform: Sine
Generator Level: -60.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 10/8/2019 1:40:04 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 32K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:40:04.985 PM)

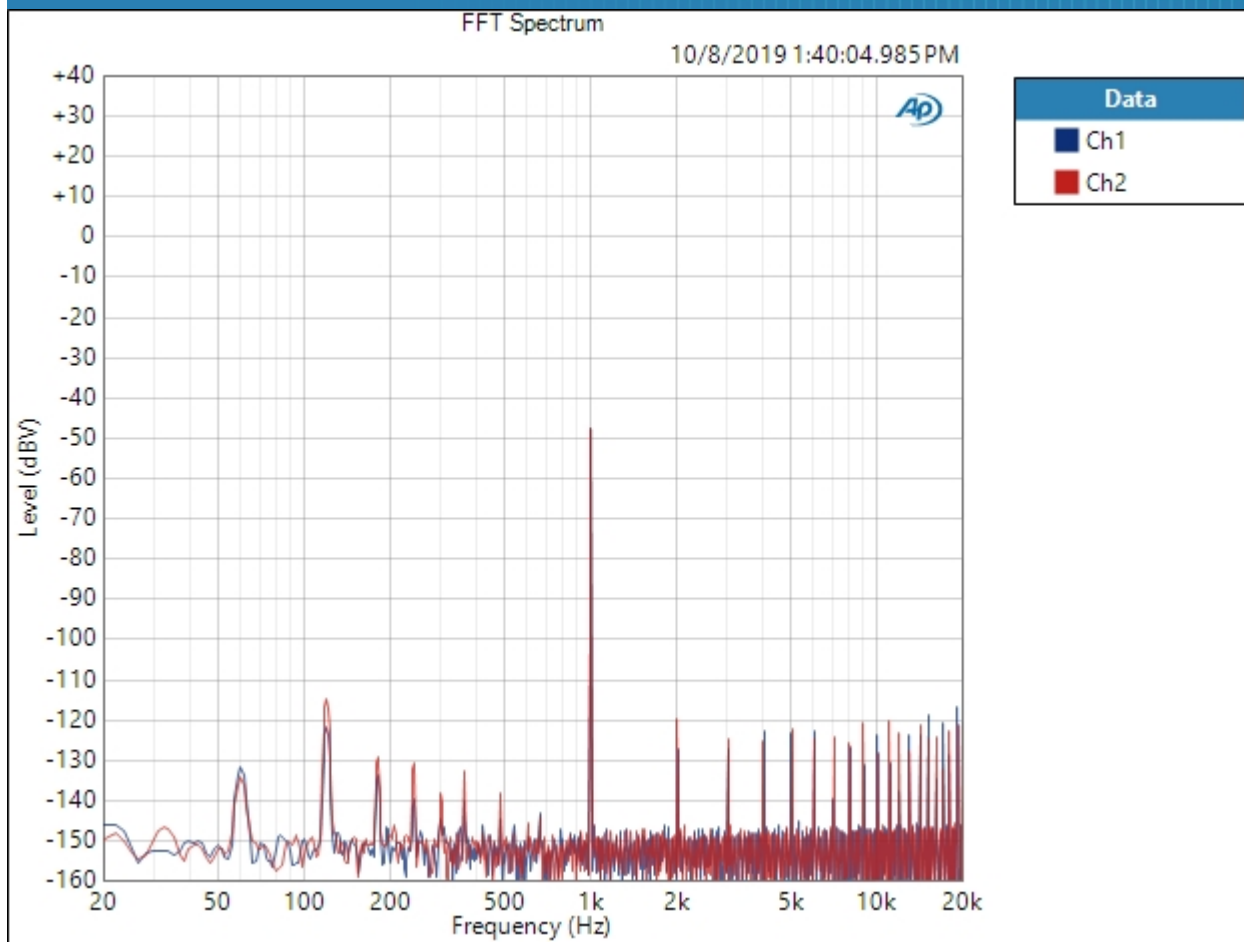


Result:  PASSED

Balanced : Signal Analyzer -120dB

Waveform: Sine
Generator Level: -120.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 10/8/2019 1:40:23 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 256K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:40:23.252 PM)

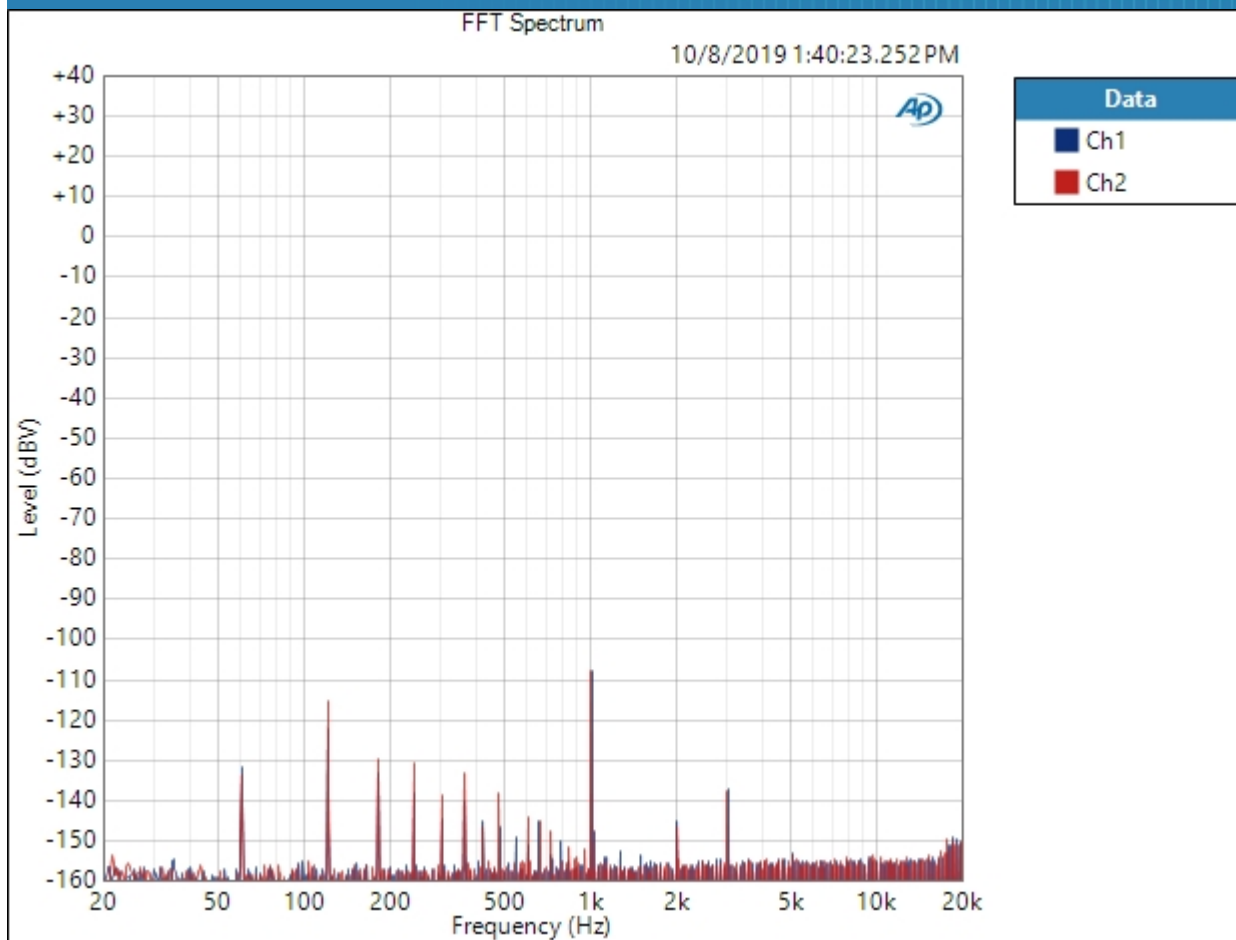


Result: PASSED

Balanced : Signal Analyzer -144dB

Waveform: Sine
Generator Level: -144.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 10/8/2019 1:40:41 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 256K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:40:41.589 PM)

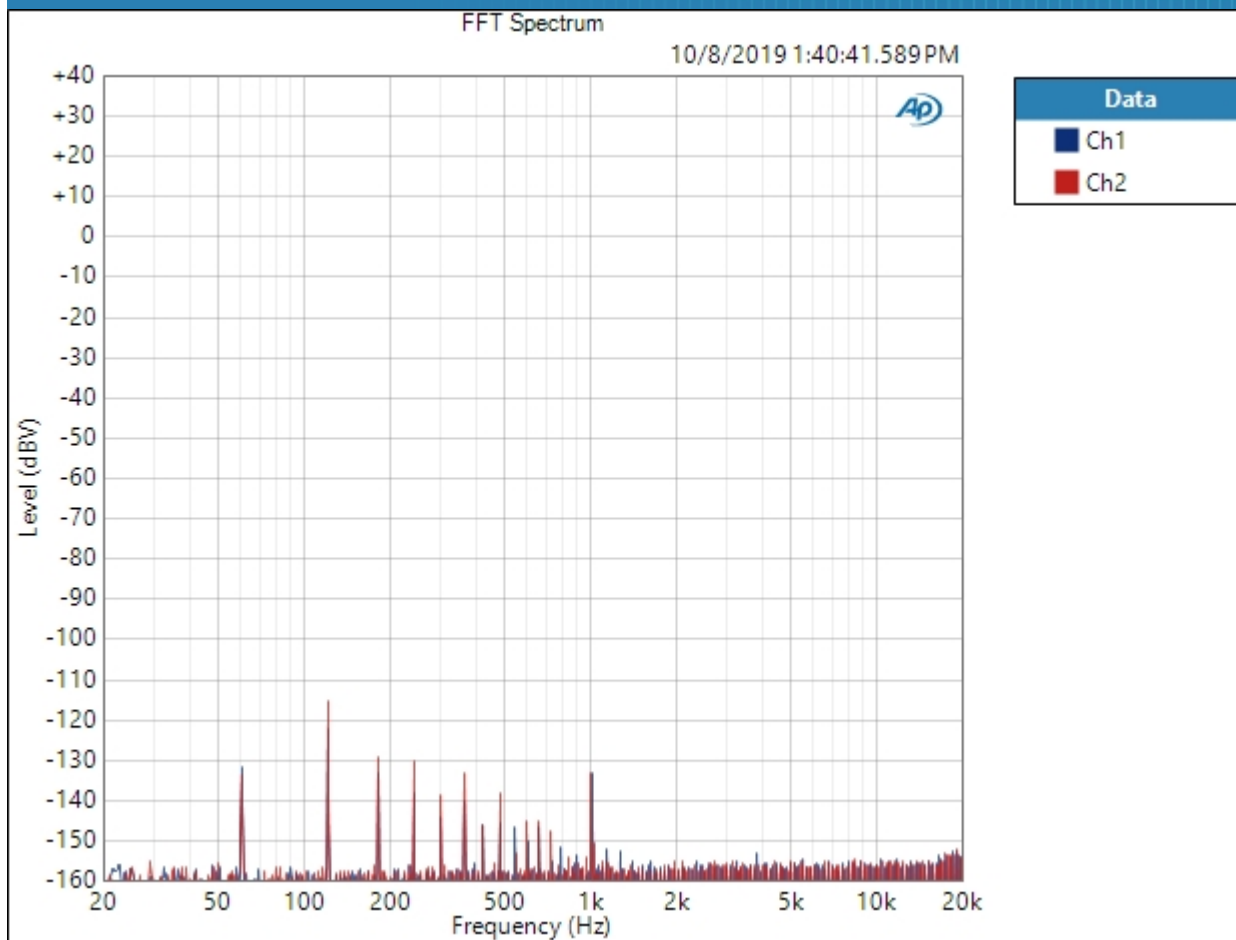


Result: PASSED

Balanced : Frequency Response

Start Frequency: 20.0000 Hz
Stop Frequency: 20.0000 kHz
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
EQ: None
Pre-Sweep: 100.0 ms
Sweep: 350.0 ms
Extend Acquisition By: 500.0 ms
Secondary Source: None
Measured 1 10/8/2019 1:40:44 PM


RMS Level (10/8/2019 1:40:44.442 PM)

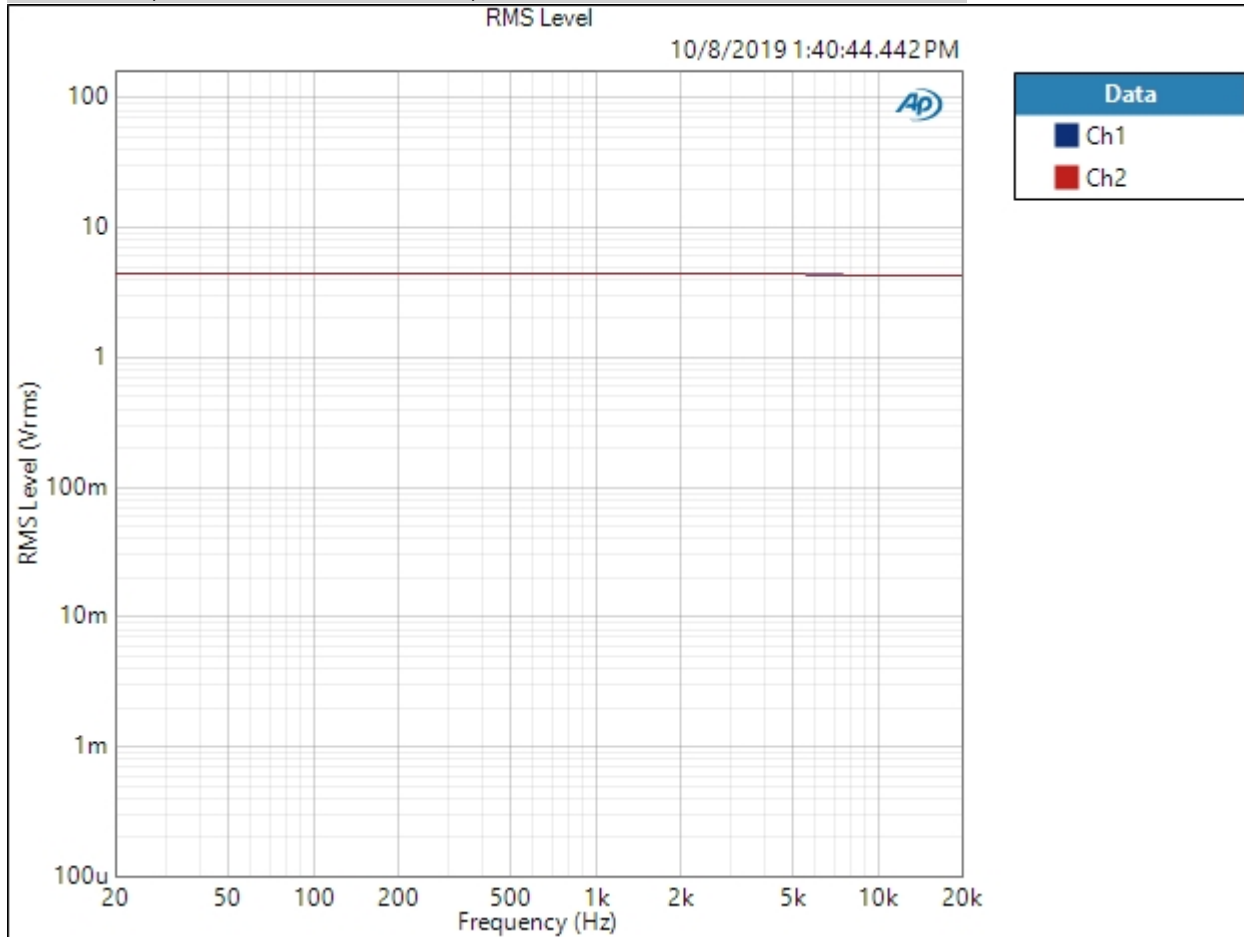

Result: PASSED

Relative Level (1.00000 kHz) (10/8/2019 1:40:44.442 PM)

10/8/2019 1:49 PM

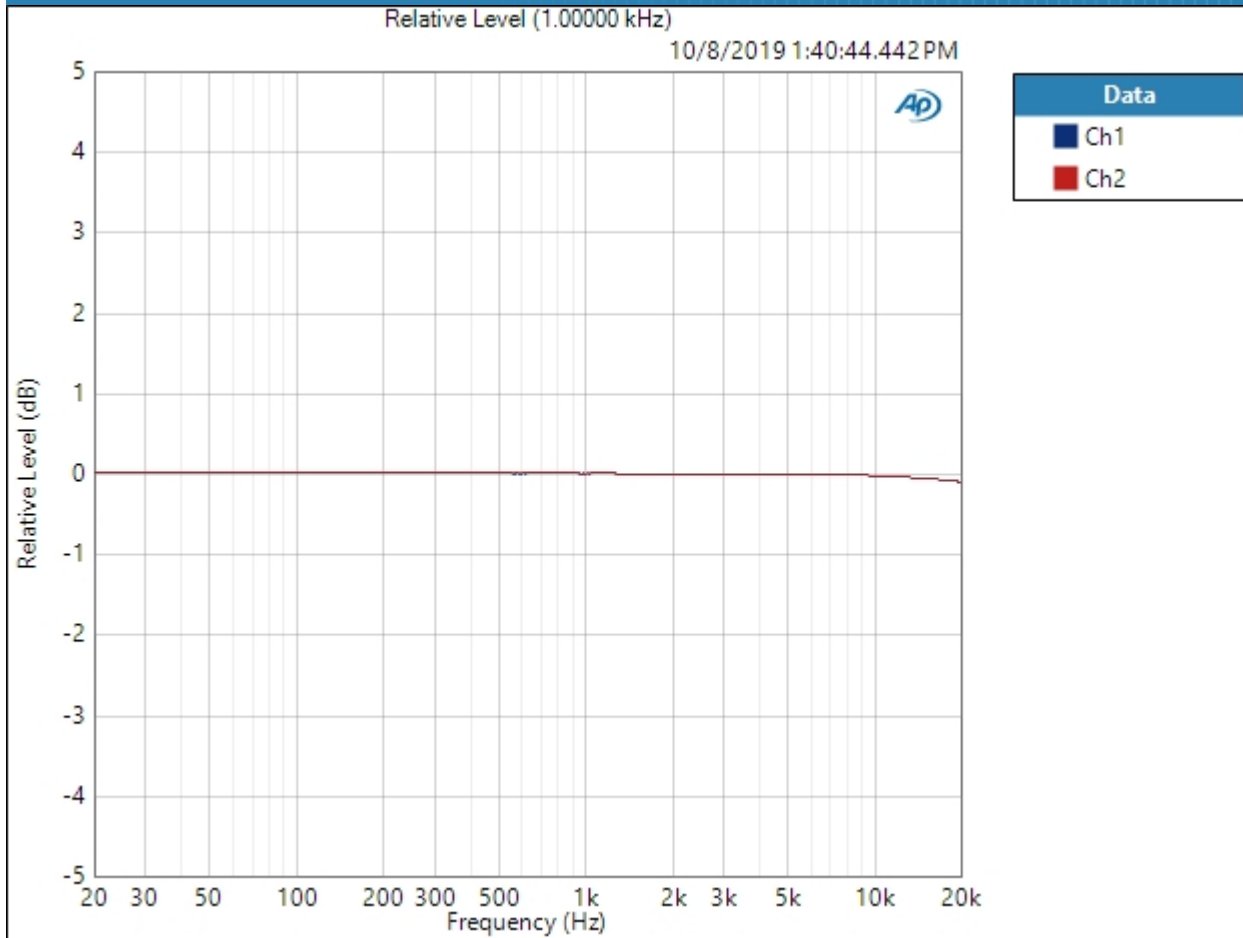

Relative Level (1.00000 kHz) Parameters

Mode: Normalized at Reference

Ref Frequency: 1.00000 kHz

Result: ✔ PASSED

Deviation (20.0000 Hz - 20.0000 kHz) (10/8/2019 1:40:44.442 PM)

Ch1 ± 0.062 dB

Ch2 ± 0.062 dB

Deviation (20.0000 Hz - 20.0000 kHz) Parameters

Min: 20.0000 Hz

Max: 20.0000 kHz

Balanced : Signal to Noise Ratio

Waveform: Sine

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Frequency: 1.00000 kHz

Low-pass Filter: 20 kHz

Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Signal to Noise Ratio (10/8/2019 1:40:46.308 PM)

Ch1 126.710 dB

Ch2 124.433 dB

Balanced : THD+N

Waveform: Sine
 Generator Level: -0.000 dBFS
 DC Offset: 0.000 D
 Frequency: 1.00000 kHz
 Low-pass Filter: 20 kHz
 Weighting Filter: Signal Path
 High-pass Filter: 20 Hz
 Notch Tuning Mode: Measured Frequency

THD+N Ratio (10/8/2019 1:40:48.652 PM)

Ch1 0.002588 %
 Ch2 0.002539 %

THD Ratio (10/8/2019 1:40:48.652 PM)

Ch1 0.002580 %
 Ch2 0.002524 %

Noise Ratio (10/8/2019 1:40:48.652 PM)

Ch1 0.000087 %
 Ch2 0.000086 %

Distortion Product Ratio (10/8/2019 1:40:48.652 PM)

Channel	F	H2	H3	H4	H5	H6	H7	H8	H9	H10
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch1	-0.00	-97.37	-93.93	-123.74	-109.77	-123.46	-104.04	-124.56	-113.49	-119.37
Ch2	-0.00	-97.86	-94.06	-115.21	-108.76	-116.88	-104.61	-122.60	-115.03	-123.26

Distortion Product Ratio Parameters

Frequency Unit: Hz
 Ratio Unit: dB

Balanced : IMD Level Sweep (CCIF)
IMD Type: CCIF
Waveform: IMD
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Mean Frequency: 12.5000 kHz
Diff Frequency: 80.0000 Hz
IMD Split: False
Start Level: -60.000 dBFS
Stop Level: -0.000 dBFS
Step Type: Linear
Number of Points: 31
Step Size: +2.000 dBFS
Mode: d2
Measured 1 10/8/2019 1:41:01 PM

CCIF Ratio (10/8/2019 1:41:01.341 PM)




Result: PASSED

Balanced : IMD Frequency Sweep (CCIF)

Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Sweep Frequency: Mean Frequency
Mean Frequency: 12.5000 kHz
Diff Frequency: 80.0000 Hz
IMD Split: False
Start Frequency: 20.0000 kHz
Stop Frequency: 250.000 Hz
Step Type: Logarithmic
Number of Points: 31
Mode: d2+d3
Measured 1 10/8/2019 1:41:10 PM

CCIF Ratio (10/8/2019 1:41:10.121 PM)

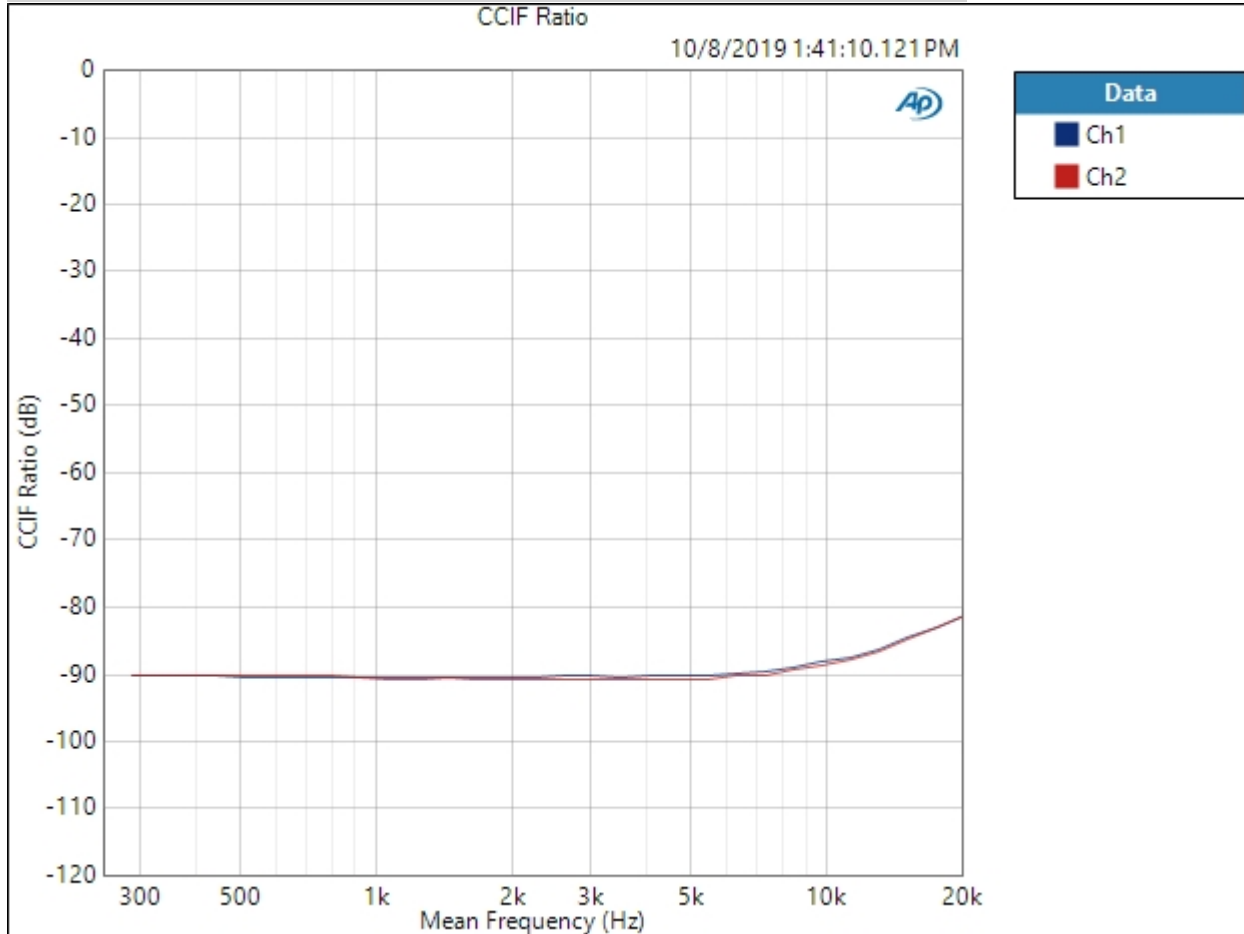

Result:  PASSED

Balanced : Crosstalk, One Channel Undriven

Waveform: Sine

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Frequency: 10.0000 kHz

Crosstalk (10/8/2019 1:41:13.414 PM)

Ch1 -146.764 dB

Ch2 -121.495 dB

Balanced : Crosstalk Sweep, One Channel Driven

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Start Frequency: 20.0000 kHz


Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15

Measured 1 10/8/2019 1:42:04 PM

Crosstalk (10/8/2019 1:42:04.300 PM)

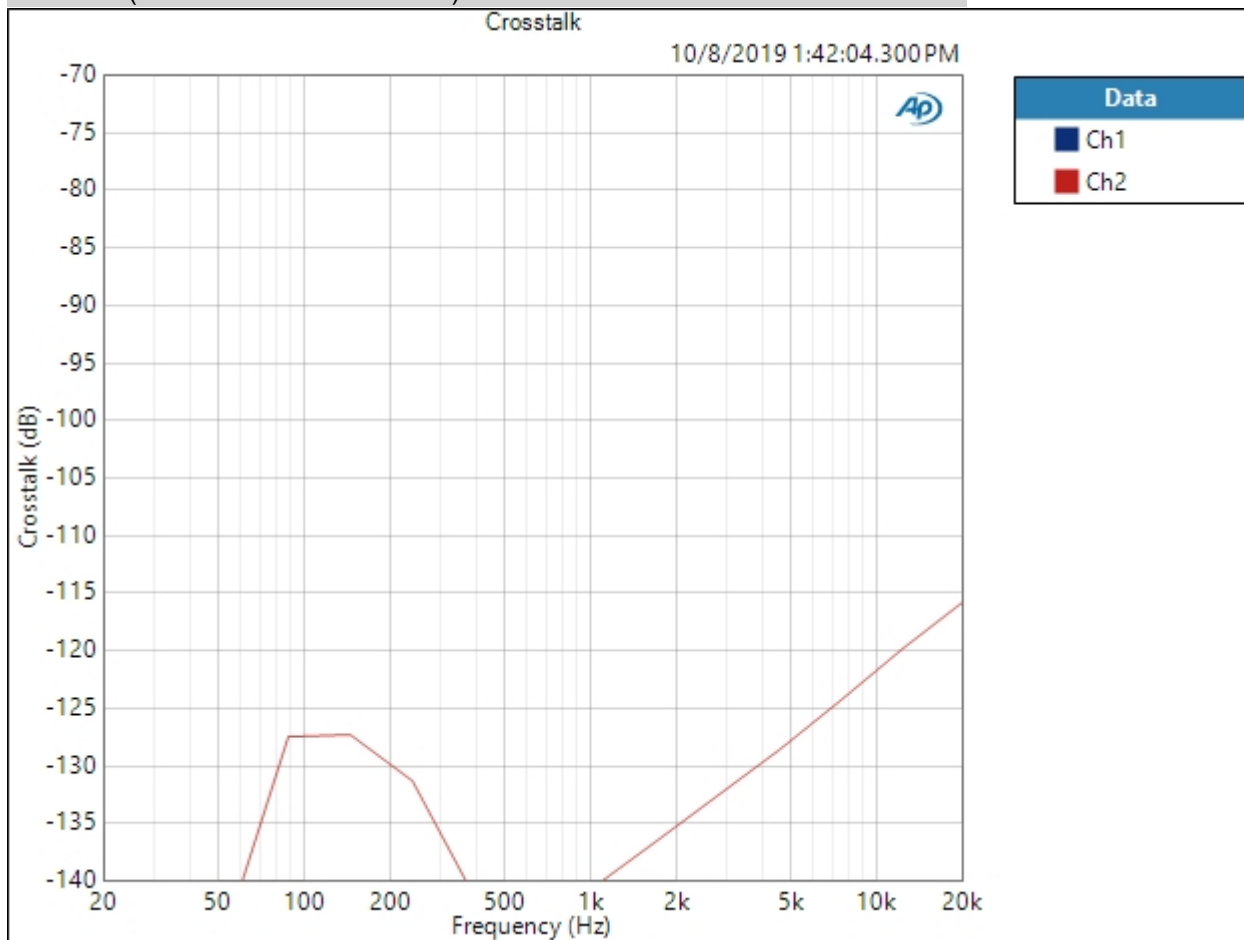


Crosstalk Parameters

Source: Ch1

Result: PASSED

Balanced : Bandpass Level Sweep

Waveform: Sine
Generator Level: -20.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Start Level: -140.000 dBFS
Stop Level: -0.000 dBFS
Step Type: Linear
Number of Points: 71
Step Size: +2.000 dBFS
Offset: 0.000 D
Selectivity: Window width
Bandpass Tuning Mode: Generator Frequency
Measured 1 10/8/2019 1:44:19 PM
Linearity (-20.000 dBFS) (10/8/2019 1:44:19.691 PM)

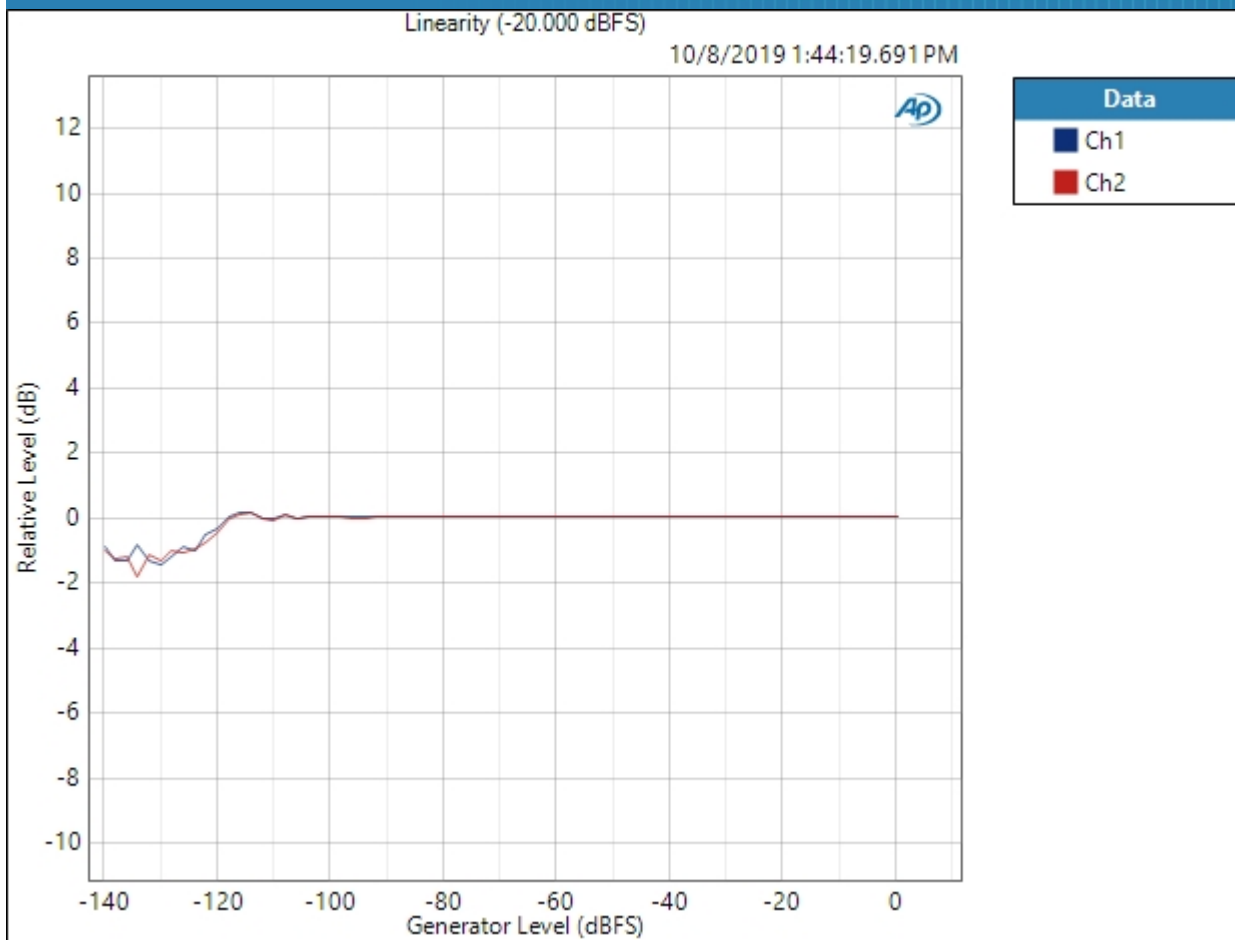

Linearity (-20.000 dBFS) Parameters

Mode: Normalized at Reference

Relative Level: -20.000 dBFS

Result: PASSED

Single Ended : Signal Path Setup

Output Connector:	ASIO
Output Sample Rate:	48.0000 kHz
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
High Performance Sine Analyzer:	Enabled
Input Bandwidth:	AC (<10 Hz) - 22.4k (48 kHz SR)
Device Delay:	0.000 s
Input EQ:	None
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V

Edge: Rising

Single Ended : Level and Gain

Waveform: Sine
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz

RMS Level (10/8/2019 1:44:27.337 PM)

Ch1 2.063 Vrms
Ch2 2.063 Vrms

Single Ended : DC Level

Waveform: Sine
Generator Level: $-\infty$ dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Delay Time: 100.0 ms
Acquisition Time: 333.0 ms


DC Level (10/8/2019 1:44:28.381 PM)

Ch1 -96.96 μ V
Ch2 109.7 μ V

Single Ended : Signal Analyzer 0dB

Waveform: Sine
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 10/8/2019 1:44:31 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 32K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:44:31.990 PM)

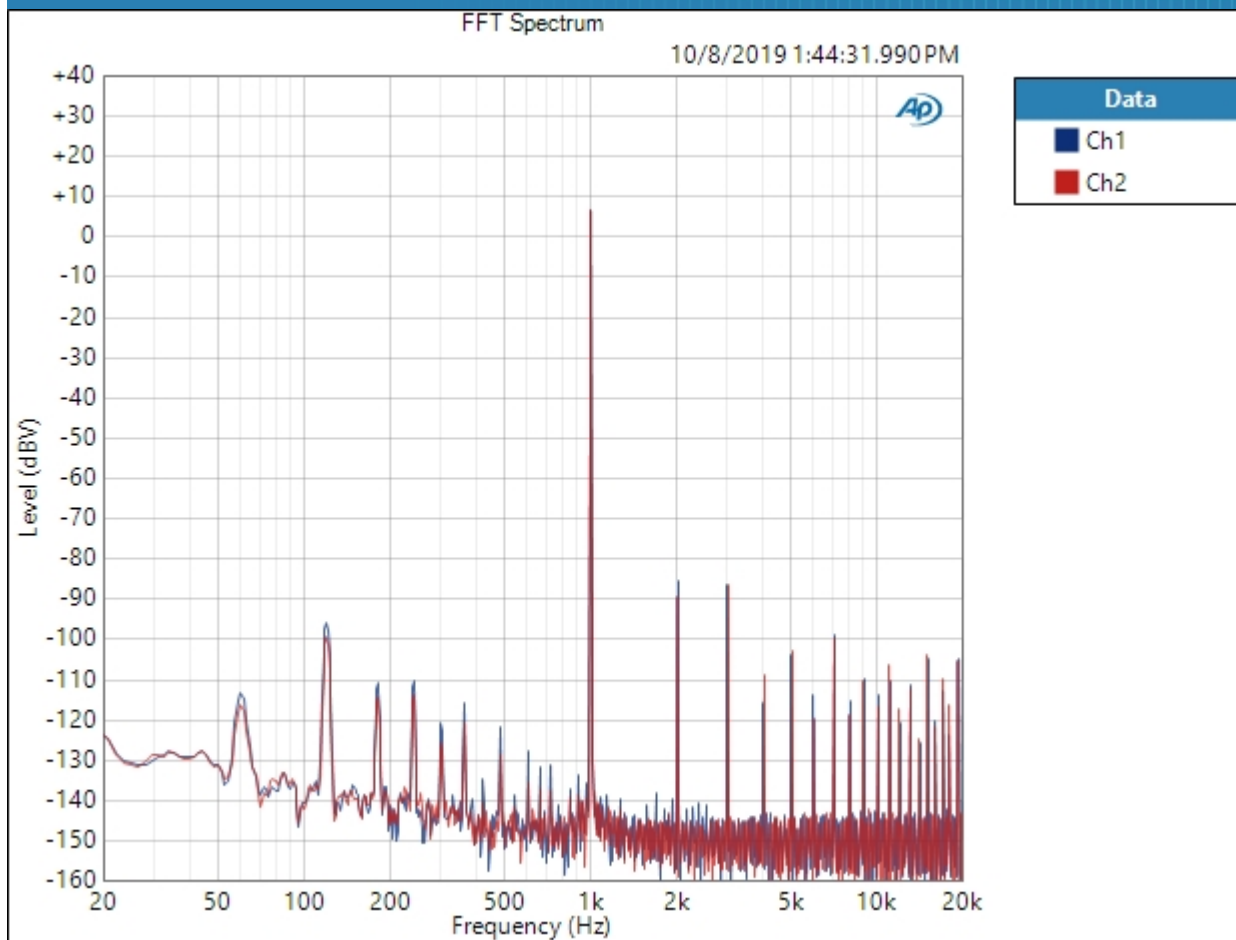


Result:  PASSED

Single Ended : Signal Analyzer -20dB

Waveform: Sine
Generator Level: -20.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 10/8/2019 1:44:35 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 32K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:44:35.569 PM)

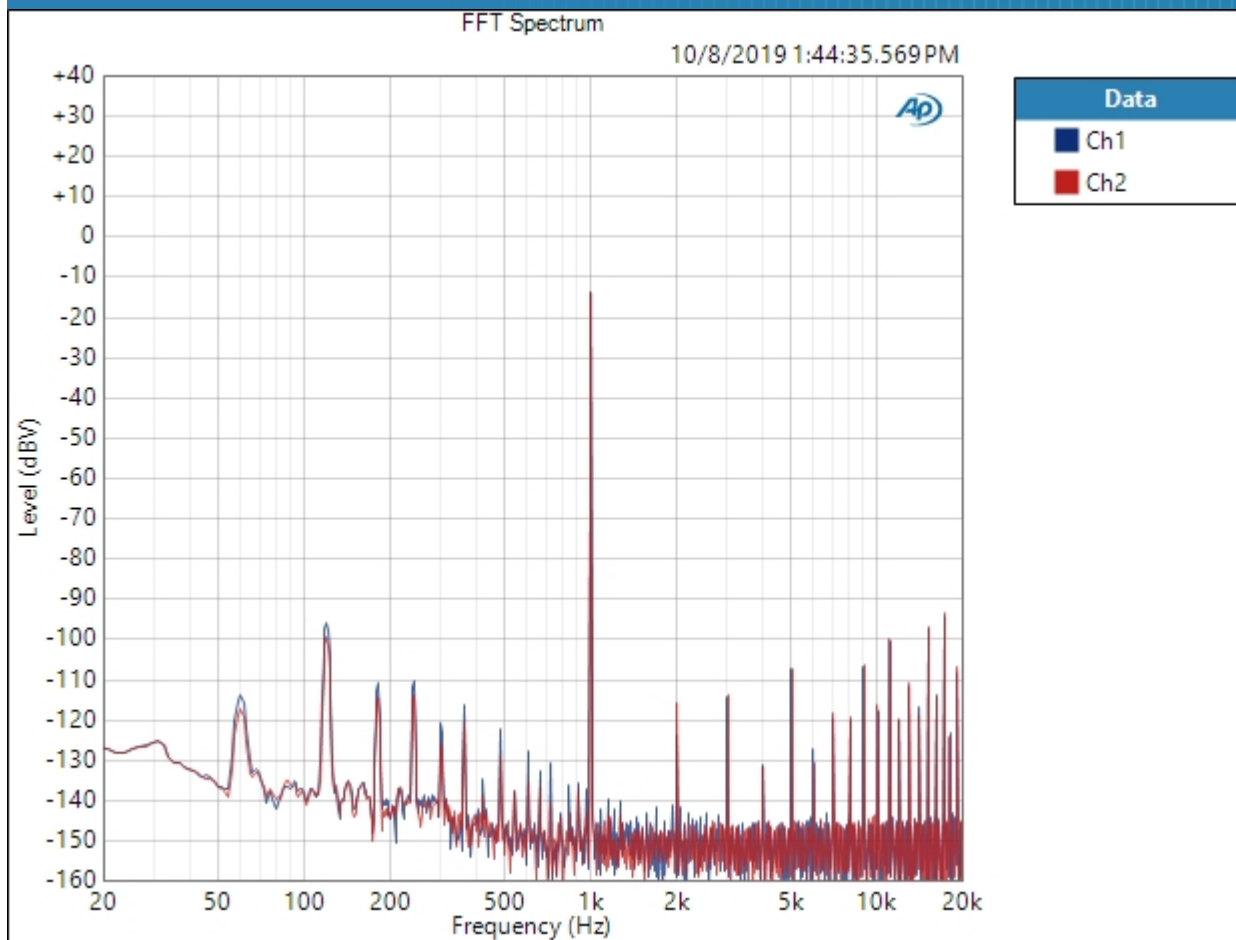


Result:  PASSED

Single Ended : Signal Analyzer -60dB

Waveform: Sine
Generator Level: -60.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 10/8/2019 1:44:39 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 32K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:44:39.168 PM)

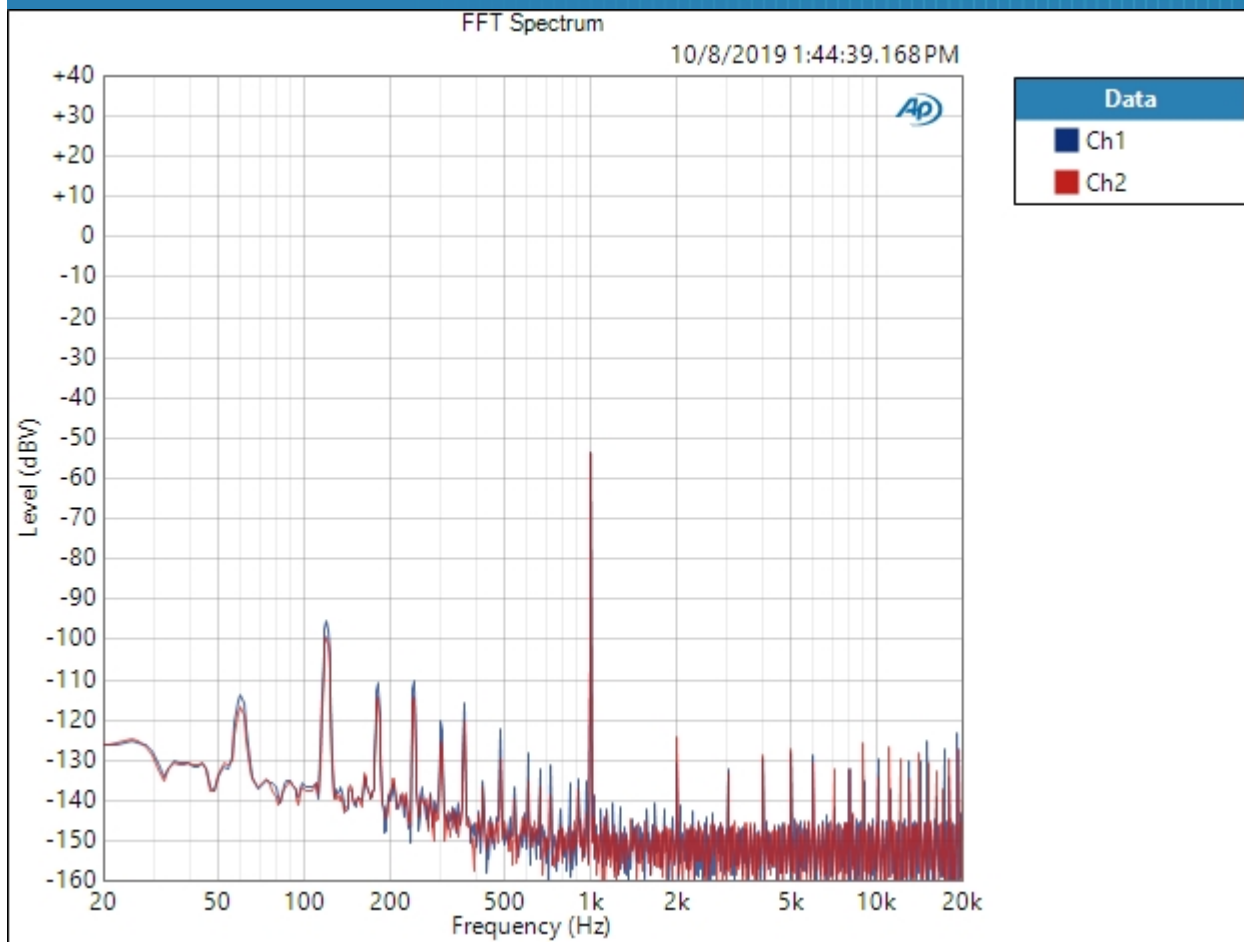


Result:  PASSED

Single Ended : Signal Analyzer -120dB

Waveform: Sine
Generator Level: -120.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 10/8/2019 1:44:57 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 256K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:44:57.435 PM)

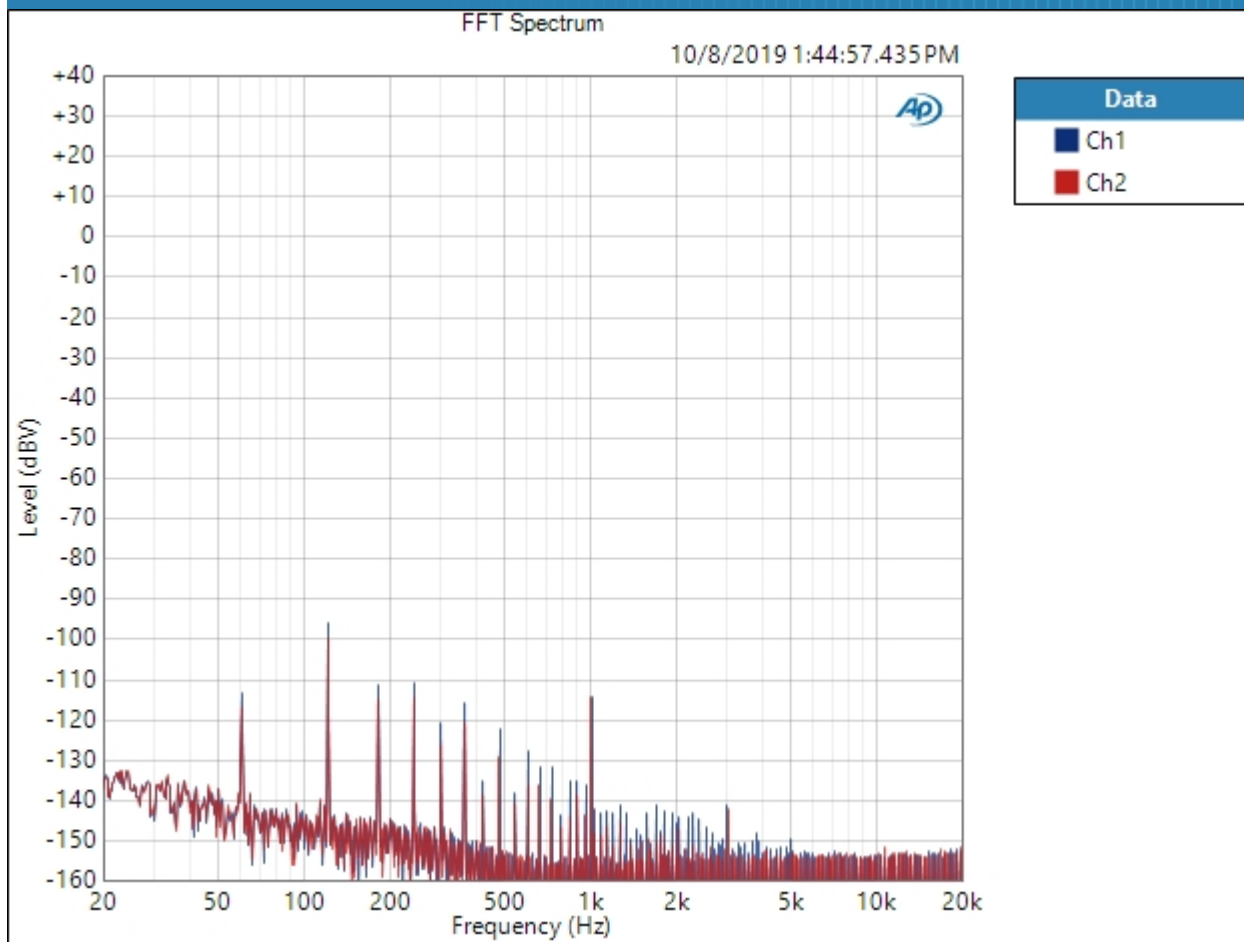


Result: PASSED

Single Ended : Signal Analyzer -144dB

Waveform: Sine
Generator Level: -144.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Secondary Source: None
Measured 1 10/8/2019 1:45:15 PM
Acquisition Type: Auto
Trigger: Free Run
Delay Time: 250.0 ms
Input Bandwidth: Use Signal Path
FFT Length: 256K
Averaging: Power
Averages: 3
Window: AP-Equiripple
Record Acquisition: False
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:45:15.733 PM)

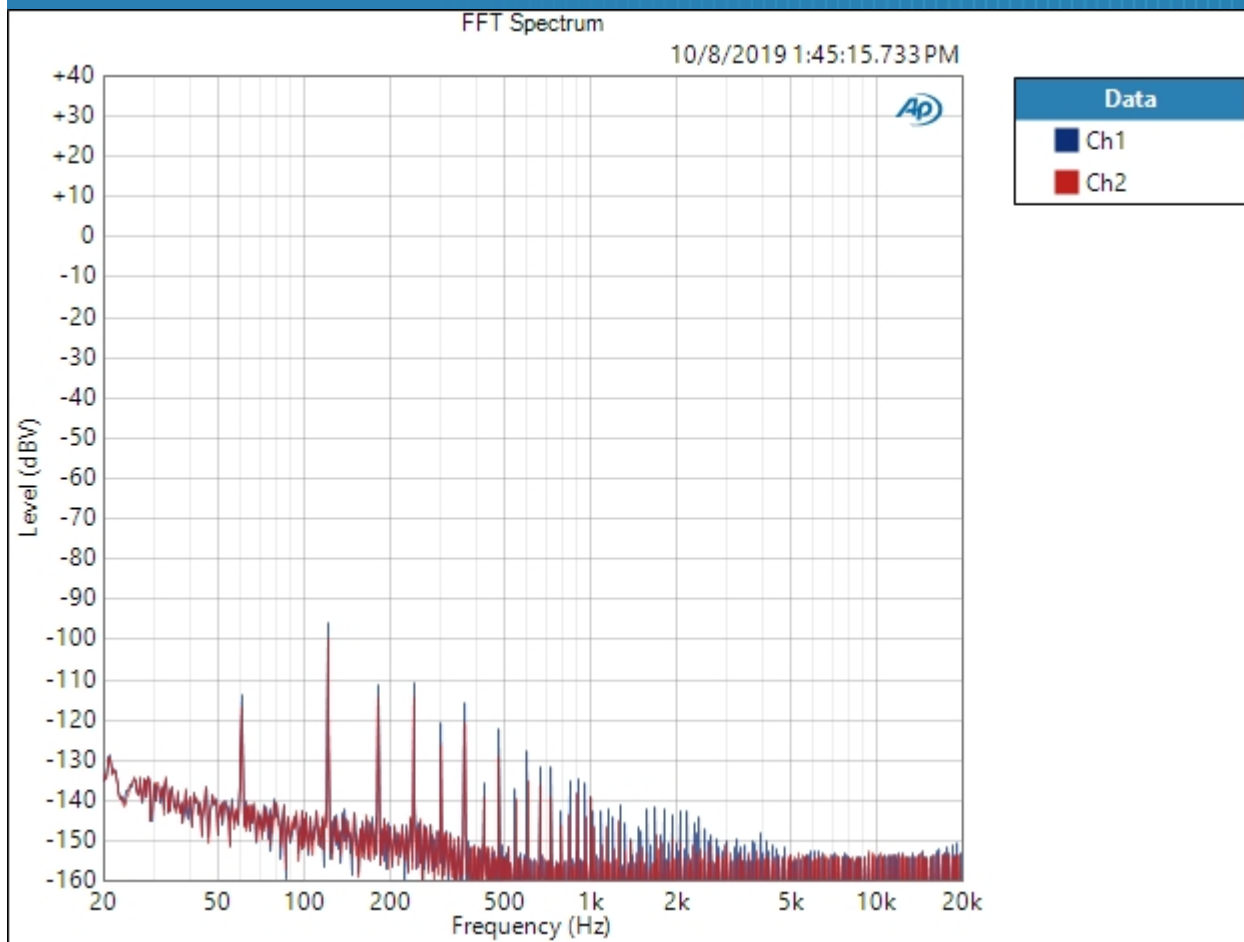


Result:  PASSED

Single Ended : Frequency Response


Start Frequency: 20.0000 Hz
Stop Frequency: 20.0000 kHz
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
EQ: None
Pre-Sweep: 100.0 ms
Sweep: 350.0 ms
Extend Acquisition By: 500.0 ms
Secondary Source: None
Measured 1 10/8/2019 1:45:18 PM

RMS Level (10/8/2019 1:45:18.538 PM)

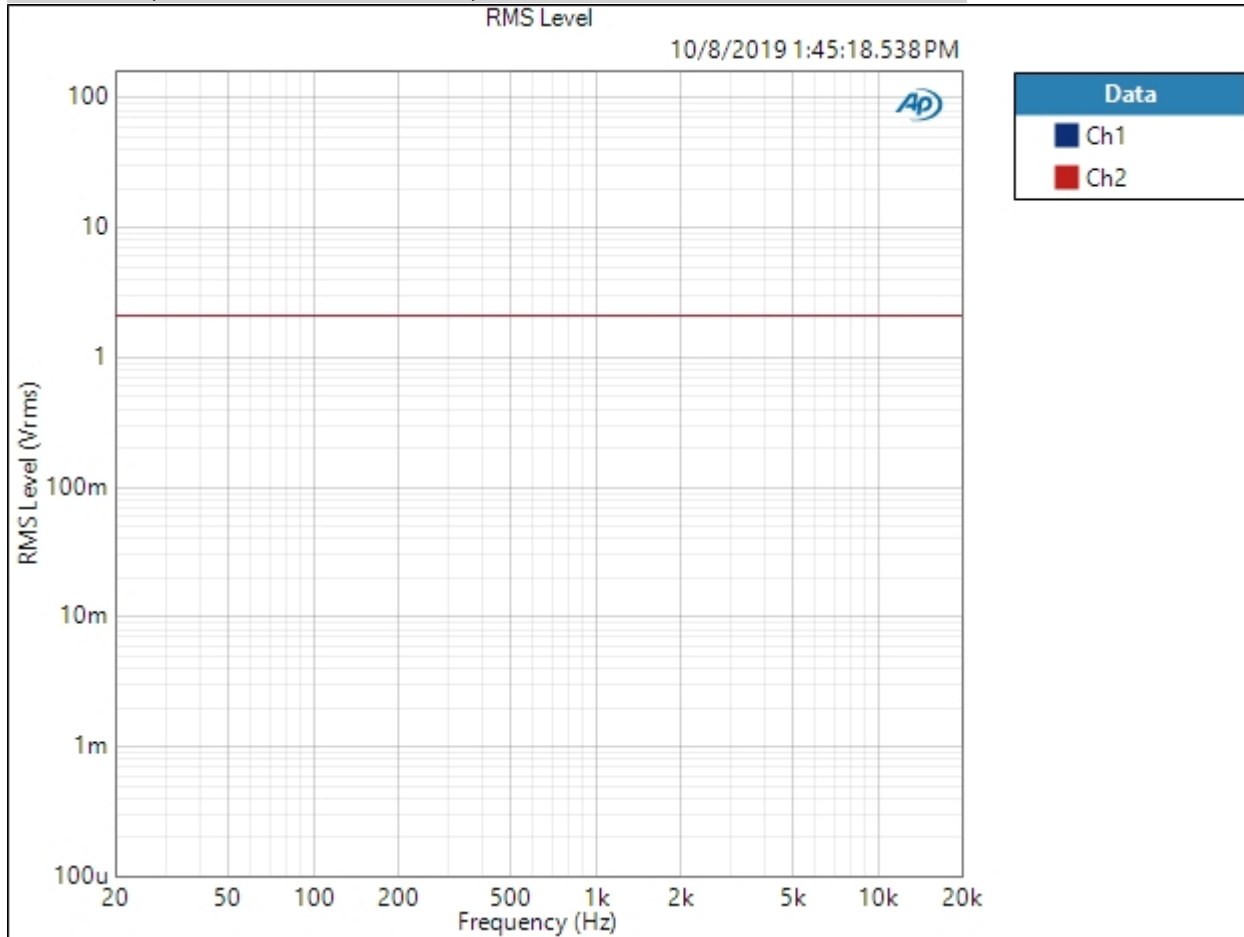

Result: PASSED

Relative Level (1.00000 kHz) (10/8/2019 1:45:18.538 PM)

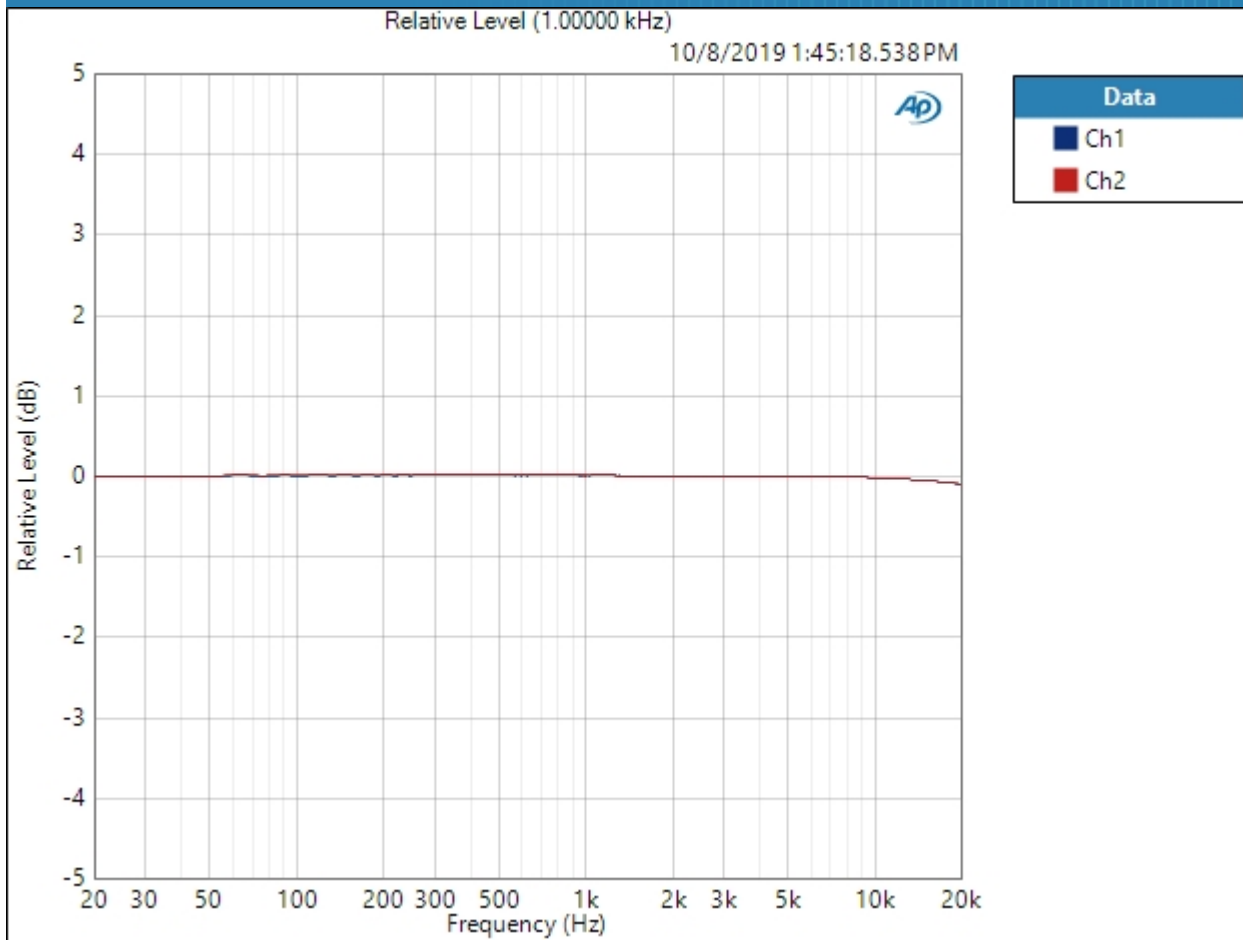

Relative Level (1.00000 kHz) Parameters

Mode: Normalized at Reference

Ref Frequency: 1.00000 kHz

Result: ✔ PASSED

Deviation (20.0000 Hz - 20.0000 kHz) (10/8/2019 1:45:18.538 PM)

Ch1 ± 0.055 dB

Ch2 ± 0.055 dB

Deviation (20.0000 Hz - 20.0000 kHz) Parameters

Min: 20.0000 Hz

Max: 20.0000 kHz

Single Ended : Signal to Noise Ratio

Waveform: Sine
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Low-pass Filter: 20 kHz
Weighting Filter: A-wt.
High-pass Filter: 20 Hz

Signal to Noise Ratio (10/8/2019 1:45:20.376 PM)

Ch1 115.529 dB
Ch2 118.175 dB

Single Ended : THD+N

Waveform: Sine
 Generator Level: -0.000 dBFS
 DC Offset: 0.000 D
 Frequency: 1.00000 kHz
 Low-pass Filter: 20 kHz
 Weighting Filter: Signal Path
 High-pass Filter: 20 Hz
 Notch Tuning Mode: Measured Frequency

THD+N Ratio (10/8/2019 1:45:22.434 PM)

Ch1 0.003656 %
 Ch2 0.003036 %

THD Ratio (10/8/2019 1:45:22.434 PM)

Ch1 0.003582 %
 Ch2 0.003002 %

Noise Ratio (10/8/2019 1:45:22.434 PM)

Ch1 0.000839 %
 Ch2 0.000552 %

Distortion Product Ratio (10/8/2019 1:45:22.434 PM)

Channel	F	H2	H3	H4	H5	H6	H7	H8	H9	H10
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch1	-0.00	-91.67	-92.74	-128.91	-111.45	-123.21	-104.27	-124.68	-113.27	-127.45
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch2	-0.00	-95.30	-92.77	-117.47	-109.78	-117.75	-104.92	-125.90	-114.28	-130.20


Distortion Product Ratio Parameters

Frequency Unit: Hz
 Ratio Unit: dB

Single Ended : IMD Level Sweep (CCIF)

IMD Type: CCIF
Waveform: IMD
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Mean Frequency: 12.5000 kHz
Diff Frequency: 80.0000 Hz
IMD Split: False
Start Level: -60.000 dBFS
Stop Level: -0.000 dBFS
Step Type: Linear
Number of Points: 31
Step Size: +2.000 dBFS
Mode: d2
Measured 1 10/8/2019 1:45:35 PM

CCIF Ratio (10/8/2019 1:45:35.093 PM)

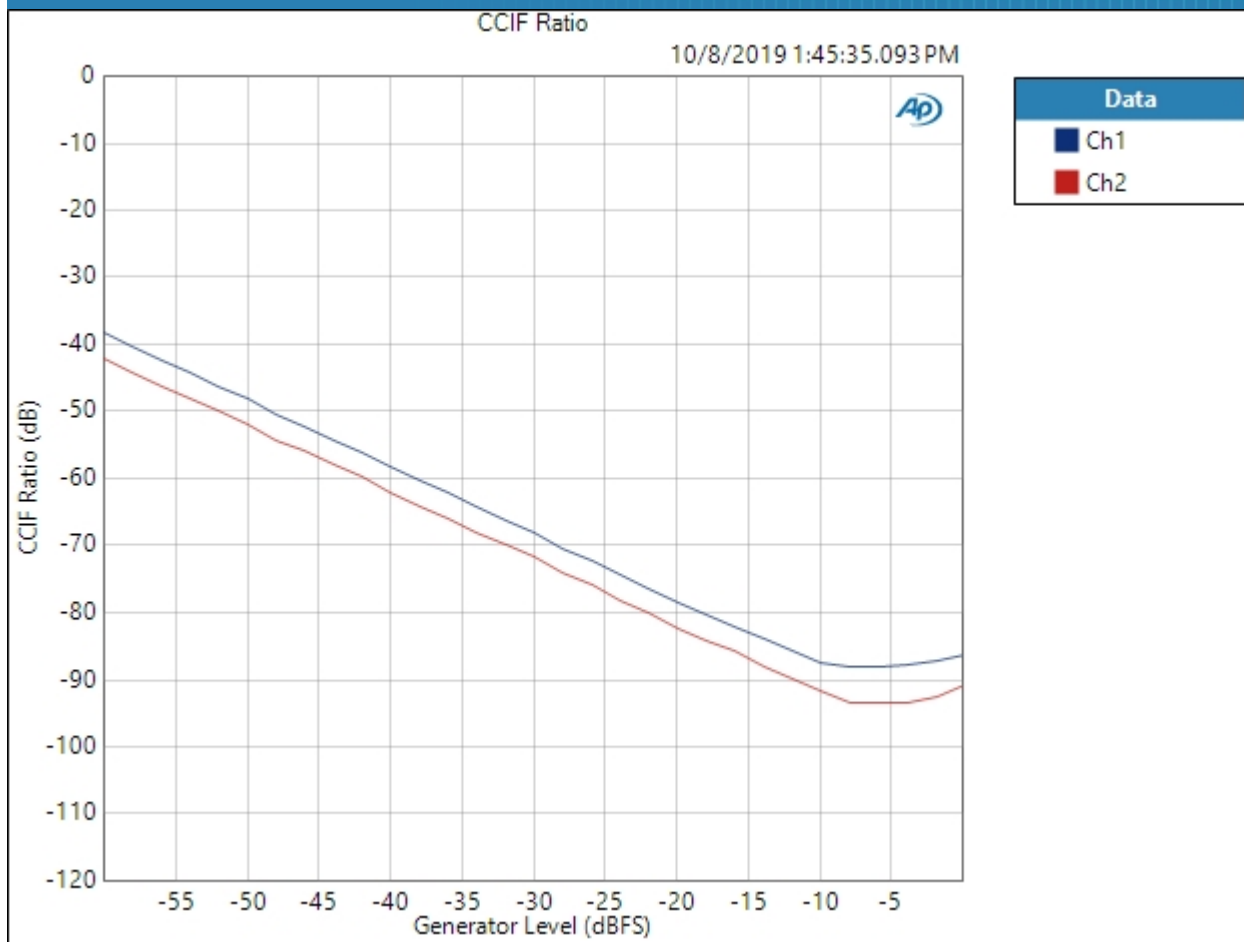

Result: PASSED


Schiit DAC APx555 Standard Test Suite: Yggdrasil Analog 2/Gen 5



Single Ended : IMD Frequency Sweep (CCIF)

Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Sweep Frequency: Mean Frequency
Mean Frequency: 12.5000 kHz
Diff Frequency: 80.0000 Hz
IMD Split: False
Start Frequency: 20.0000 kHz
Stop Frequency: 250.000 Hz
Step Type: Logarithmic
Number of Points: 31
Mode: d2
Measured 1 10/8/2019 1:45:43 PM

CCIF Ratio (10/8/2019 1:45:43.041 PM)

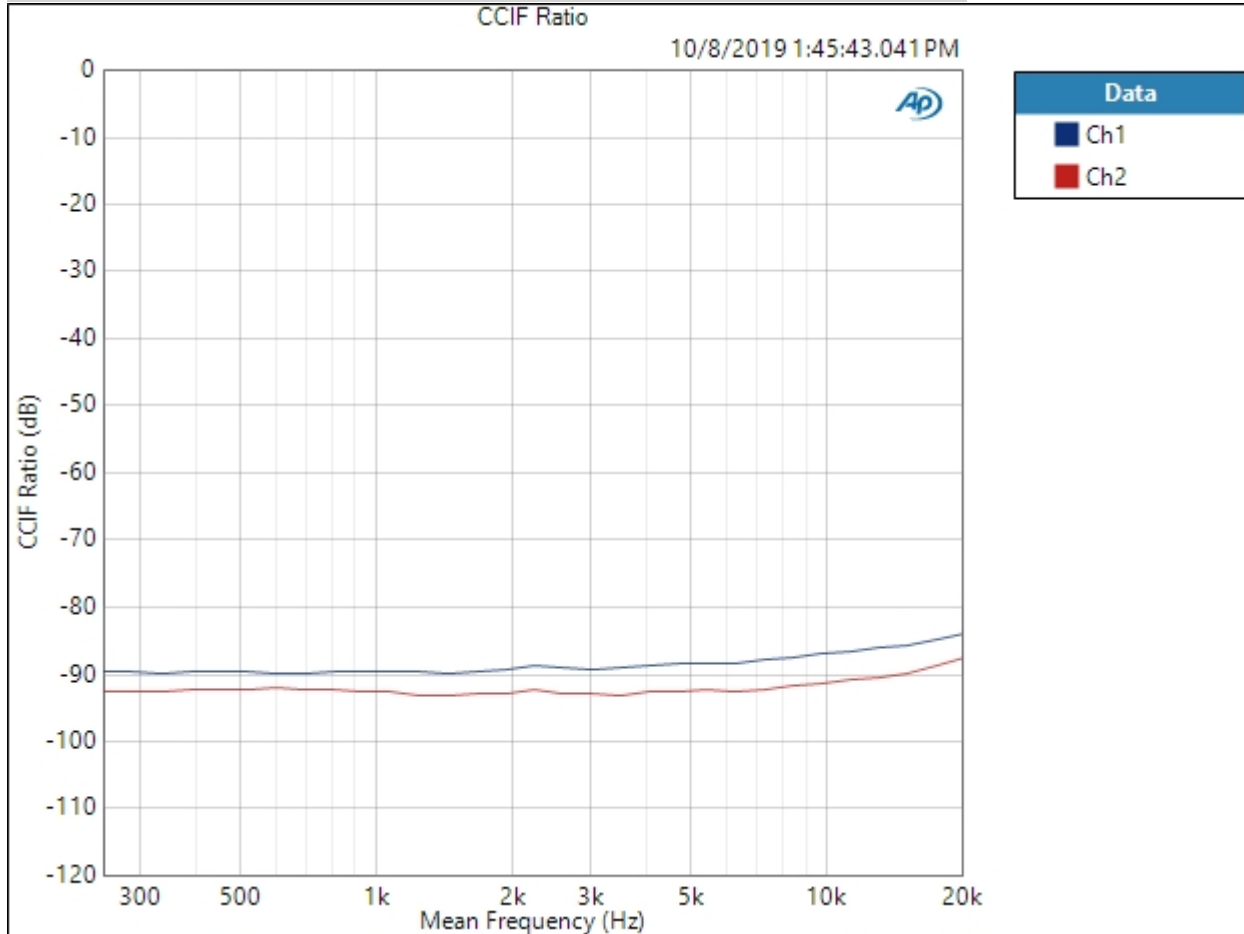

10/8/2019 1:49 PM

Result:  PASSED

Single Ended : Crosstalk, One Channel Undriven

Waveform: Sine

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Frequency: 10.0000 kHz

Crosstalk (10/8/2019 1:45:44.197 PM)

Ch1 -100.969 dB

Ch2 -96.212 dB

Single Ended : Crosstalk Sweep, One Channel Driven

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Start Frequency: 20.0000 kHz


Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15

Measured 1 10/8/2019 1:46:29 PM

Crosstalk (10/8/2019 1:46:29.389 PM)

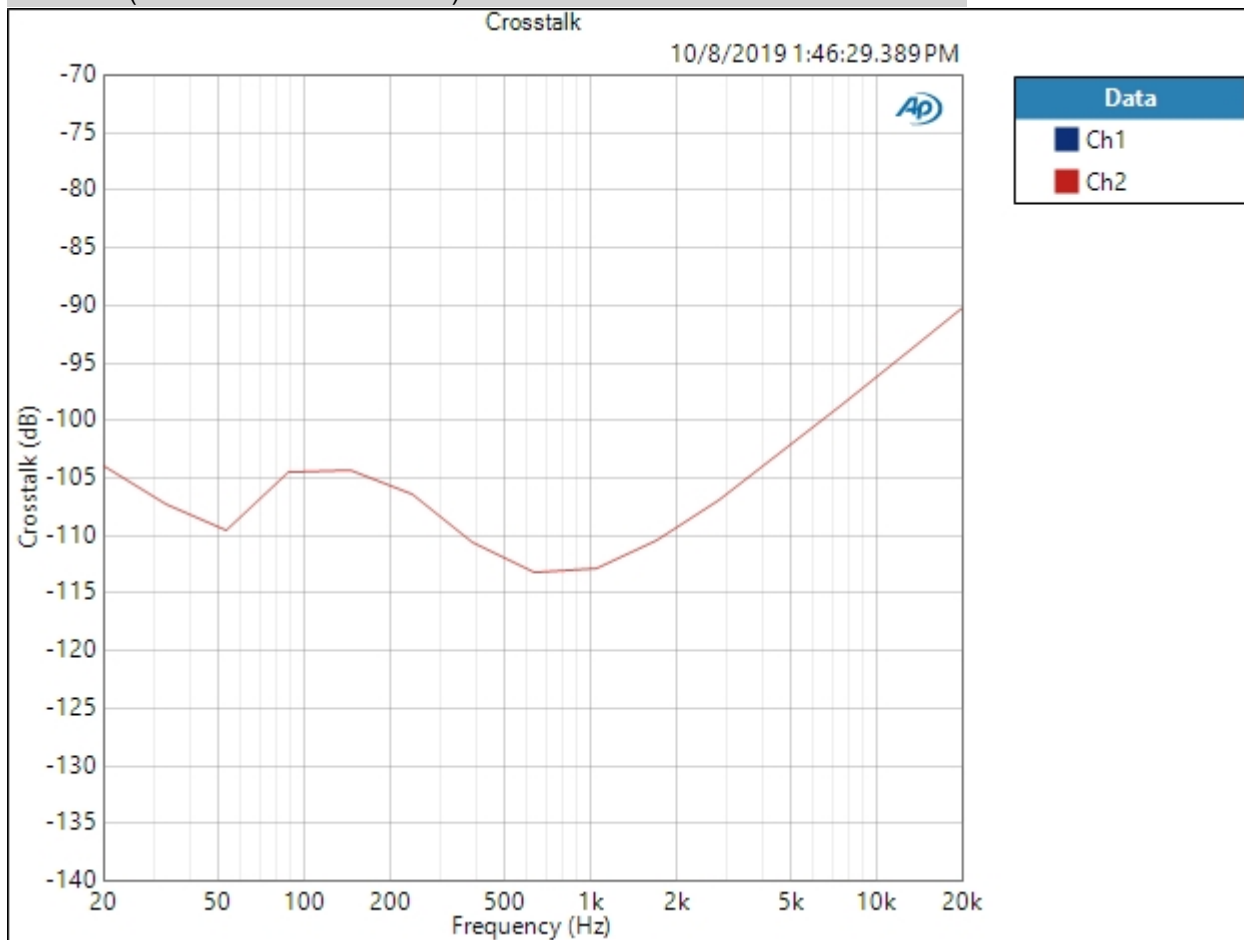


Crosstalk Parameters

Source: Ch1

Result: PASSED

Single Ended : Bandpass Level Sweep

Waveform: Sine
Generator Level: -20.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz
Start Level: -140.000 dBFS
Stop Level: -0.000 dBFS
Step Type: Linear
Number of Points: 71
Step Size: +2.000 dBFS
Offset: 0.000 D
Selectivity: Window width
Bandpass Tuning Mode: Generator Frequency
Measured 1 10/8/2019 1:48:35 PM
Linearity (-20.000 dBFS) (10/8/2019 1:48:35.040 PM)

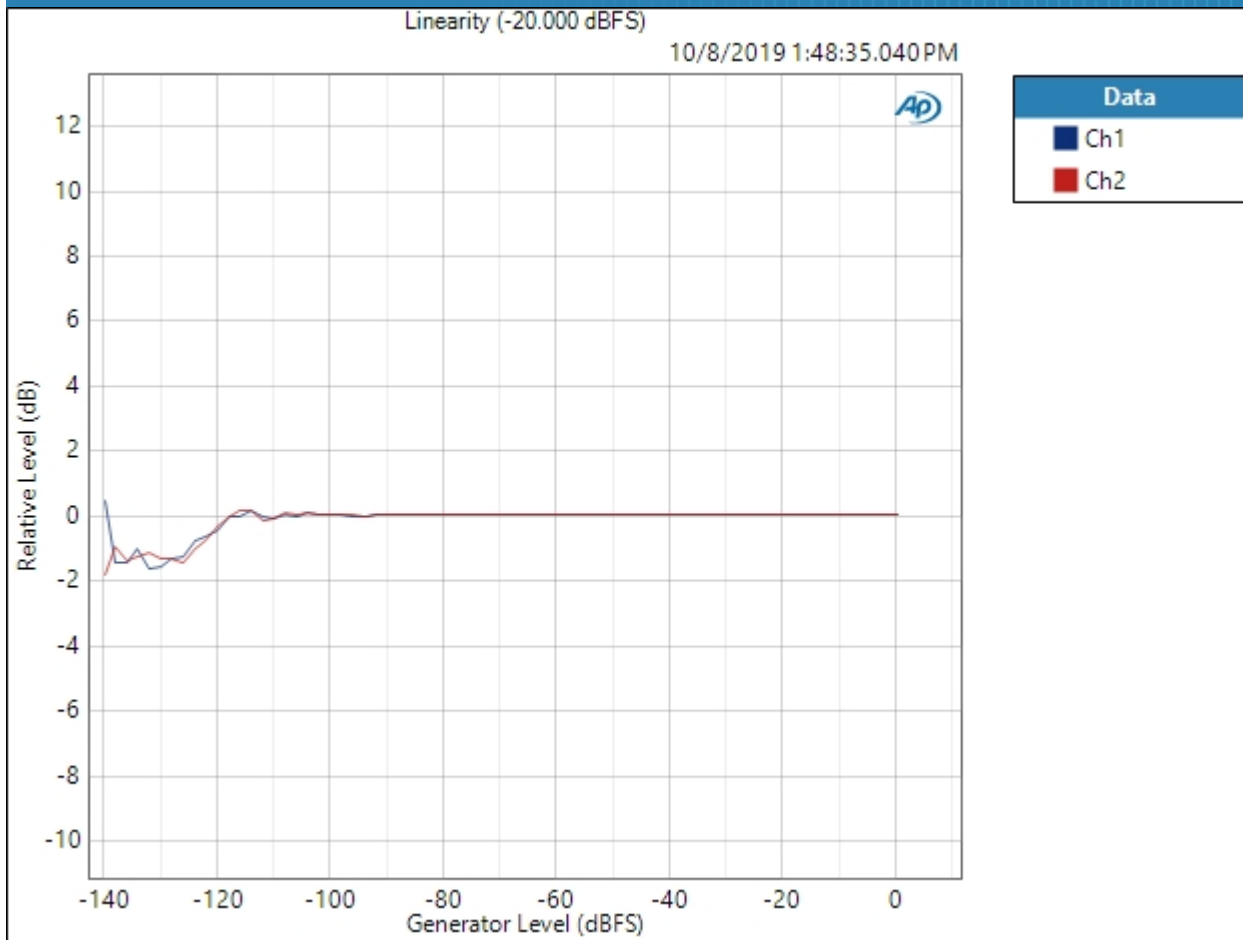

Linearity (-20.000 dBFS) Parameters

Mode: Normalized at Reference

Relative Level: -20.000 dBFS

Result: PASSED

Jitter : Signal Path Setup

Output Connector:	Digital Optical
Output Sample Rate:	44.1000 kHz
Output Bit Depth:	24
Dither:	Enabled
Output Mode:	Consumer
Status Bits:	Auto (Consumer)
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
High Performance Sine Analyzer:	Disabled
Input Bandwidth:	AC (<10 Hz) - 22.4k (48 kHz SR)
Device Delay:	0.000 s
Input EQ:	None
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled

• Triggers

Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising

Jitter : Jitter Level Sweep


• Audio Generator

Waveform: Sine
Generator Level: -0.000 dBFS
DC Offset: 0.000 D
Frequency: 1.00000 kHz

• Jitter Generator


Jitter Waveform: Sine
Start Level: 5.000 ps
Stop Level: 5.000 ns
Step Type: Logarithmic
Number of Points: 31
Jitter Frequency: 1.00000 kHz
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz
Notch Tuning Mode: Generator Frequency
Secondary Source: None
Measured 1 10/8/2019 1:48:55 PM

THD+N Level (10/8/2019 1:48:55.241 PM)

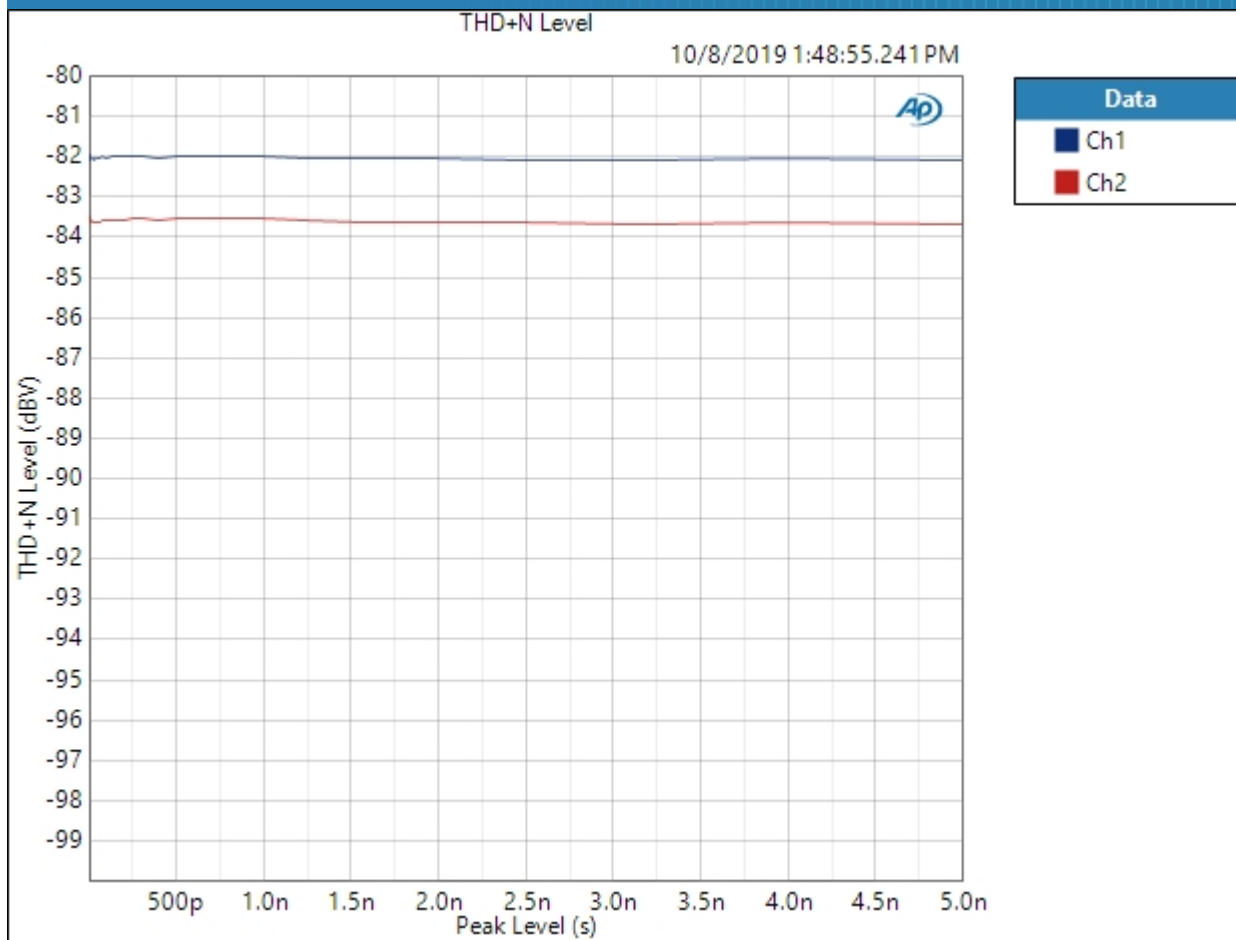

Result: ✔ PASSED

Distortion Product Level (H2) (10/8/2019 1:48:55.241 PM)

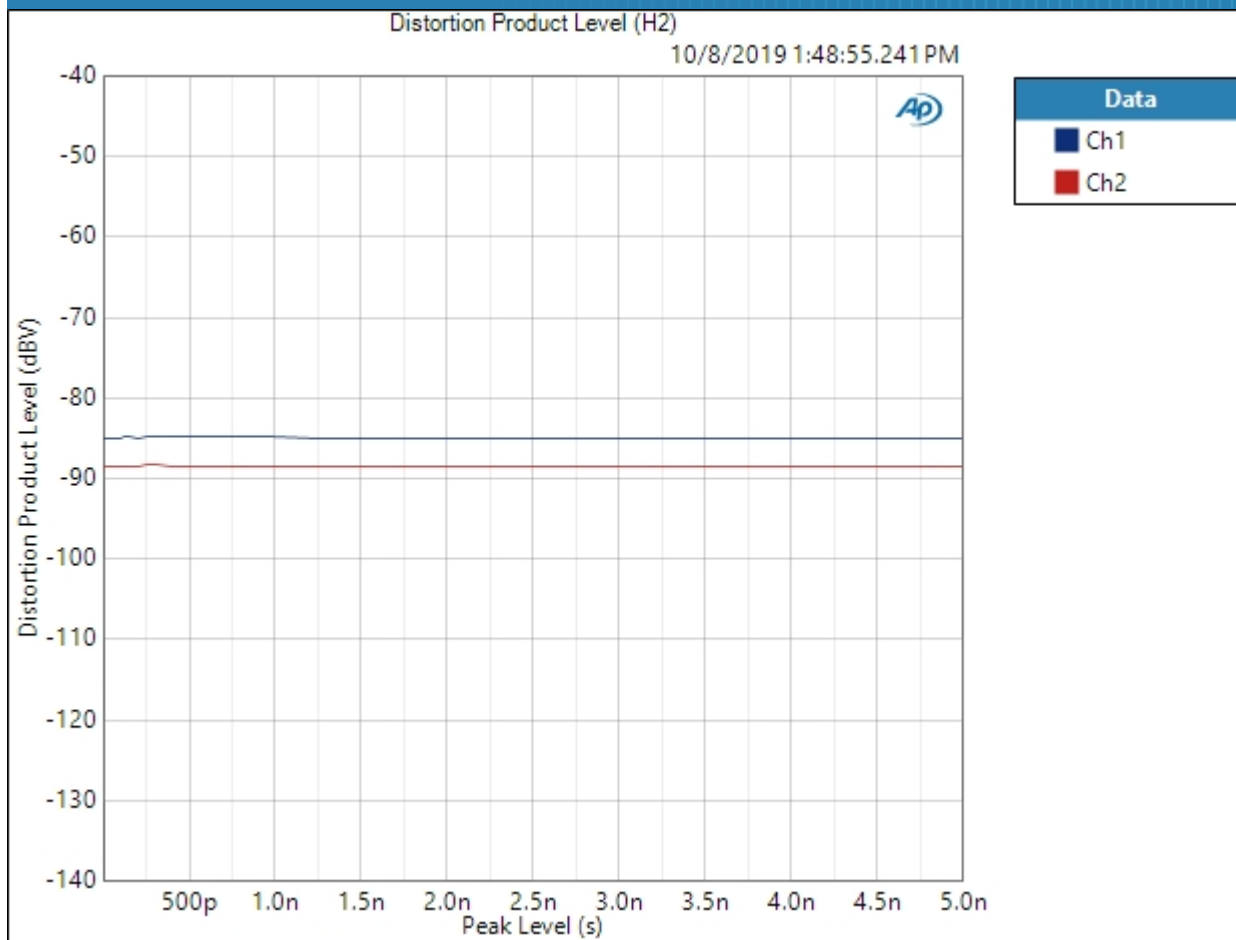

Distortion Product Level (H2) Parameters

Harmonics: Single Harmonic

Harmonic Number: 2

Result: PASSED