

## Schiit DAC APx555 Standard Test Suite: Yggdrasil GS



### Notes:

If you have difficulties reproducing these results, check your analyzer set-up and ancillary equipment carefully, ensure your analyzer has had a recent calibration, and contact the analyzer manufacturer for help if necessary. If you still have significantly different results, please contact [info@schiiit.com](mailto:info@schiiit.com) with a copy of your results so we can bring back your product and check it against our standard.

### APx Instrument

Instrument ID:	11571
Calibration Date:	5/8/2018
APx Version:	5.0.0.105.133644

Balanced : Signal Path Setup

Output Connector:	ASIO
Output Sample Rate:	48.0000 kHz
Output EQ:	None
Input Connector:	Analog Balanced
Channels:	2
Termination:	200 kohm
High Performance Sine Analyzer:	Enabled
Input Bandwidth:	AC (<10 Hz) - 22.4k (48 kHz SR)
Device Delay:	0.000 s
Input EQ:	None
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V

Edge: Rising

Balanced : Level and Gain

Waveform: Sine  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz

RMS Level (10/8/2019 1:23:45.891 PM)

Ch1 4.239 Vrms  
Ch2 4.244 Vrms

Balanced : DC Level

Waveform: Sine  
Generator Level:  $-\infty$  dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Delay Time: 100.0 ms  
Acquisition Time: 333.0 ms


DC Level (10/8/2019 1:23:46.951 PM)

Ch1 -141.8 uV  
Ch2 -33.40 uV

Balanced : Signal Analyzer 0dB

Waveform: Sine  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 10/8/2019 1:23:50 PM  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 32K  
Averaging: Power  
Averages: 3  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:23:50.581 PM)

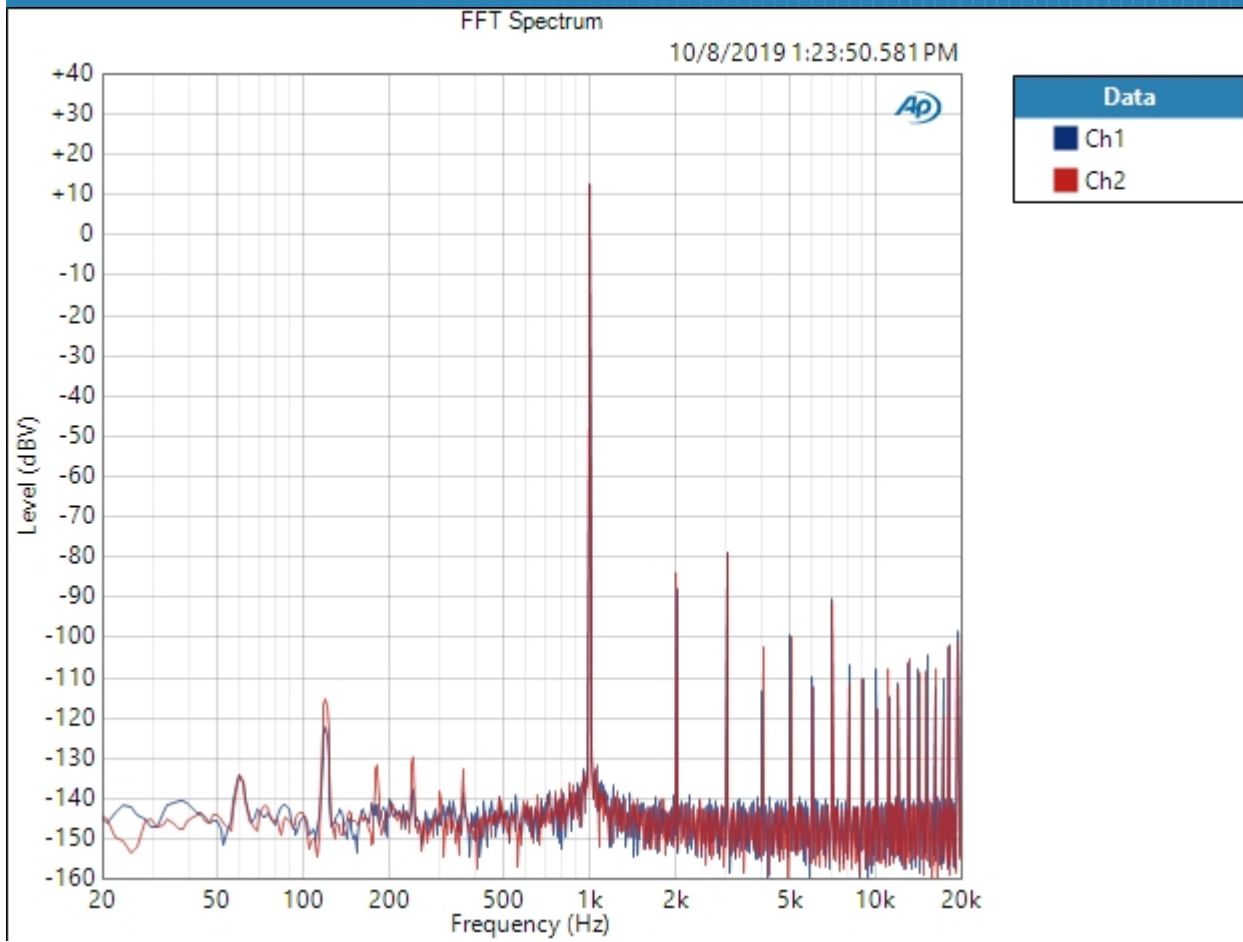


Result: PASSED

Balanced : Signal Analyzer -20dB

Waveform: Sine  
Generator Level: -20.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 10/8/2019 1:23:54 PM  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 32K  
Averaging: Power  
Averages: 3  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:23:54.201 PM)

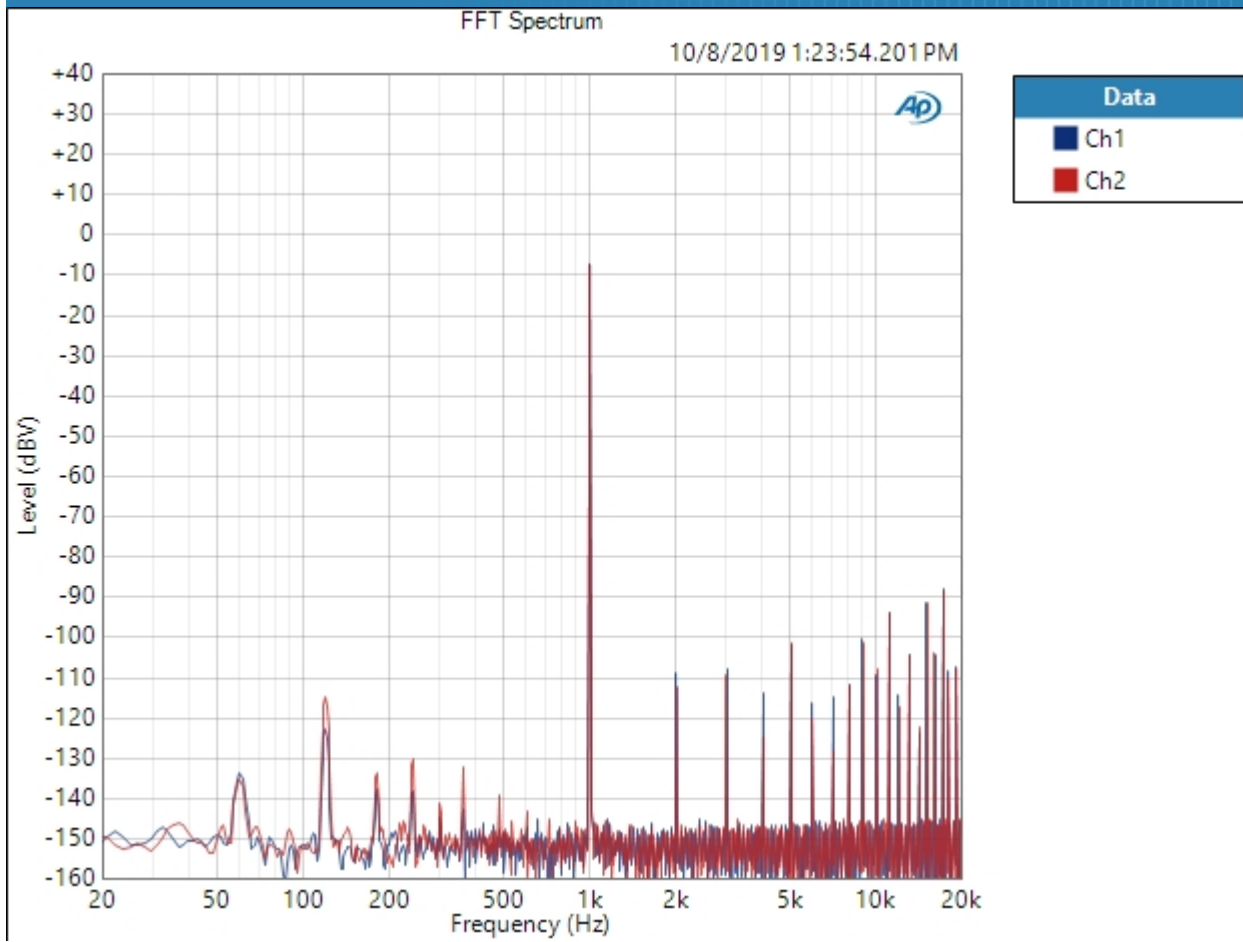


Result:  PASSED

Balanced : Signal Analyzer -60dB

Waveform: Sine  
Generator Level: -60.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 10/8/2019 1:23:57 PM  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 32K  
Averaging: Power  
Averages: 3  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:23:57.737 PM)



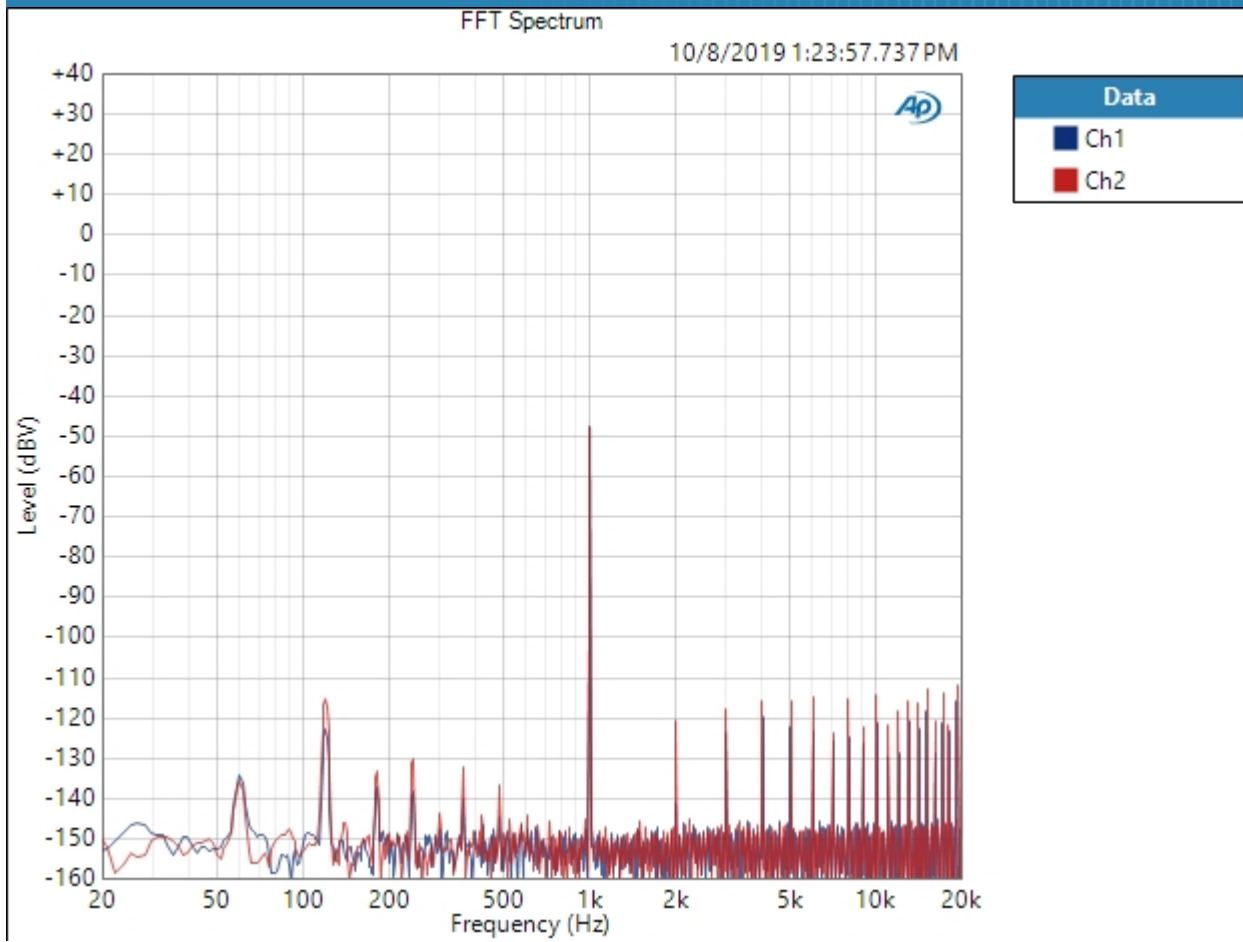


Result: PASSED

Balanced : Signal Analyzer -120dB


Waveform: Sine  
Generator Level: -120.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 10/8/2019 1:24:15 PM  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 256K  
Averaging: Power  
Averages: 3  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:24:15.900 PM)

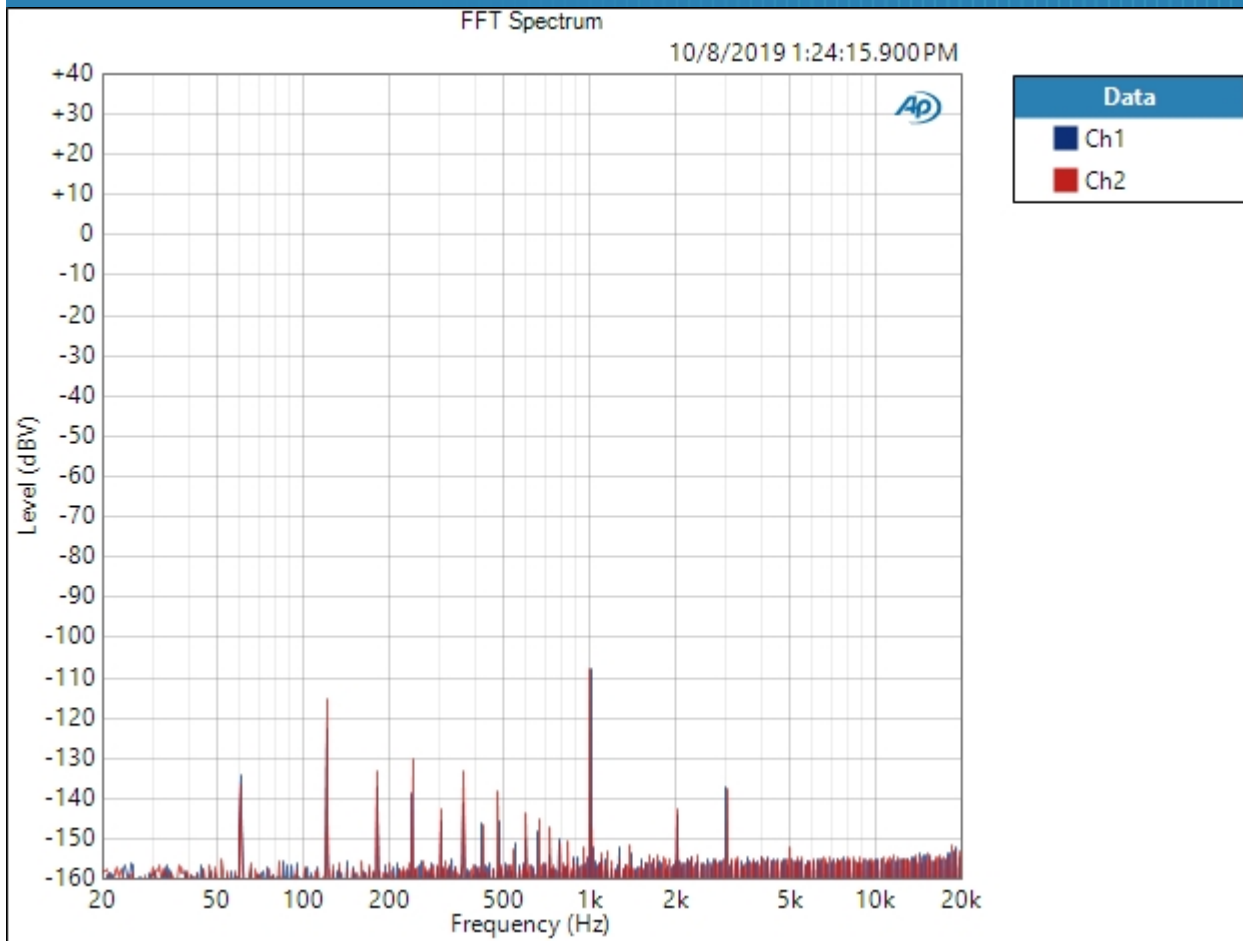

Result:  PASSED

Balanced : Signal Analyzer -144dB  
Waveform: Sine  
Generator Level: -144.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 10/8/2019 1:24:34 PM  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 256K  
Averaging: Power  
Averages: 3  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)  
FFT Spectrum (10/8/2019 1:24:34.167 PM)

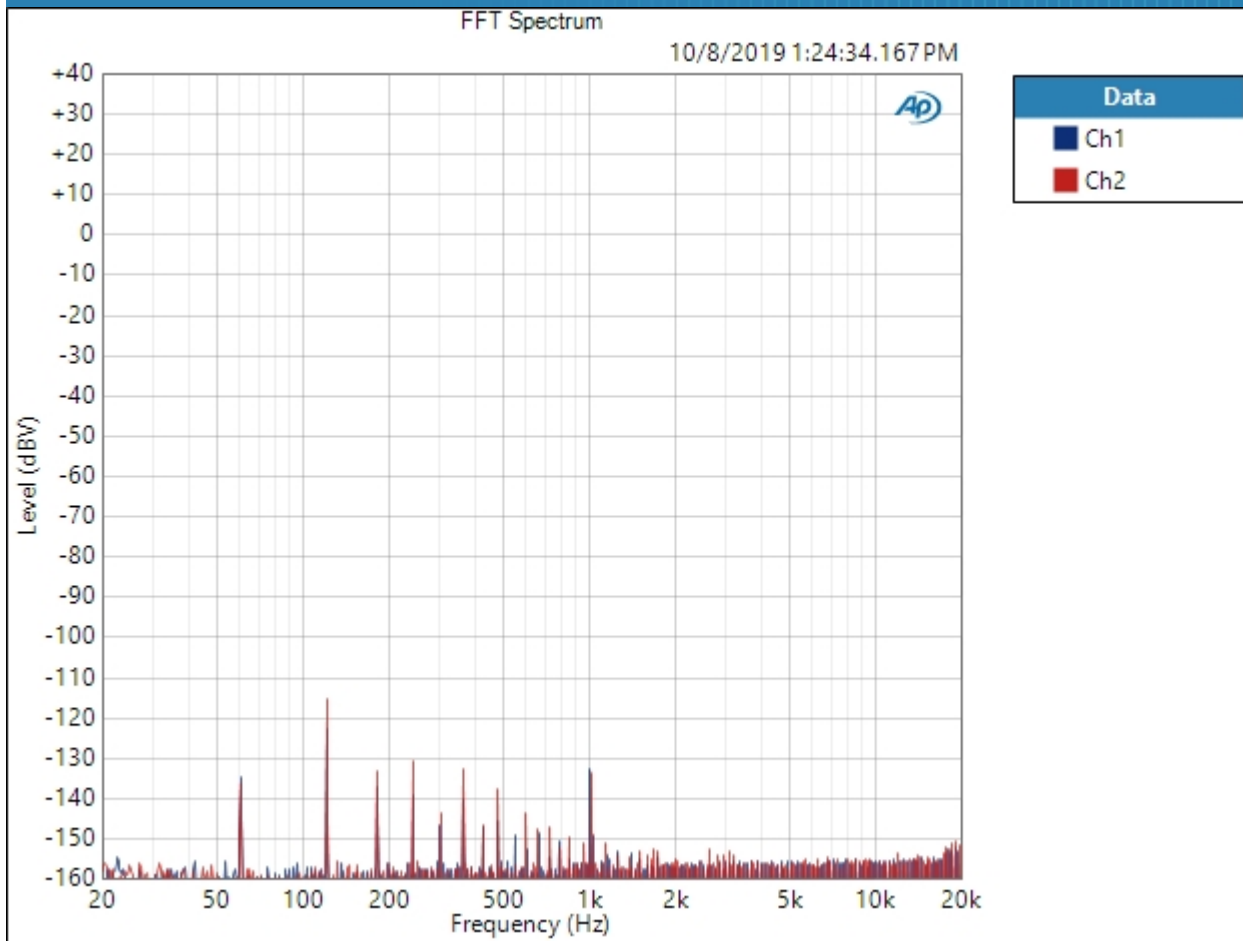


Result: PASSED

Balanced : Frequency Response


Start Frequency: 20.0000 Hz  
 Stop Frequency: 20.0000 kHz  
 Generator Level: -0.000 dBFS  
 DC Offset: 0.000 D  
 EQ: None  
 Pre-Sweep: 100.0 ms  
 Sweep: 350.0 ms  
 Extend Acquisition By: 500.0 ms  
 Secondary Source: None  
 Measured 1 10/8/2019 1:24:36 PM

RMS Level (10/8/2019 1:24:36.968 PM)

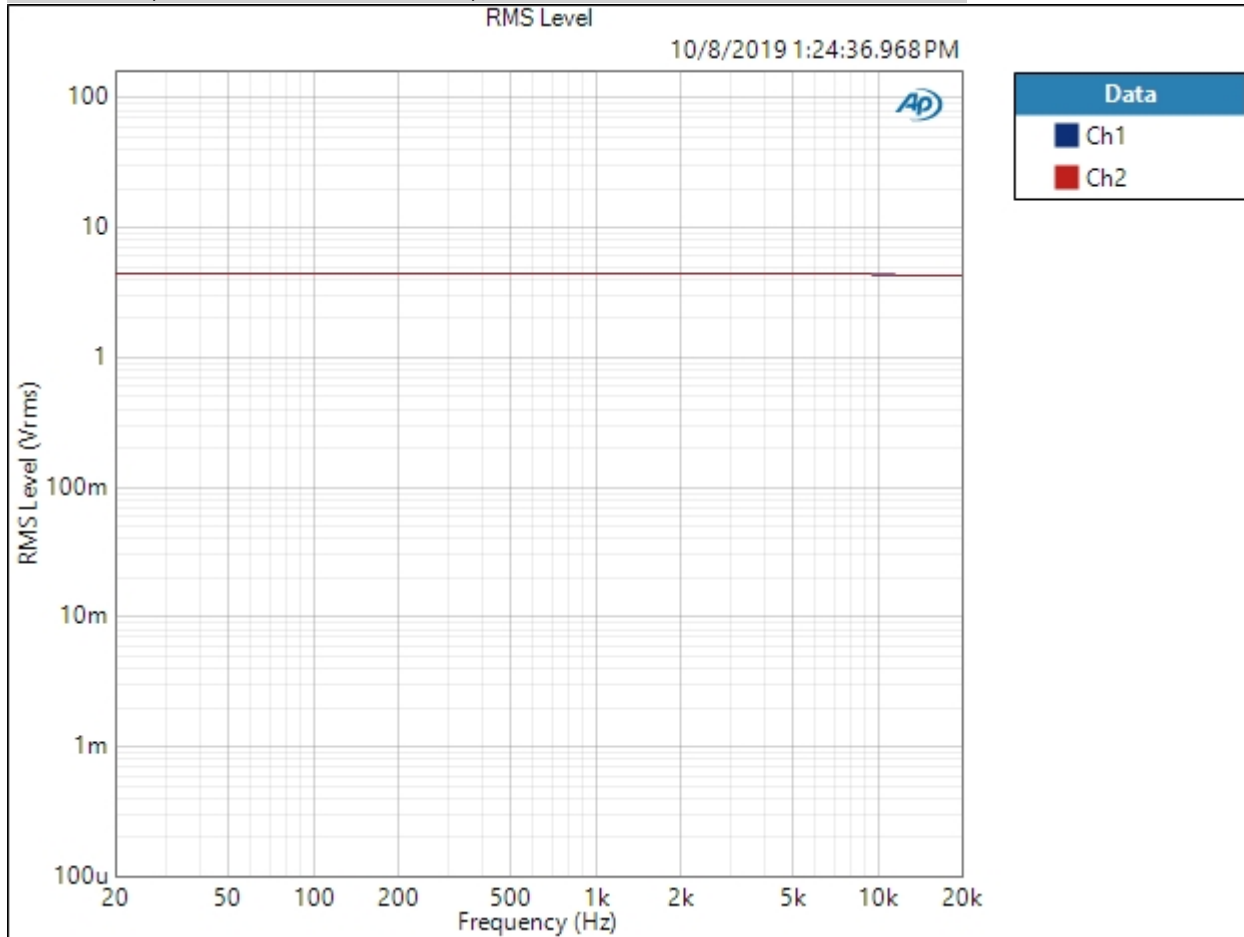

Result: PASSED

Relative Level (1.00000 kHz) (10/8/2019 1:24:36.968 PM)

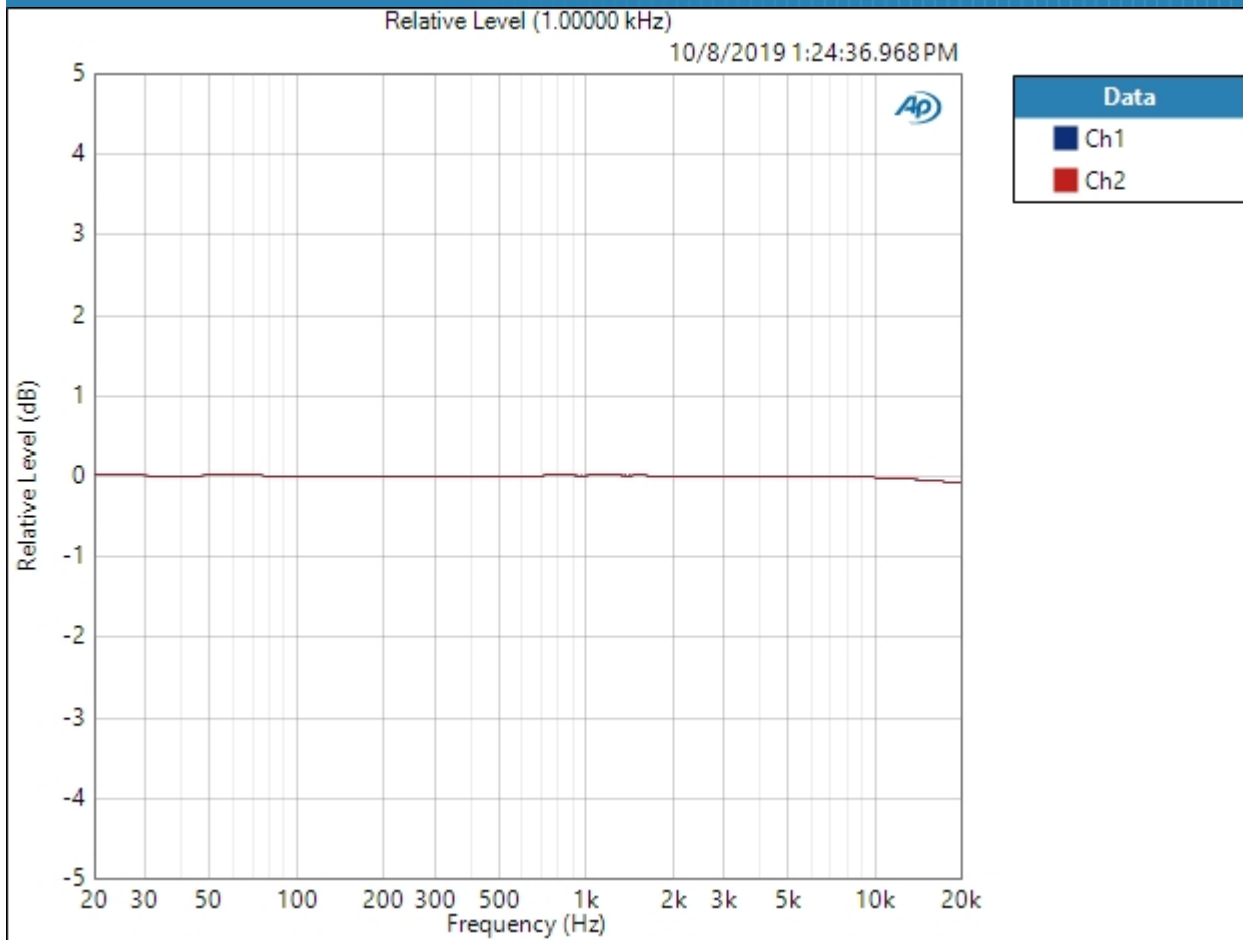

Relative Level (1.00000 kHz) Parameters

Mode: Normalized at Reference

Ref Frequency: 1.00000 kHz

Result: PASSED

Deviation (20.0000 Hz - 20.0000 kHz) (10/8/2019 1:24:36.968 PM)

Ch1  $\pm 0.059$  dB

Ch2  $\pm 0.057$  dB

Deviation (20.0000 Hz - 20.0000 kHz) Parameters

Min: 20.0000 Hz

Max: 20.0000 kHz

Balanced : Signal to Noise Ratio

Waveform: Sine

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Frequency: 1.00000 kHz

Low-pass Filter: 20 kHz

Weighting Filter: Signal Path

High-pass Filter: 20 Hz

Signal to Noise Ratio (10/8/2019 1:24:38.798 PM)

Ch1 126.985 dB

Ch2 124.627 dB



Balanced : THD+N

Waveform: Sine  
 Generator Level: -0.000 dBFS  
 DC Offset: 0.000 D  
 Frequency: 1.00000 kHz  
 Low-pass Filter: 20 kHz  
 Weighting Filter: Signal Path  
 High-pass Filter: 20 Hz  
 Notch Tuning Mode: Measured Frequency

THD+N Ratio (10/8/2019 1:24:40.817 PM)

Ch1 0.002943 %  
 Ch2 0.003131 %

THD Ratio (10/8/2019 1:24:40.817 PM)

Ch1 0.002950 %  
 Ch2 0.003140 %

Noise Ratio (10/8/2019 1:24:40.817 PM)

Ch1 0.000087 %  
 Ch2 0.000085 %

Distortion Product Ratio (10/8/2019 1:24:40.817 PM)


Channel	F	H2	H3	H4	H5	H6	H7	H8	H9	H10
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch1	-0.00	-100.87	-91.42	-119.35	-110.77	-132.13	-102.92	-125.88	-120.38	-137.49
Ch2	-0.00	-96.50	-91.58	-120.80	-110.26	-135.03	-103.28	-133.80	-119.65	-131.02

Distortion Product Ratio Parameters

Frequency Unit: Hz  
 Ratio Unit: dB

Balanced : IMD Level Sweep ( CCIF )  
IMD Type: CCIF  
Waveform: IMD  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Mean Frequency: 12.5000 kHz  
Diff Frequency: 80.0000 Hz  
IMD Split: False  
Start Level: -60.000 dBFS  
Stop Level: -0.000 dBFS  
Step Type: Linear  
Number of Points: 31  
Step Size: +2.000 dBFS  
Mode: d2  
Measured 1 10/8/2019 1:24:53 PM

CCIF Ratio (10/8/2019 1:24:53.474 PM)

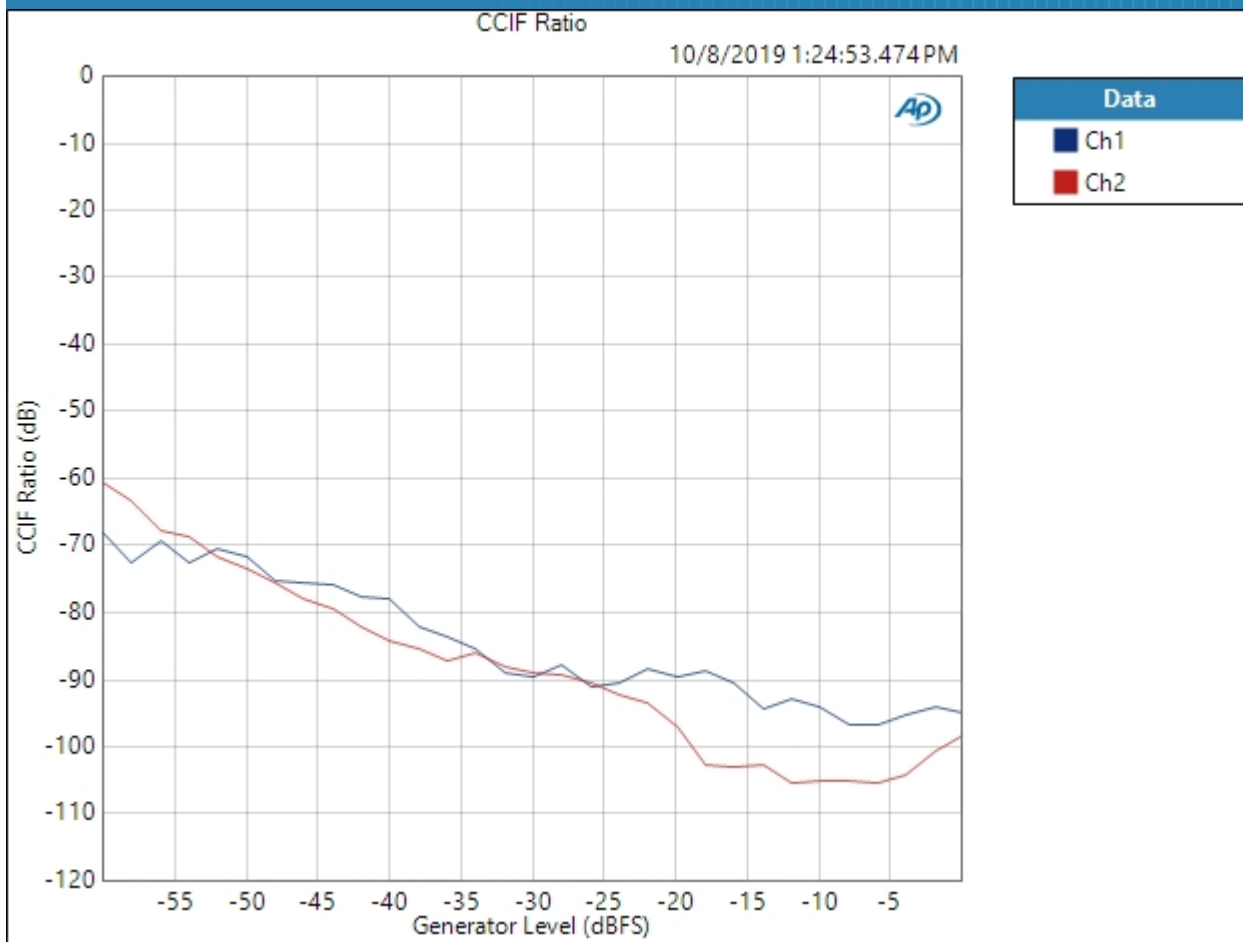


Result: PASSED

Balanced : IMD Frequency Sweep ( CCIF )

Generator Level: -0.000 dBFS  
 DC Offset: 0.000 D  
 Sweep Frequency: Mean Frequency  
 Mean Frequency: 12.5000 kHz  
 Diff Frequency: 80.0000 Hz  
 IMD Split: False  
 Start Frequency: 20.0000 kHz  
 Stop Frequency: 250.000 Hz  
 Step Type: Logarithmic  
 Number of Points: 31  
 Mode: d2+d3  
 Measured 1 10/8/2019 1:25:02 PM

CCIF Ratio (10/8/2019 1:25:02.192 PM)

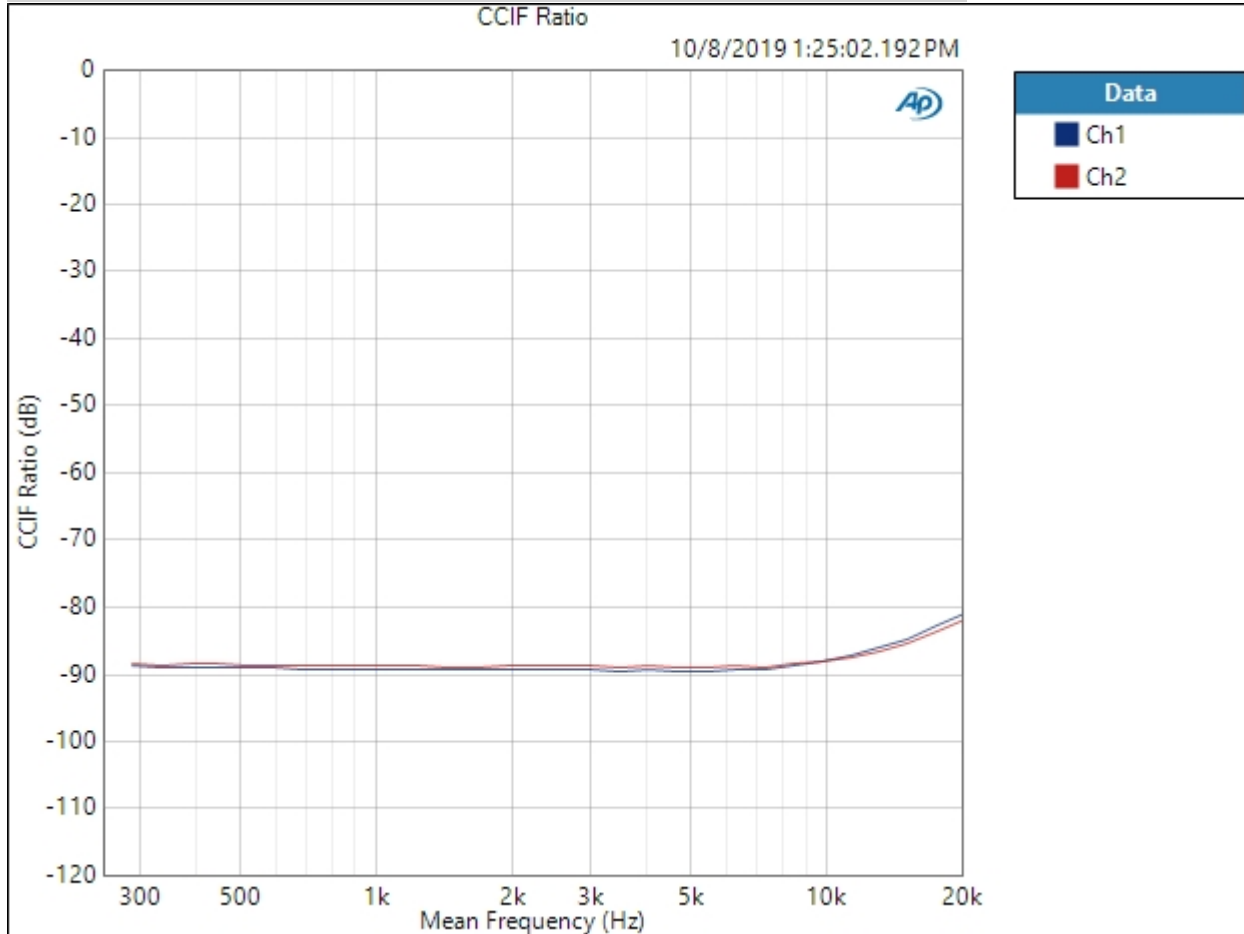

Result:  PASSED

Balanced : Crosstalk, One Channel Undriven

Waveform: Sine

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Frequency: 10.0000 kHz

Crosstalk (10/8/2019 1:25:05.701 PM)

Ch1 -146.006 dB

Ch2 -118.813 dB

Balanced : Crosstalk Sweep, One Channel Driven

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Start Frequency: 20.0000 kHz


Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15

Measured 1 10/8/2019 1:25:54 PM

Crosstalk (10/8/2019 1:25:54.464 PM)

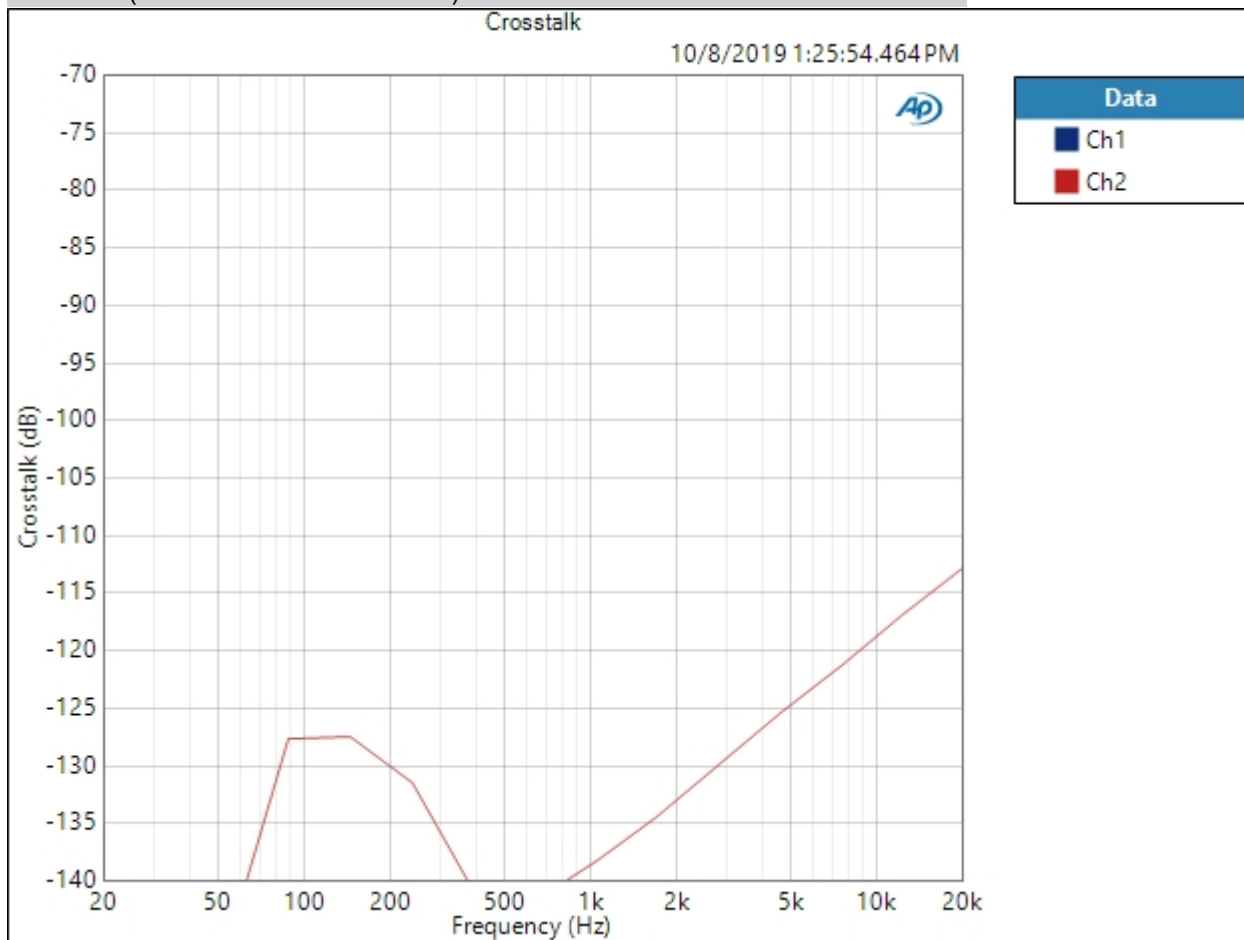


Crosstalk Parameters

Source: Ch1

Result: PASSED

Balanced : Bandpass Level Sweep

Waveform:	Sine
Generator Level:	-20.000 dBFS
DC Offset:	0.000 D
Frequency:	1.00000 kHz
Start Level:	-140.000 dBFS
Stop Level:	-0.000 dBFS
Step Type:	Linear
Number of Points:	71
Step Size:	+2.000 dBFS
Offset:	0.000 D
Selectivity:	Window width
Bandpass Tuning Mode:	Generator Frequency
Measured 1	10/8/2019 1:28:09 PM
Linearity (-20.000 dBFS) (10/8/2019 1:28:09.166 PM)	

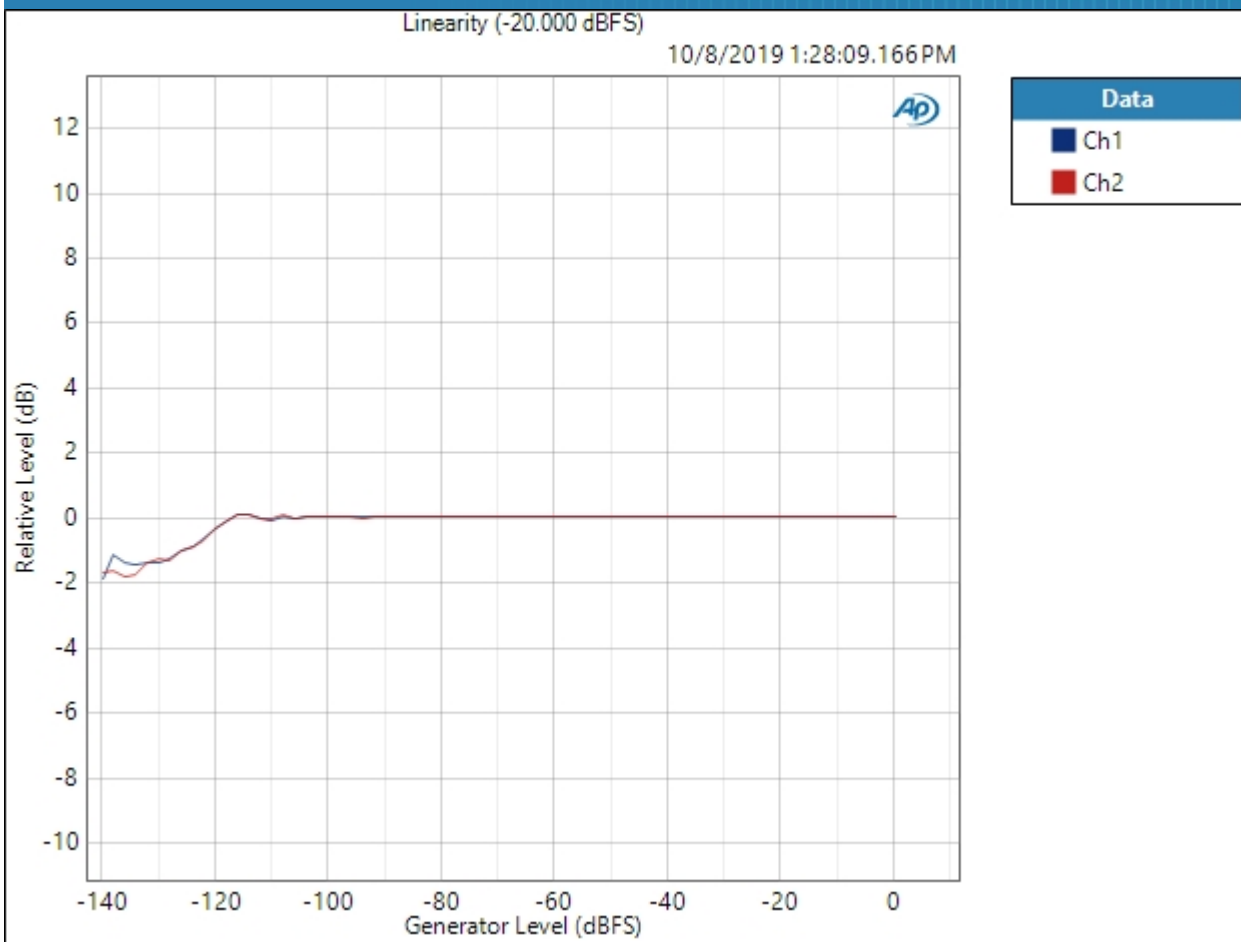

Linearity (-20.000 dBFS) Parameters

Mode: Normalized at Reference

Relative Level: -20.000 dBFS

Result: PASSED



Single Ended : Signal Path Setup

Output Connector:	ASIO
Output Sample Rate:	48.0000 kHz
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
High Performance Sine Analyzer:	Enabled
Input Bandwidth:	AC (<10 Hz) - 22.4k (48 kHz SR)
Device Delay:	0.000 s
Input EQ:	None
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V

Edge: Rising

Single Ended : Level and Gain

Waveform: Sine  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz

RMS Level (10/8/2019 1:28:18.316 PM)

Ch1 2.048 Vrms  
Ch2 2.052 Vrms

Single Ended : DC Level

Waveform: Sine  
Generator Level:  $-\infty$  dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Delay Time: 100.0 ms  
Acquisition Time: 333.0 ms


DC Level (10/8/2019 1:28:19.351 PM)

Ch1 -7.368 mV  
Ch2 -8.700 mV

Single Ended : Signal Analyzer 0dB


Waveform: Sine  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 10/8/2019 1:28:22 PM  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 32K  
Averaging: Power  
Averages: 3  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:28:22.963 PM)

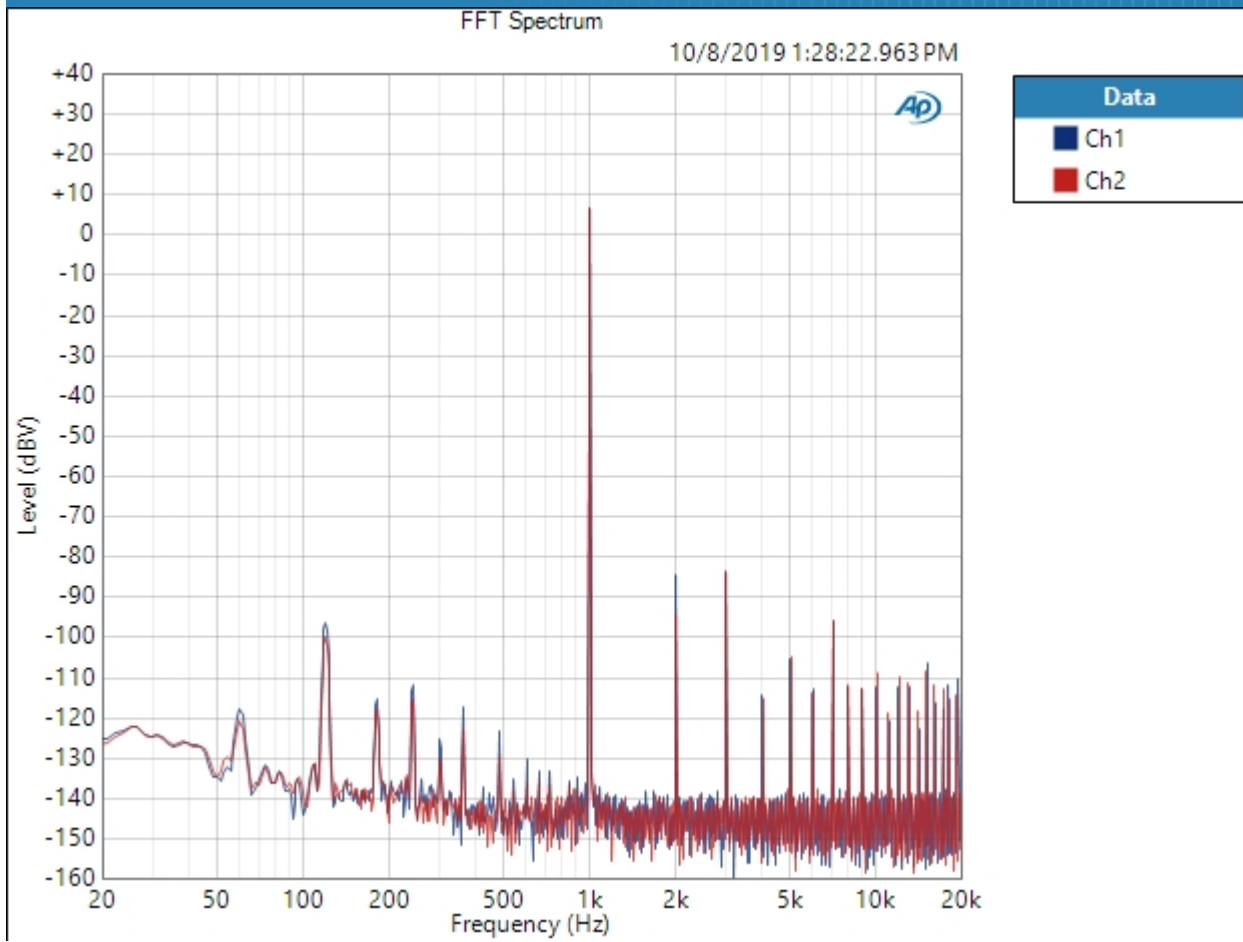


Result:  PASSED

Single Ended : Signal Analyzer -20dB  
Waveform: Sine  
Generator Level: -20.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 10/8/2019 1:28:26 PM  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 32K  
Averaging: Power  
Averages: 3  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)  
FFT Spectrum (10/8/2019 1:28:26.531 PM)

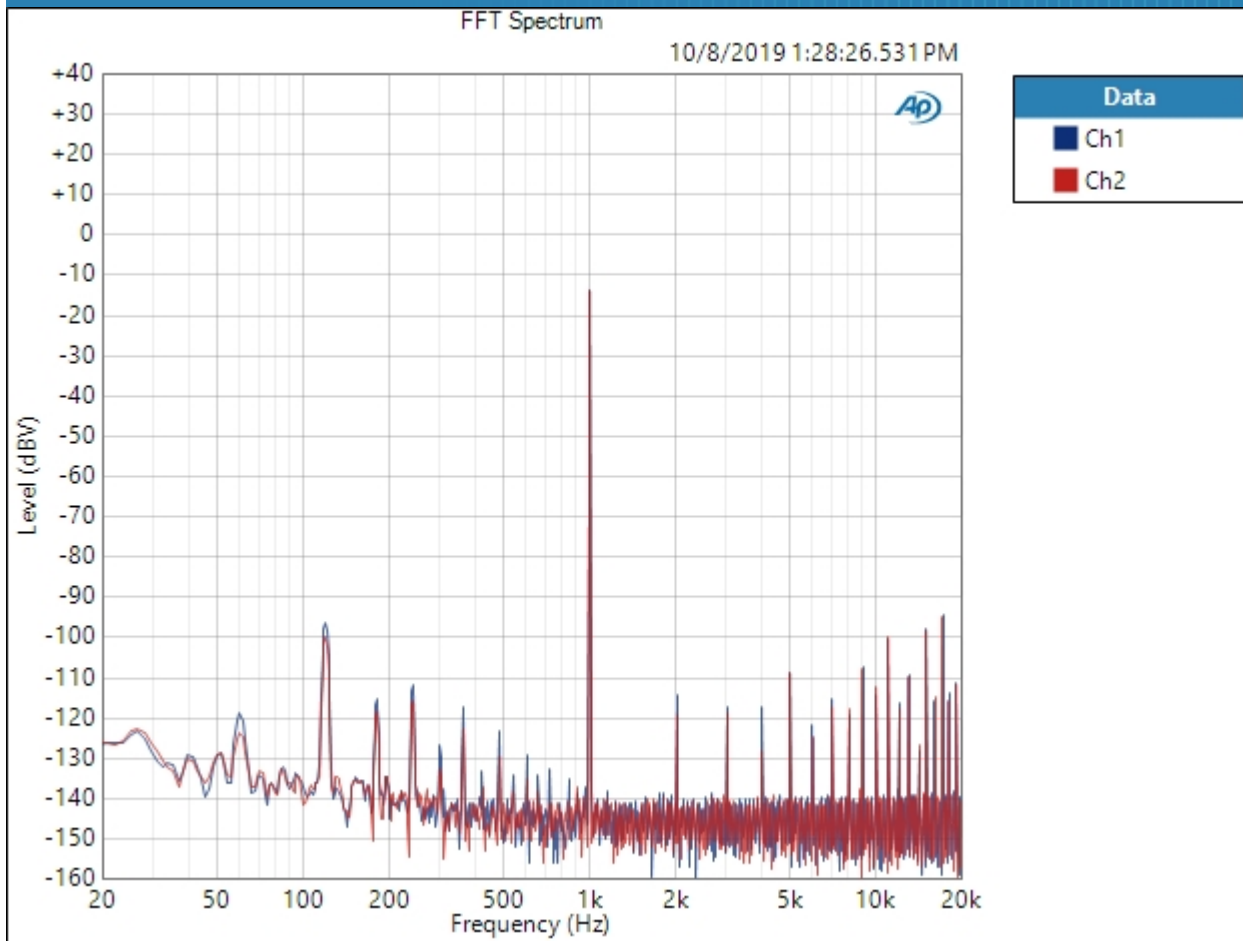

Result: PASSED

Single Ended : Signal Analyzer -60dB  
Waveform: Sine  
Generator Level: -60.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 10/8/2019 1:28:30 PM  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 32K  
Averaging: Power  
Averages: 3  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)  
FFT Spectrum (10/8/2019 1:28:30.133 PM)

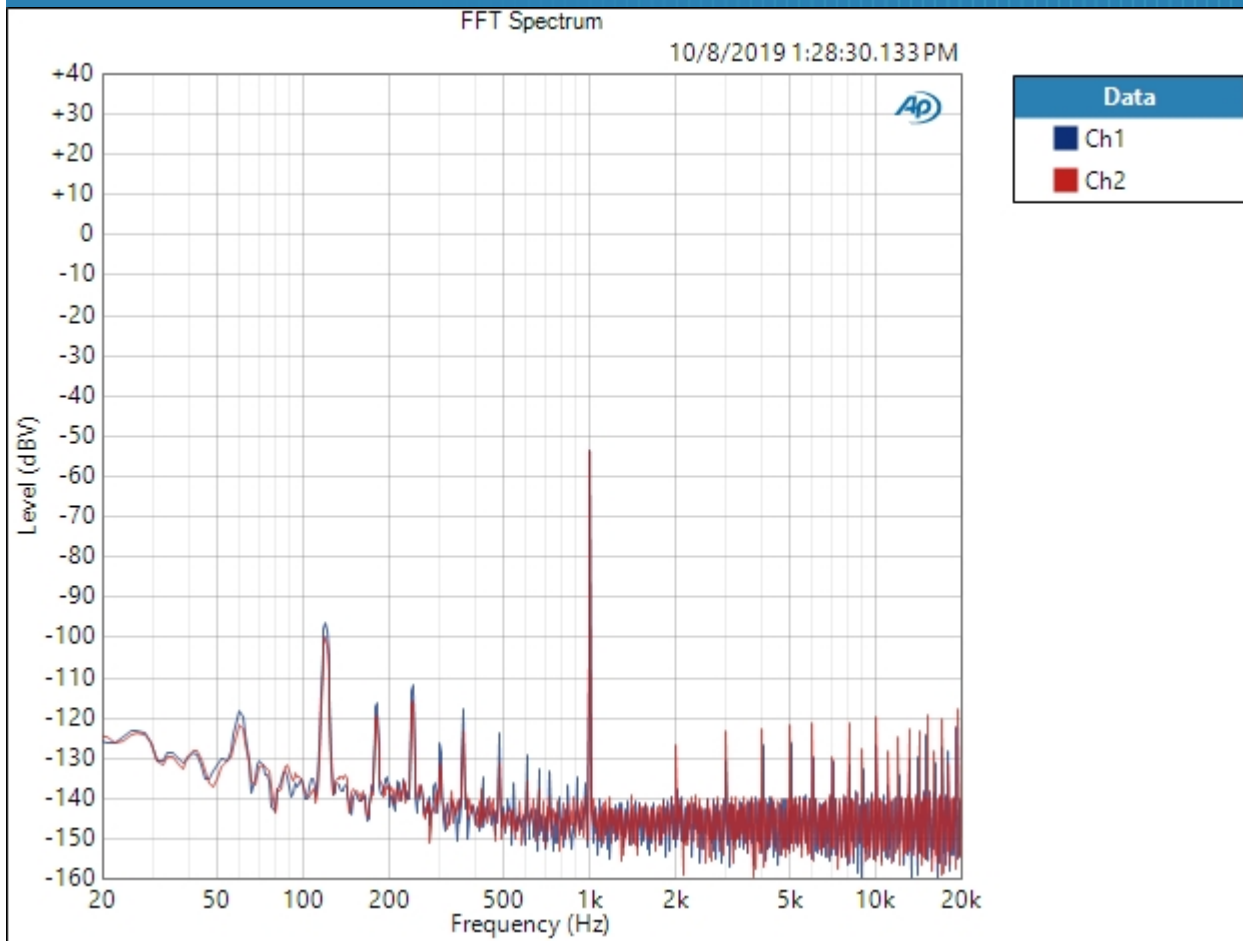


Result: PASSED



Single Ended : Signal Analyzer -120dB

Waveform: Sine  
Generator Level: -120.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 10/8/2019 1:28:48 PM  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 256K  
Averaging: Power  
Averages: 3  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:28:48.356 PM)

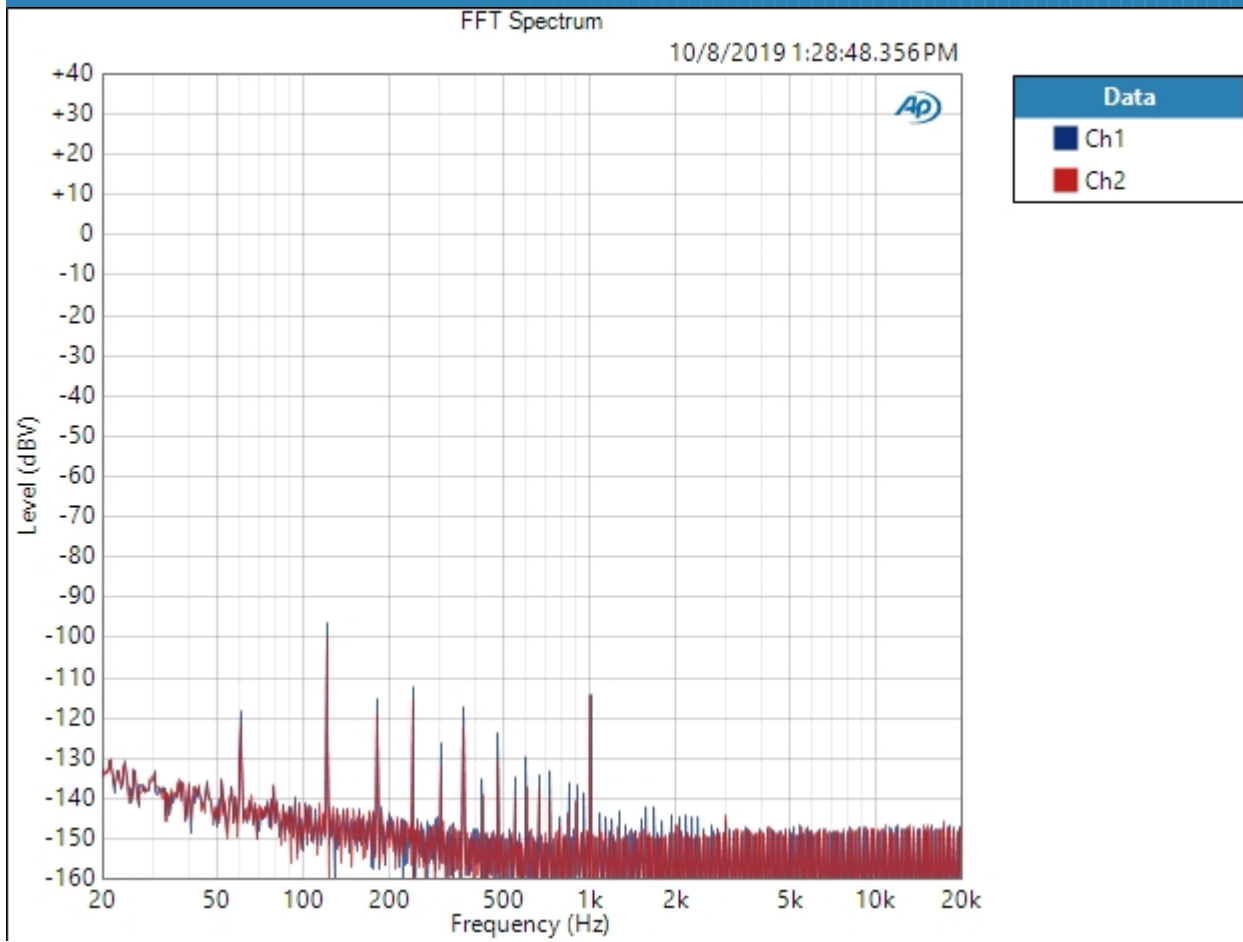


Result: PASSED

Single Ended : Signal Analyzer -144dB

Waveform: Sine  
Generator Level: -144.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 10/8/2019 1:29:06 PM  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 256K  
Averaging: Power  
Averages: 3  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (10/8/2019 1:29:06.596 PM)

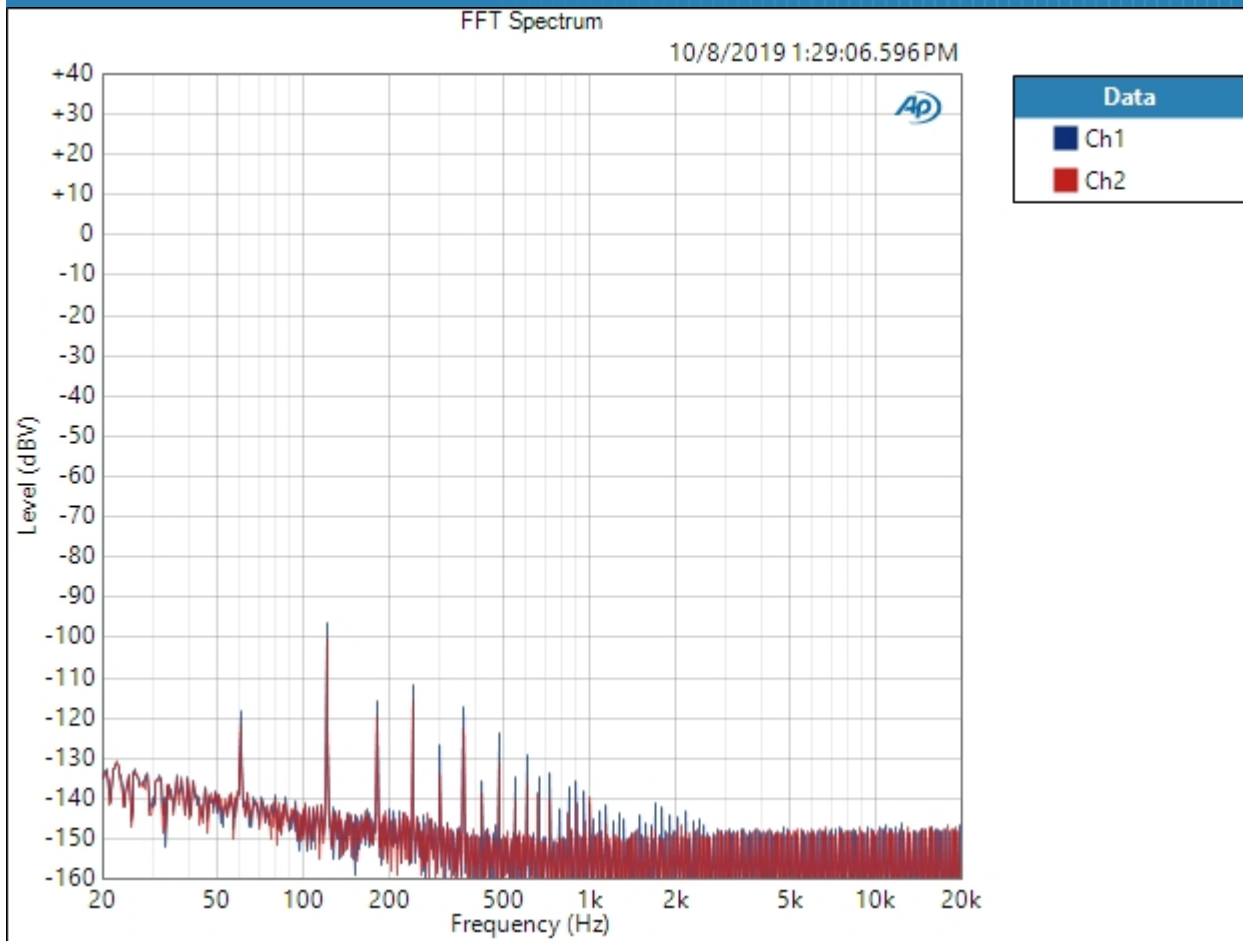


Result: PASSED

Single Ended : Frequency Response


Start Frequency: 20.0000 Hz  
 Stop Frequency: 20.0000 kHz  
 Generator Level: -0.000 dBFS  
 DC Offset: 0.000 D  
 EQ: None  
 Pre-Sweep: 100.0 ms  
 Sweep: 350.0 ms  
 Extend Acquisition By: 500.0 ms  
 Secondary Source: None  
 Measured 1 10/8/2019 1:29:09 PM

RMS Level (10/8/2019 1:29:09.379 PM)

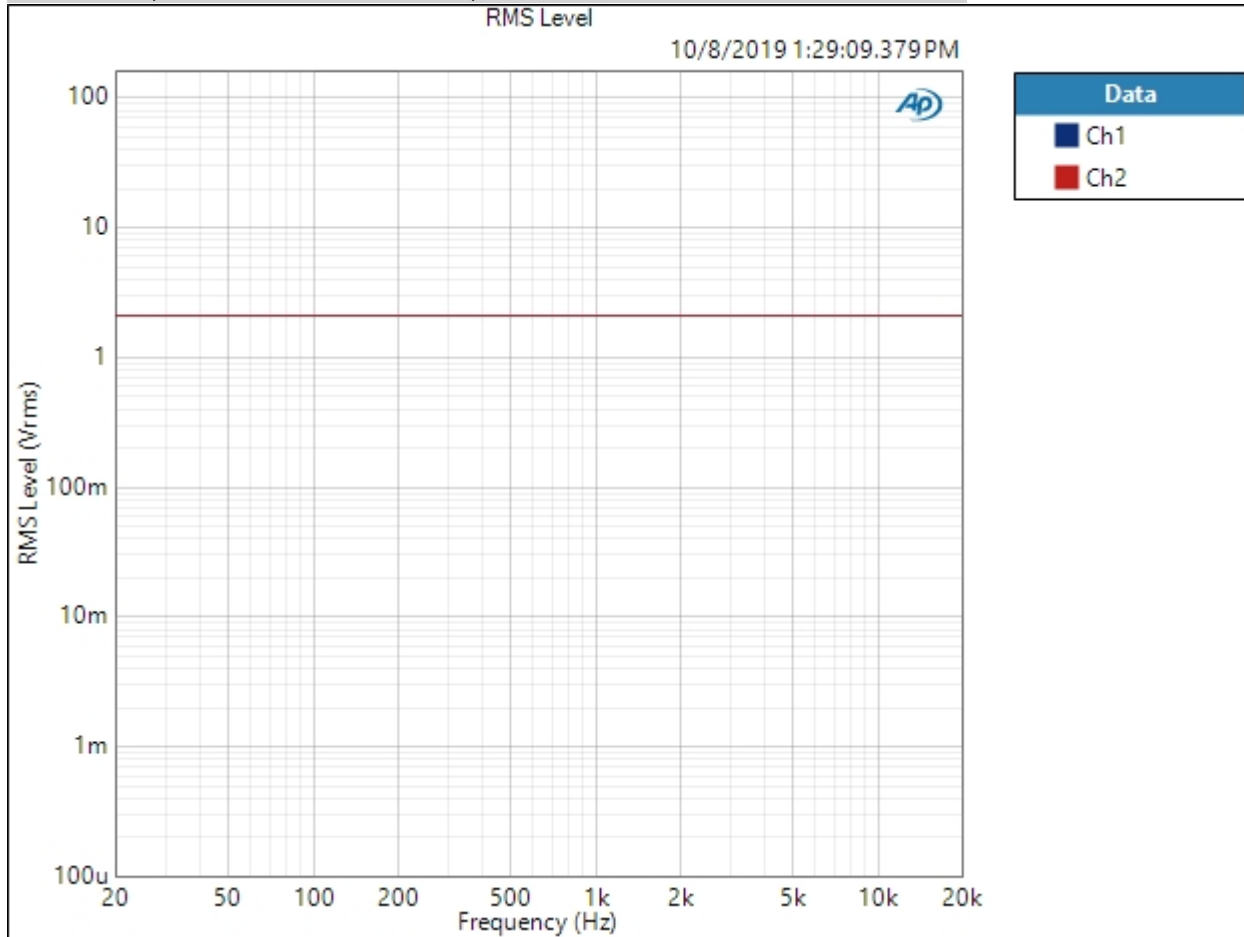

Result: PASSED

Relative Level (1.00000 kHz) (10/8/2019 1:29:09.379 PM)

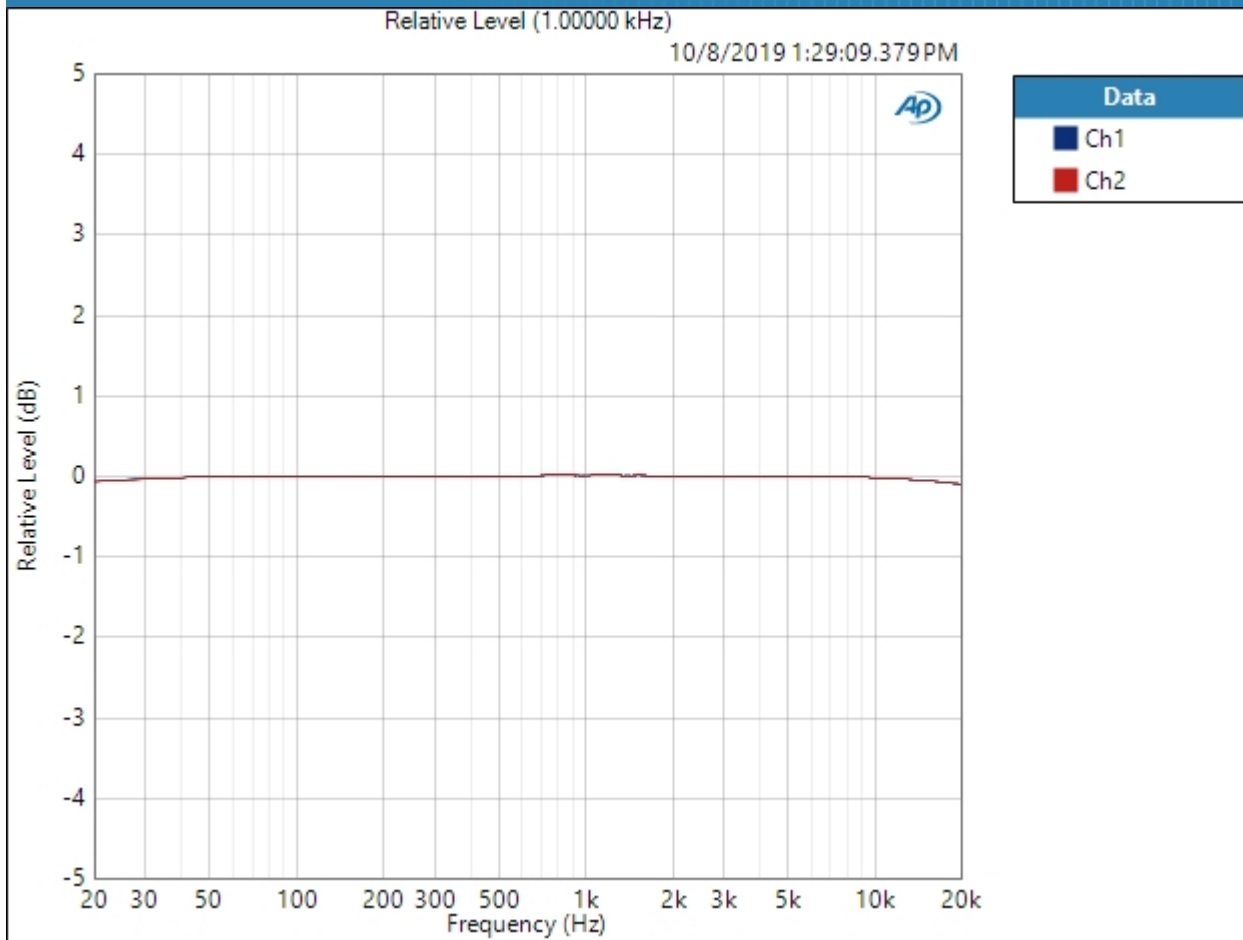

Relative Level (1.00000 kHz) Parameters

Mode: Normalized at Reference

Ref Frequency: 1.00000 kHz

Result: ✔ PASSED

Deviation (20.0000 Hz - 20.0000 kHz) (10/8/2019 1:29:09.379 PM)

Ch1  $\pm 0.057$  dB

Ch2  $\pm 0.054$  dB

Deviation (20.0000 Hz - 20.0000 kHz) Parameters

Min: 20.0000 Hz

Max: 20.0000 kHz

Single Ended : Signal to Noise Ratio

Waveform: Sine  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Low-pass Filter: 20 kHz  
Weighting Filter: A-wt.  
High-pass Filter: 20 Hz

Signal to Noise Ratio (10/8/2019 1:29:11.220 PM)

Ch1 113.767 dB  
Ch2 115.037 dB

Single Ended : THD+N

Waveform: Sine  
 Generator Level: -0.000 dBFS  
 DC Offset: 0.000 D  
 Frequency: 1.00000 kHz  
 Low-pass Filter: 20 kHz  
 Weighting Filter: Signal Path  
 High-pass Filter: 20 Hz  
 Notch Tuning Mode: Measured Frequency

THD+N Ratio (10/8/2019 1:29:13.258 PM)

Ch1 0.004407 %  
 Ch2 0.003463 %

THD Ratio (10/8/2019 1:29:13.258 PM)

Ch1 0.004350 %  
 Ch2 0.003433 %

Noise Ratio (10/8/2019 1:29:13.258 PM)

Ch1 0.000798 %  
 Ch2 0.000550 %

Distortion Product Ratio (10/8/2019 1:29:13.258 PM)

Channel	F	H2	H3	H4	H5	H6	H7	H8	H9	H10
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch1	-0.00	-90.72	-90.17	-118.62	-111.39	-126.31	-102.82	-122.39	-122.97	-119.49
Ch2	-0.00	-99.93	-89.97	-122.09	-111.31	-125.47	-103.68	-126.15	-129.05	-124.34

Distortion Product Ratio Parameters


Frequency Unit: Hz  
 Ratio Unit: dB



Single Ended : IMD Level Sweep ( CCIF )

IMD Type: CCIF  
Waveform: IMD  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Mean Frequency: 12.5000 kHz  
Diff Frequency: 80.0000 Hz  
IMD Split: False  
Start Level: -60.000 dBFS  
Stop Level: -0.000 dBFS  
Step Type: Linear  
Number of Points: 31  
Step Size: +2.000 dBFS  
Mode: d2  
Measured 1 10/8/2019 1:29:25 PM

CCIF Ratio (10/8/2019 1:29:25.918 PM)

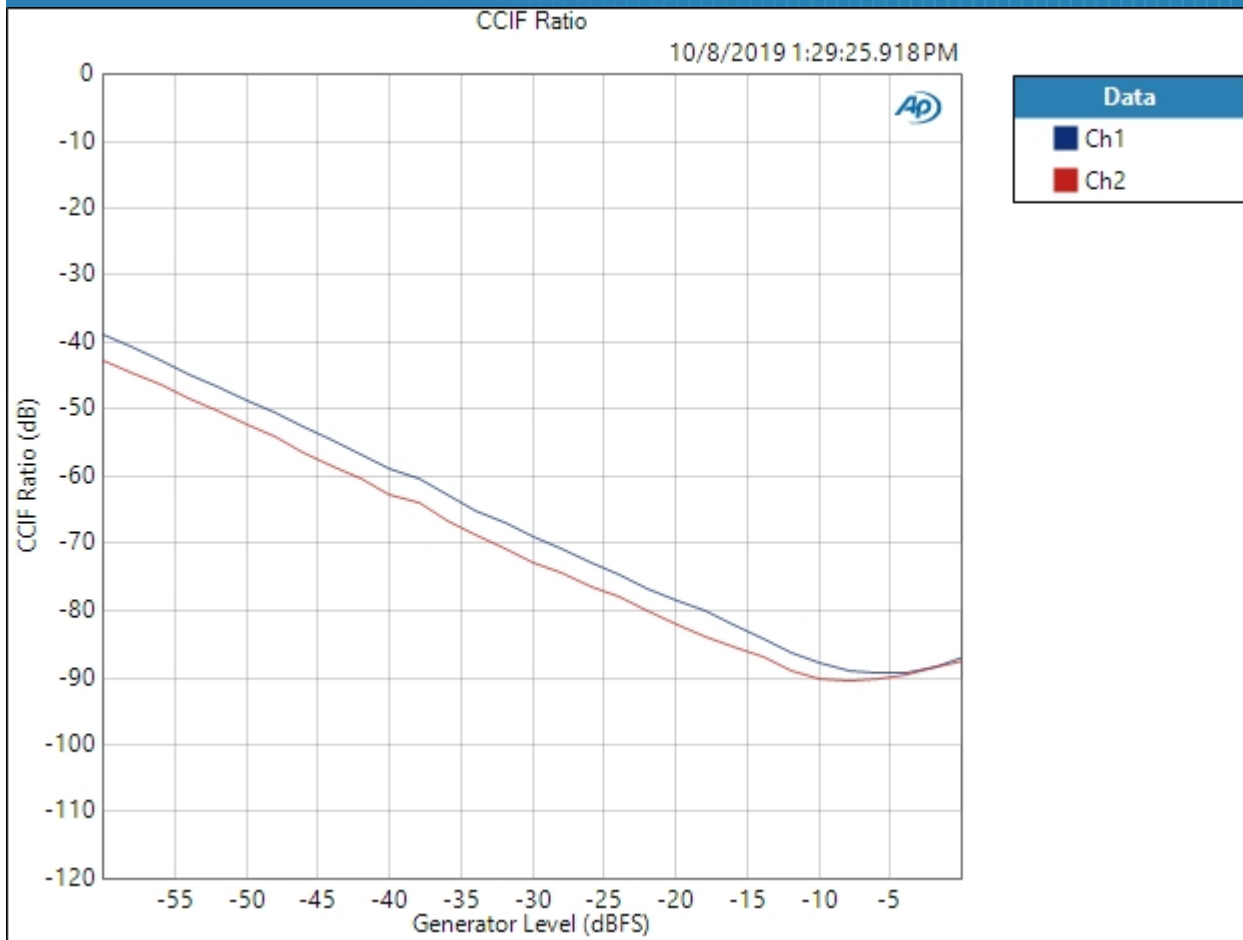


Result: PASSED

Single Ended : IMD Frequency Sweep ( CCIF )

Generator Level: -0.000 dBFS  
 DC Offset: 0.000 D  
 Sweep Frequency: Mean Frequency  
 Mean Frequency: 12.5000 kHz  
 Diff Frequency: 80.0000 Hz  
 IMD Split: False  
 Start Frequency: 20.0000 kHz  
 Stop Frequency: 250.000 Hz  
 Step Type: Logarithmic  
 Number of Points: 31  
 Mode: d2  
 Measured 1 10/8/2019 1:29:33 PM

CCIF Ratio (10/8/2019 1:29:33.858 PM)

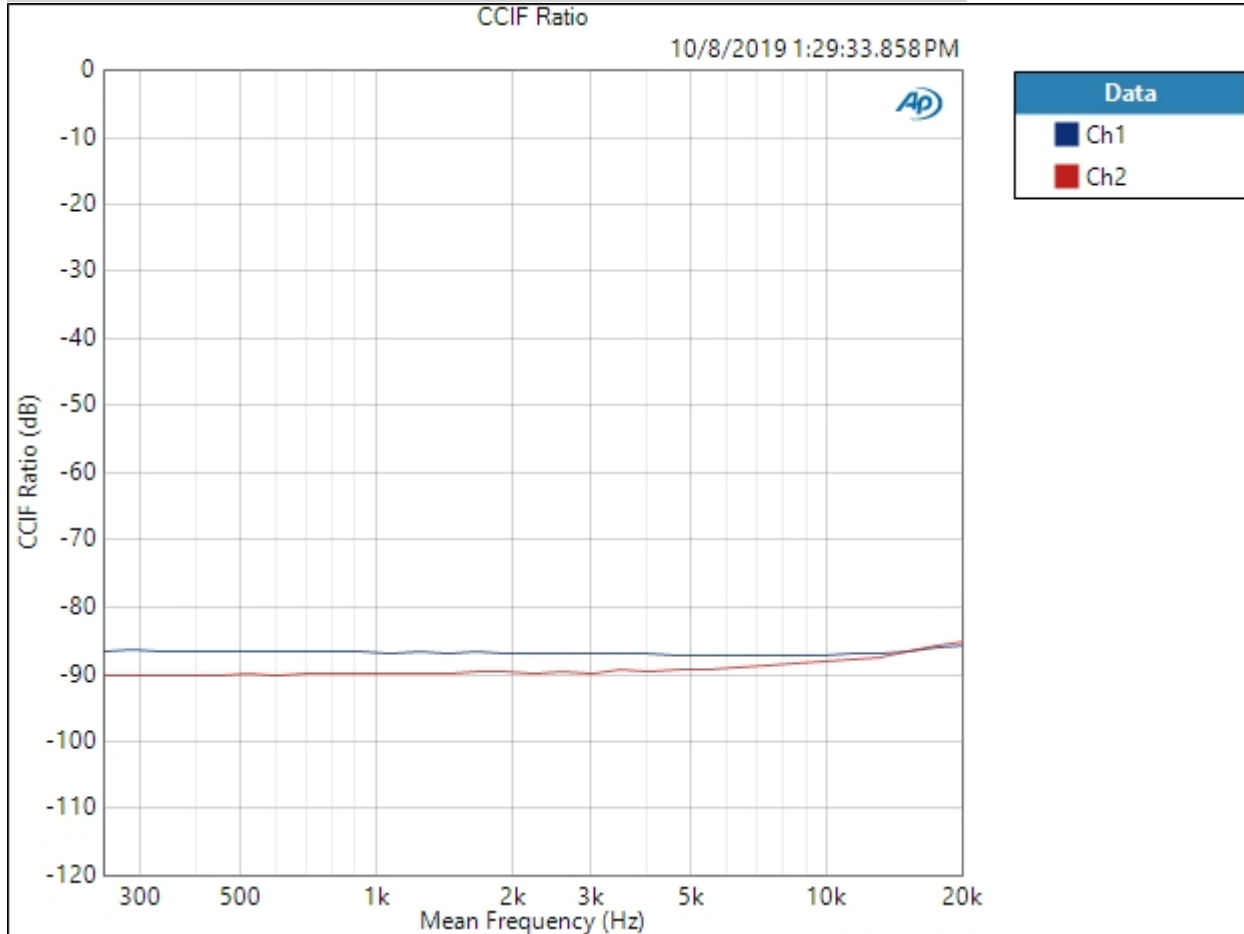

Result:  PASSED

Single Ended : Crosstalk, One Channel Undriven

Waveform: Sine

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Frequency: 10.0000 kHz

Crosstalk (10/8/2019 1:29:34.997 PM)

Ch1 -93.585 dB

Ch2 -88.667 dB

Single Ended : Crosstalk Sweep, One Channel Driven

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Start Frequency: 20.0000 kHz


Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 15

Measured 1 10/8/2019 1:30:20 PM

Crosstalk (10/8/2019 1:30:20.511 PM)

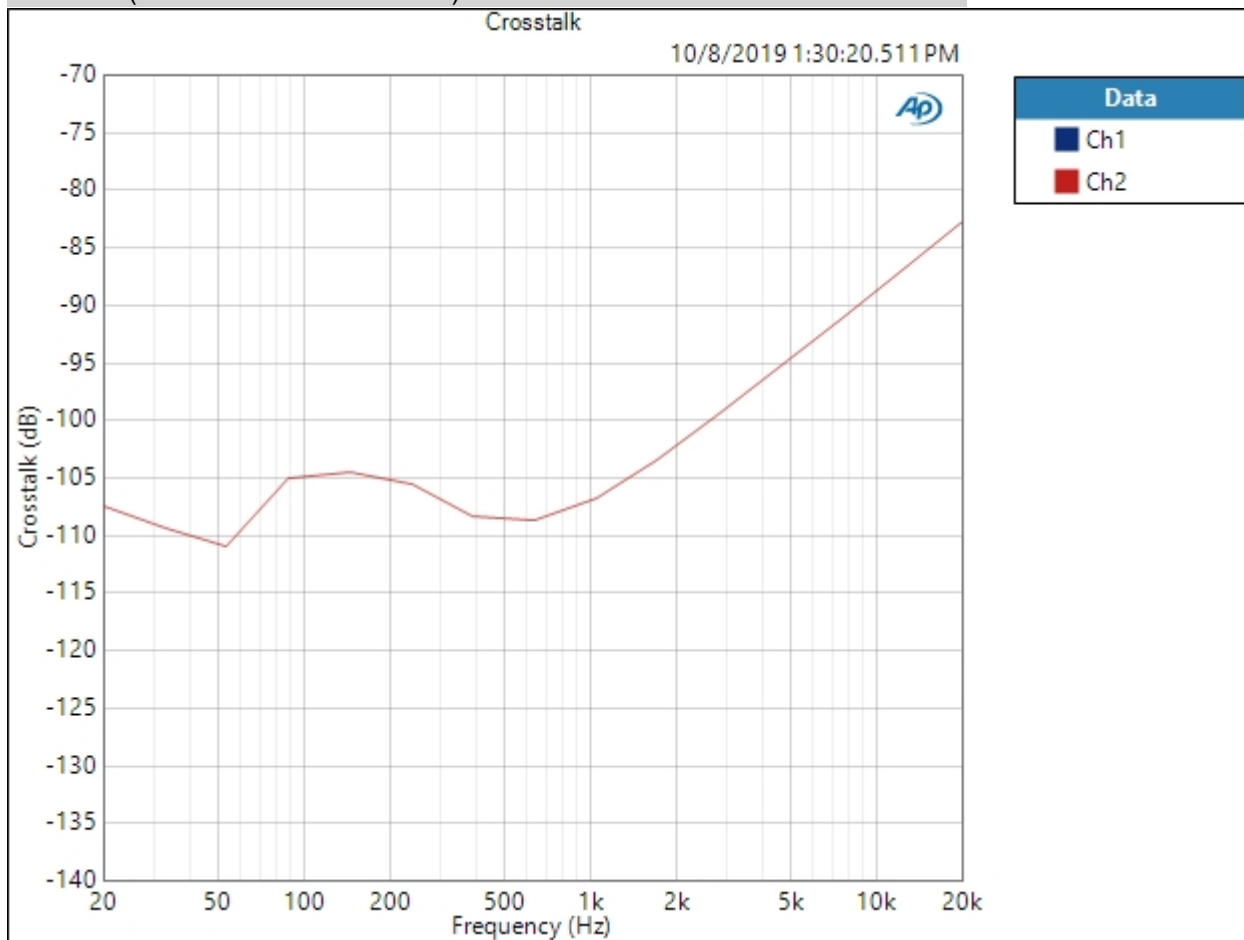


Crosstalk Parameters

Source: Ch1

Result: PASSED

Single Ended : Bandpass Level Sweep

Waveform:	Sine
Generator Level:	-20.000 dBFS
DC Offset:	0.000 D
Frequency:	1.00000 kHz
Start Level:	-140.000 dBFS
Stop Level:	-0.000 dBFS
Step Type:	Linear
Number of Points:	71
Step Size:	+2.000 dBFS
Offset:	0.000 D
Selectivity:	Window width
Bandpass Tuning Mode:	Generator Frequency
Measured 1	10/8/2019 1:32:25 PM
Linearity (-20.000 dBFS) (10/8/2019 1:32:25.945 PM)	

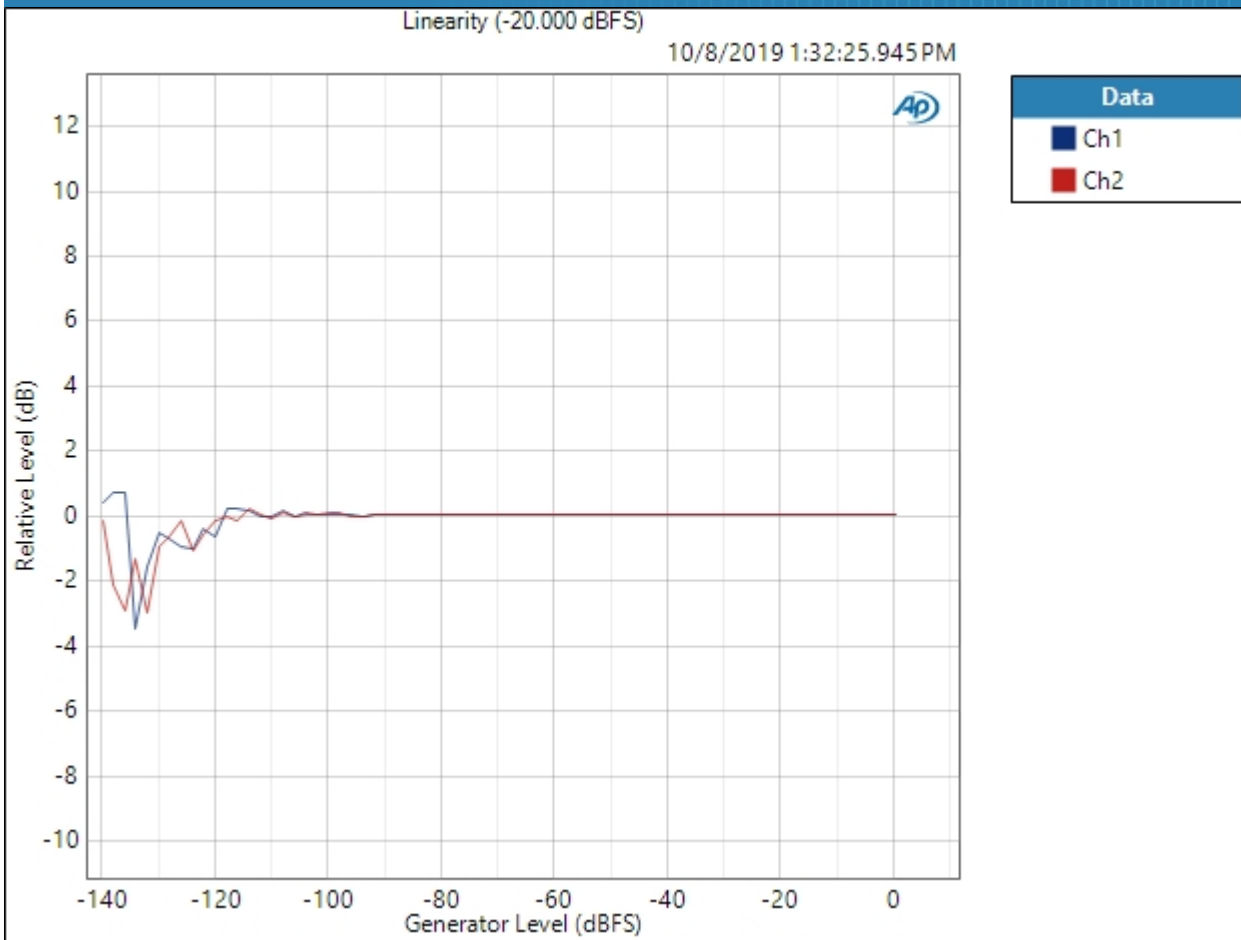

Linearity (-20.000 dBFS) Parameters

Mode: Normalized at Reference

Relative Level: -20.000 dBFS

Result: PASSED

Jitter : Signal Path Setup

Output Connector:	Digital Optical
Output Sample Rate:	44.1000 kHz
Output Bit Depth:	24
Dither:	Enabled
Output Mode:	Consumer
Status Bits:	Auto (Consumer)
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
High Performance Sine Analyzer:	Disabled
Input Bandwidth:	AC (<10 Hz) - 22.4k (48 kHz SR)
Device Delay:	0.000 s
Input EQ:	None
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled



- Triggers

Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising

Jitter : Jitter Level Sweep


• Audio Generator

Waveform: Sine  
 Generator Level: -0.000 dBFS  
 DC Offset: 0.000 D  
 Frequency: 1.00000 kHz

• Jitter Generator


Jitter Waveform: Sine  
 Start Level: 5.000 ps  
 Stop Level: 5.000 ns  
 Step Type: Logarithmic  
 Number of Points: 31  
 Jitter Frequency: 1.00000 kHz  
 Low-pass Filter: 20 kHz  
 Weighting Filter: Signal Path  
 High-pass Filter: 20 Hz  
 Notch Tuning Mode: Generator Frequency  
 Secondary Source: None  
 Measured 1 10/8/2019 1:32:45 PM

THD+N Level (10/8/2019 1:32:45.083 PM)

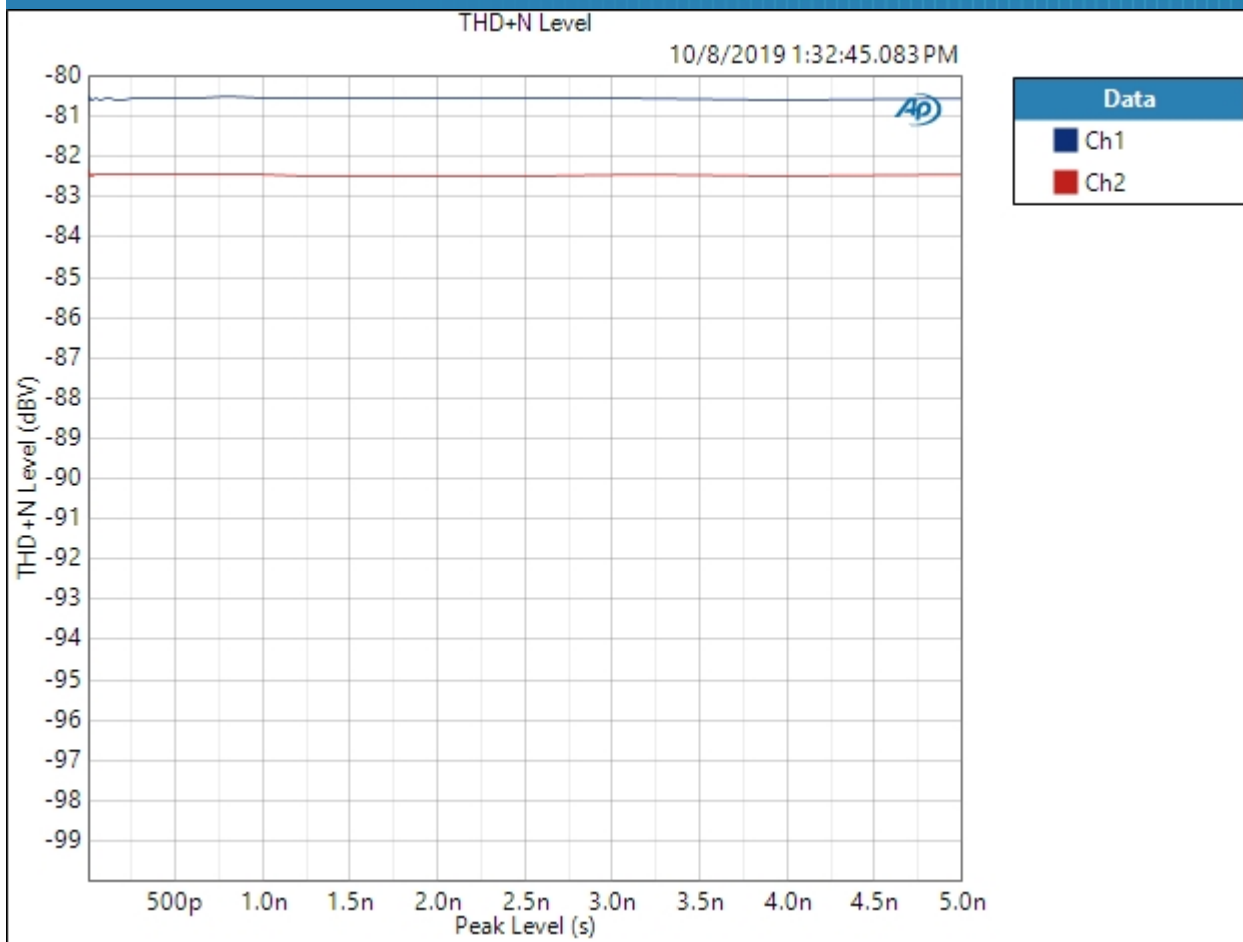

Result: PASSED

Distortion Product Level (H2) (10/8/2019 1:32:45.083 PM)

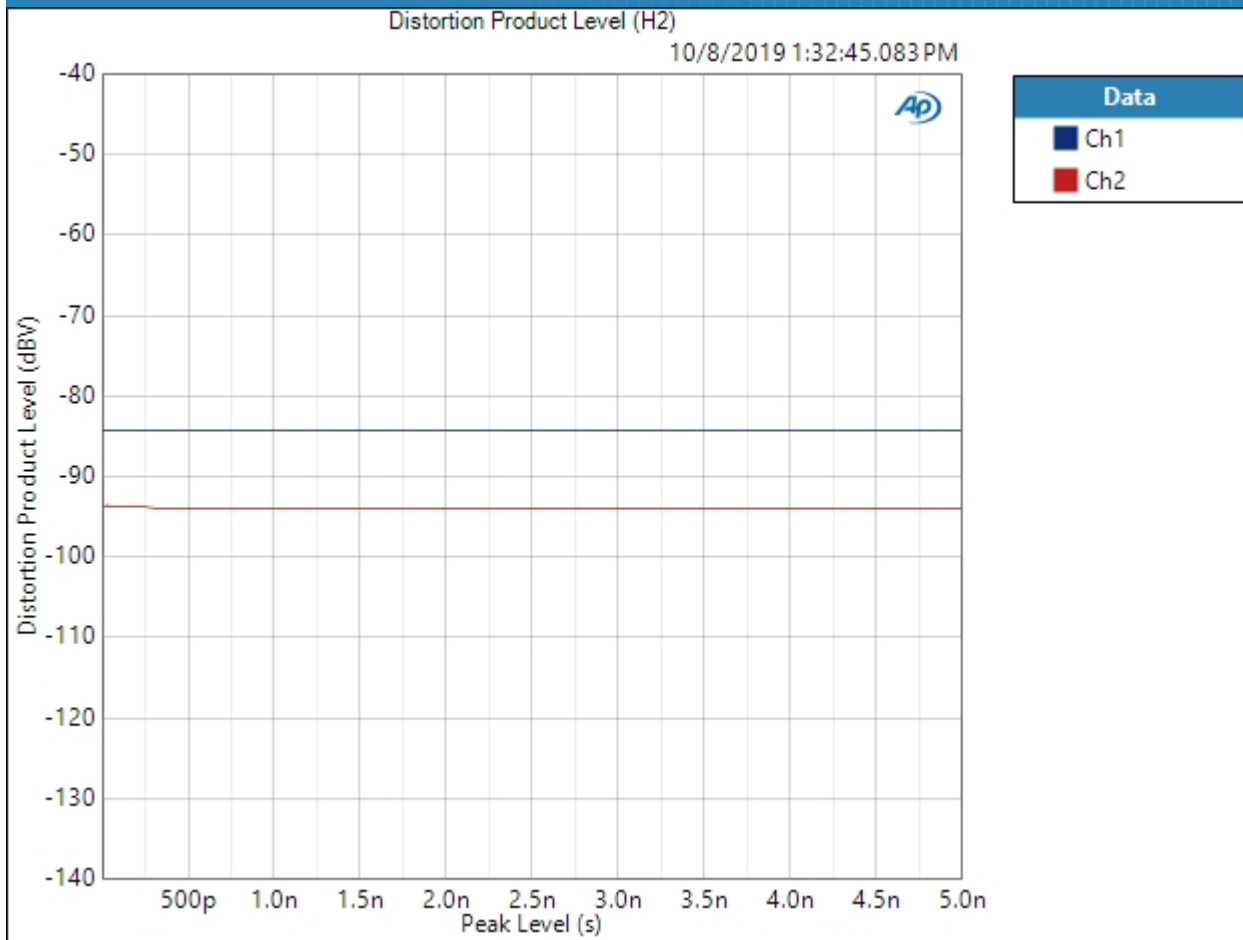

Distortion Product Level (H2) Parameters

Harmonics: Single Harmonic

Harmonic Number: 2

Result: PASSED