


GJALLARHORN^F

COMPACT SPEAKER AMP

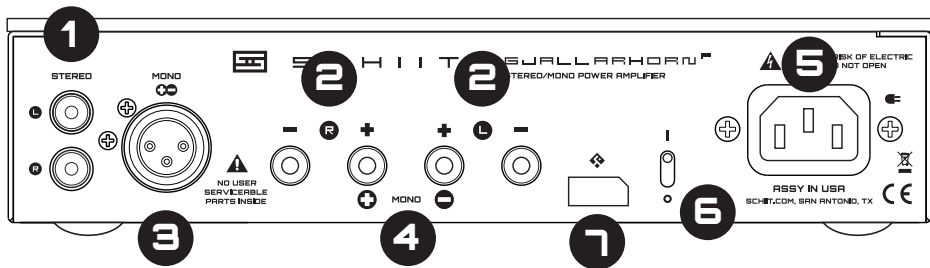

STEREO

1 Connect a stereo source to the RCA jacks. Connect both left and right channels. Don't connect anything to the XLR socket.

2 Connect both left and right speakers. Use banana-terminated cables. "L" is left, and "R" is right. Black is ground, red is hot.

MONO

3 Connect a mono balanced source to the XLR jack. You'll need an XLR cable. Don't connect anything to the RCA inputs.

4 Connect one speaker to the two center jacks. "+" is positive, "-" is negative. Both

are active. Don't short the negative sides together, or the amp may go into protection.


POWER

5 Connect the power cord here. The amp won't work wirelessly; we're not Nikola Tesla!

6 Turn the amp on and off with this switch. There will be a short delay, about 10 seconds, until the relay clicks in. And then you'll have music!

FORKBEARD

7 Plug a Forkbeard module in here for amp health, standby, and enhanced system functionality with other Schiit products.

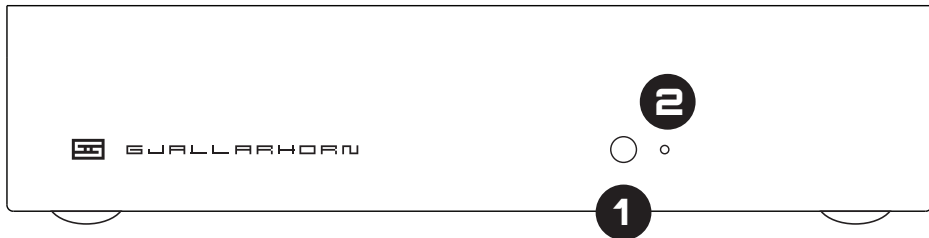

1 Press this button to mute. Gjallarhorn uses very little power in use, but muting its output reduces it further.

2 When the amp is operational, this LED is lit. When it's muted, the LED will pulse slowly.

PROTECTION

Gjallarhorn includes protection against over-current, over-temperature, and excessive DC.

If Gjallarhorn clicks and the LED flashes, it's gone into protection mode. System health is also reported via Forkbeard. Check the following:

Are speaker cables shorted? Shorted cables will cause Gjallarhorn to go into protection.

Is there a speaker problem? Sometimes, speakers can short internally. Check with a voltmeter or try a different pair of speakers.

Are you using low-impedance, inefficient speakers? Gjallarhorn may protect with very low impedance or inefficient speakers.

Are you listening very loudly? Gjallarhorn is a capable amplifier, but it's best on the desktop or in a small room. If you need a ton of power, Vidar is a better choice.

IN THE BOX

- (1) Gjallarhorn
- (1) Power Cord
- (1) Forkbeard Module
(if you ordered it)

(Infinite) Appreciation
from the whole
Schiit crew



FORKBEARD
ENABLED



WARNING: TO REDUCE THE RISK OF FIRE
OR ELECTRIC SHOCK, DO NOT EXPOSE THIS
DEVICE TO RAIN OR MOISTURE.



This product is in compliance with standards
and regulations of the European Community.

WARRANTY

Schiit Audio warrants to the original purchaser that this product shall be free from defects in material and workmanship for five (5) years from the date of purchase. If a defect covered by this warranty occurs during this period, Schiit Audio will repair the defective product, free of charge. Date of purchase will be based on customer receipts, otherwise date of manufacturing will be used.

If you believe you need warranty service, contact us first. Schiit Audio products sent back to us without a Return Authorization (RA) will be returned to the sender without repair. To contact us and obtain an RA, email info@schitt.com.

Warranty Limitations. This warranty shall not apply if a product: (a) is modified or tampered with; (b) is damaged by negligence, accident, unreasonable use, or other causes unrelated to defective materials or workmanship, or (c) has had the serial number altered or removed.

Any implied warranties, including warranties of merchantability and fitness for a particular purpose, are hereby limited in duration to the warranty period of 5 years. In no event shall Schiit Audio be liable for consequential or incidental damages resulting from the breach of any implied or expressed warranties. Some states do not allow these limitations, so they may not apply to you. You may also have other rights which vary from state to state or province to province.

SCHIIT.COM
INFO@SCHIIT.COM

